


# RunCam TX25

1S 3.5-5.5V 5.8G 48CH 25mW Video Transmitter

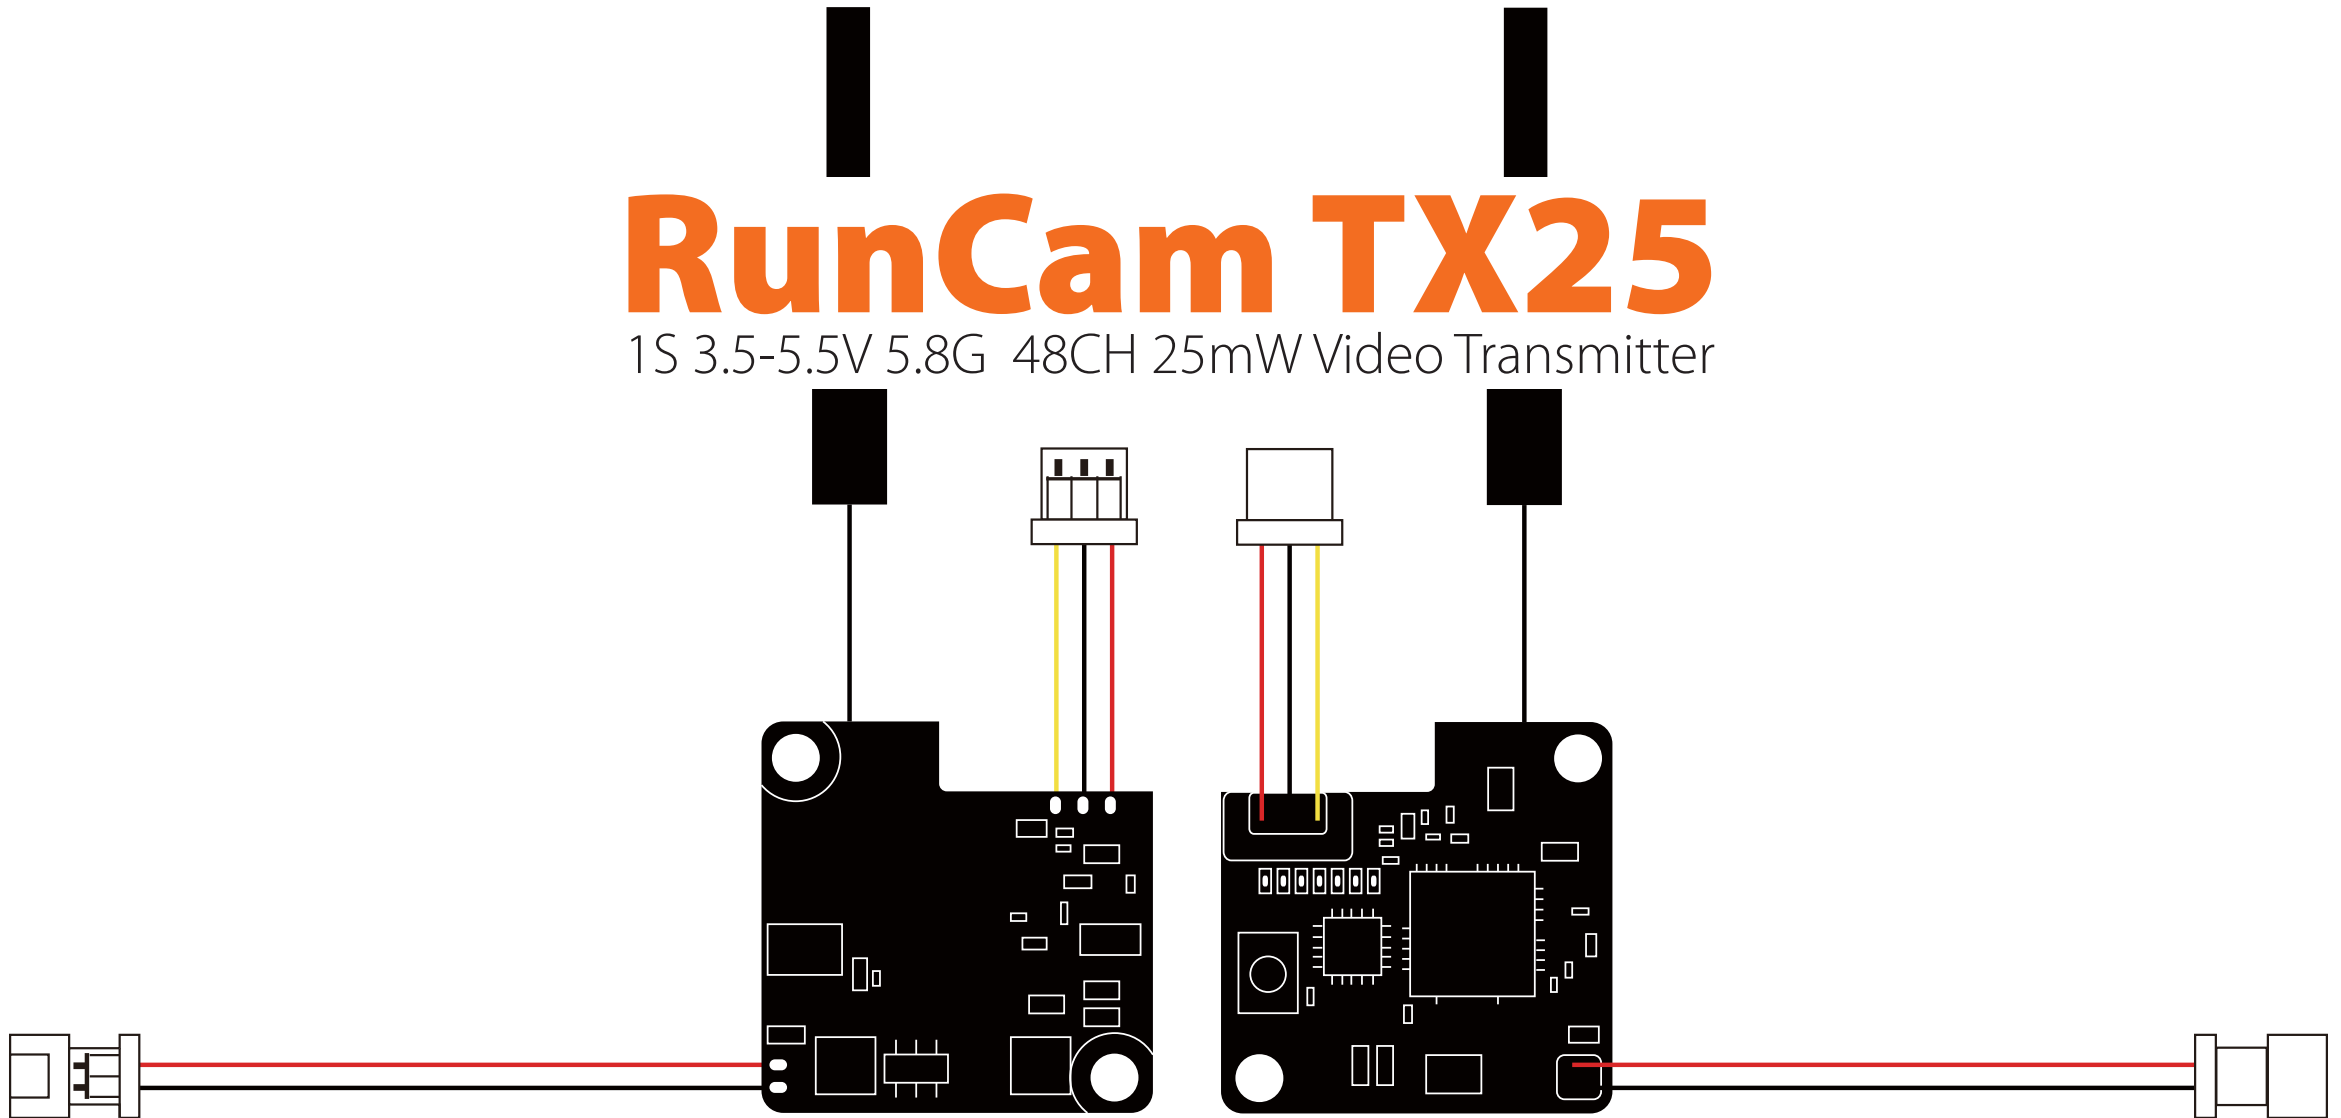

## Parameter

Frequency Channel: 5.8G 6 Band 48CH

Output Power: 13dBm / 25mW

Voltage in: 1S 3.5-5.5V

Working Current: 5V@ 150mA

Voltage out: 4.5V@max 250mA

Video Input Impedance: 75 Ohm

Antenna : 5.8G 2dB Omni antenna

PCB Size: 19mm\*19mm

Weight: 2.5g (with antenna)

## Frequency Setup

### 1 Blue LED for Channel

Short press the button to switch the Channel,  
Channel 1/2/3/4/5/6/7/8 in sequence.


For each short press, the Blue LED flashes once,  
and only when it's under the Channel 1,  
the LED is always on.

### 6 Red LED for Band

Long press the button two seconds to switch the Band,  
Band 1/2/3/4/5/6 in sequence.

For each long press, the six Red LEDs light in turn.

## Instruction diagram

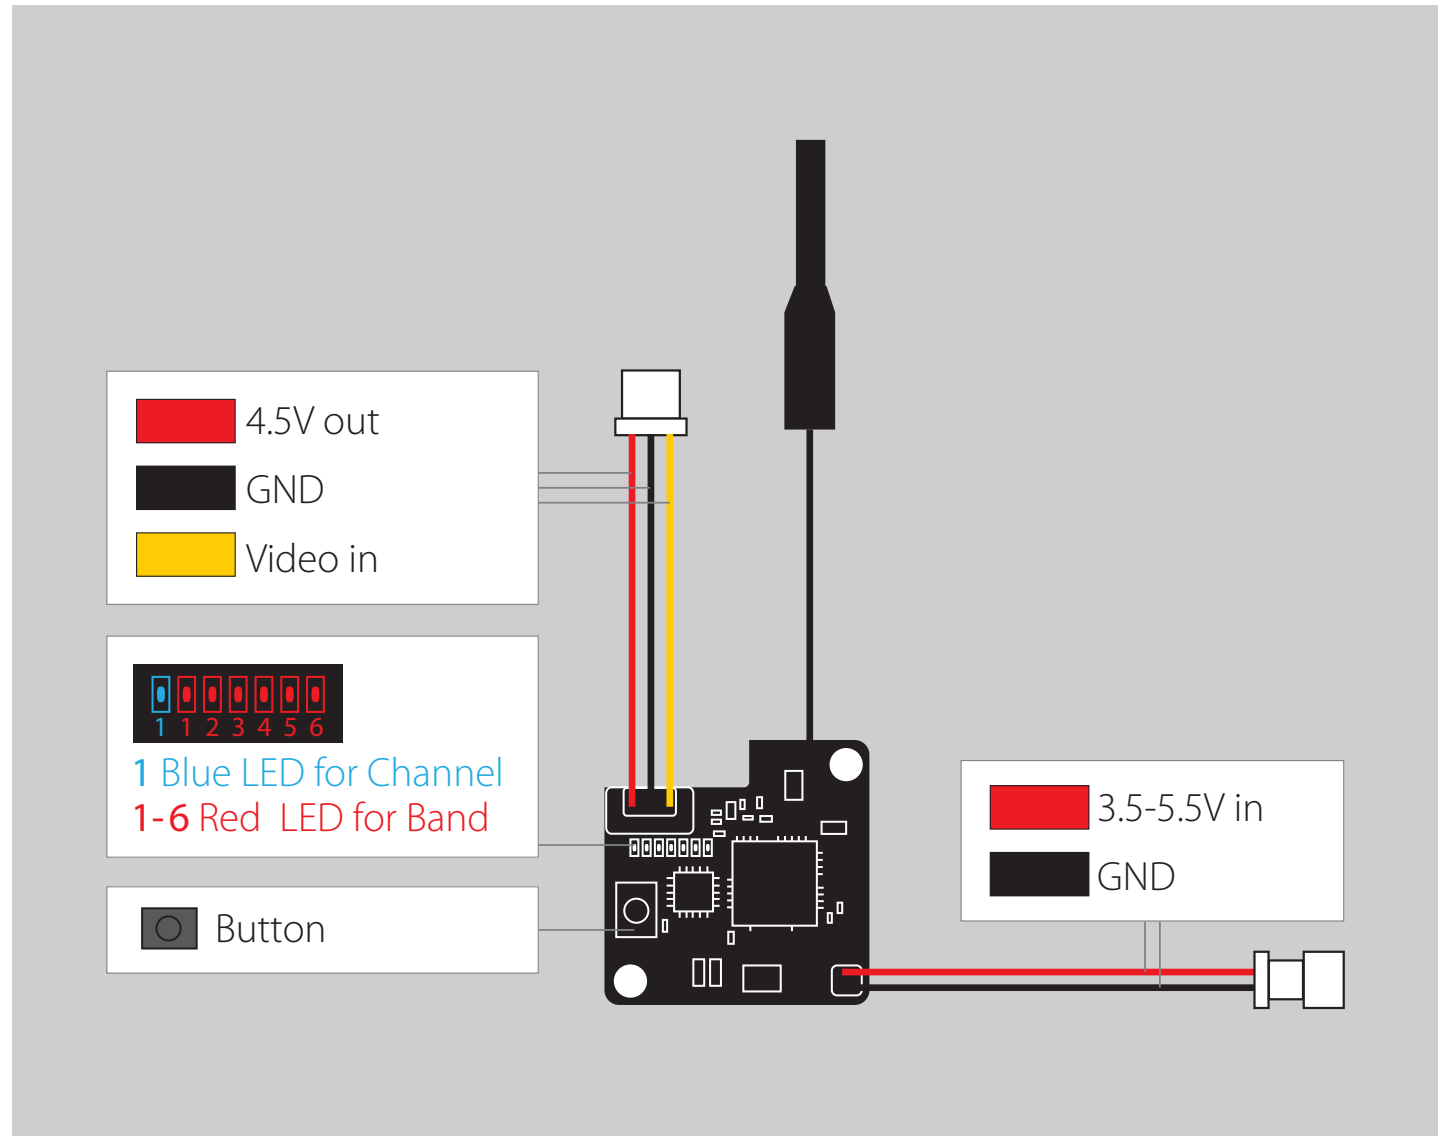

## Frequency Table

Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band 1	5865	5845	5825	5805	5785	5765	5745	5725
Band 2	5733	5752	5771	5790	5809	5828	5847	5866
Band 3	5705	5685	5665	5645	5885	5905	5925	5945
Band 4	5740	5760	5780	5800	5820	5840	5860	5880
Band 5	5658	5695	5732	5769	5806	5843	5880	5917
Band 6	5325	5348	5366	5384	5402	5420	5438	5456

[www.runcam.com](http://www.runcam.com)