
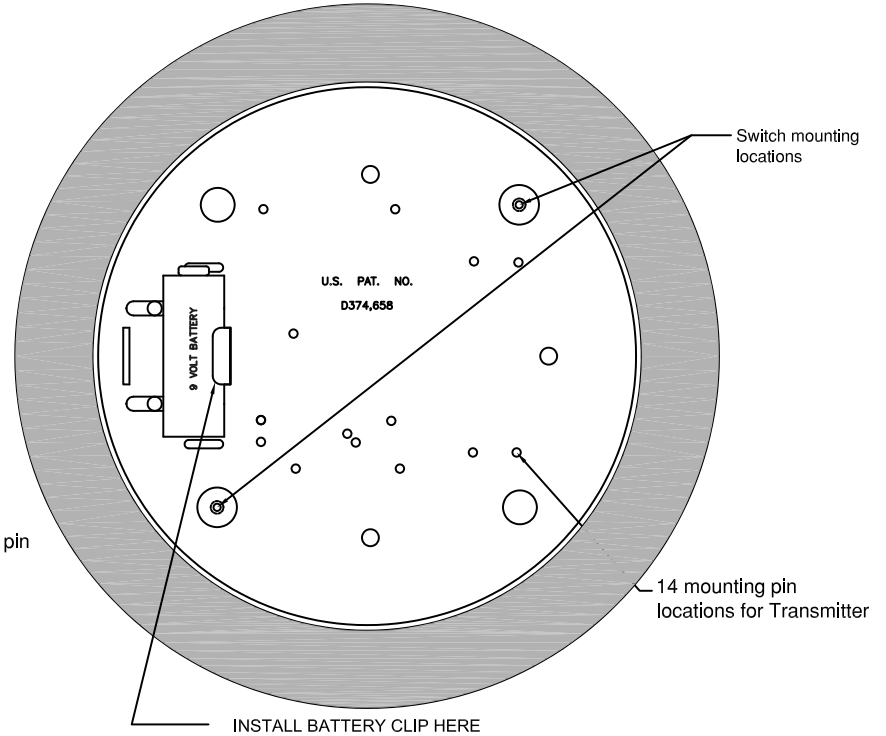
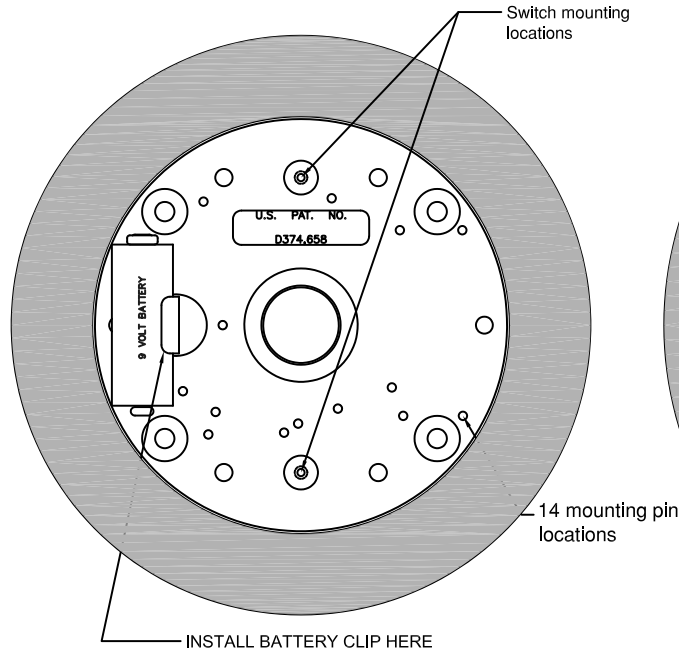


N4RF


6-3/8" Diameter X 2-1/8" Height (162mm x 55mm)
 1-7/8" Inside depth (48mm)
 Used with 4-1/2" round switches

N6RF

7-3/4" Diameter X 2-1/8" Height (197mm x 55mm)
 1-7/8" Inside depth (48mm)
 Used with 6" round switches

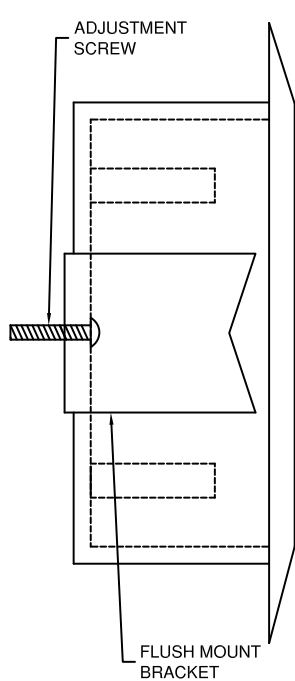

- > Mounting bracket for hollow walls
- > Flush mount black ABS material for wireless or hard-wired applications; wireless use requires RF-Transparent walls.
- > Repositionable mounting pins for transmitter placement
- > Weather resistant gasket (optional)
 N4WR used with N4RS
 N6WR used with N6RS

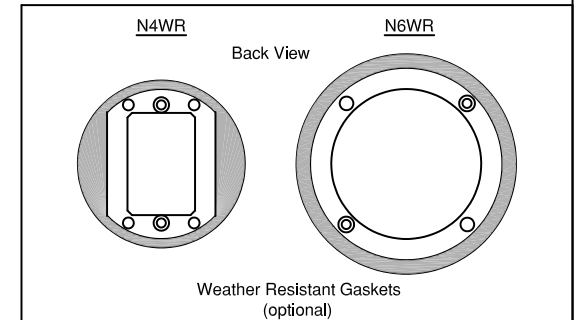

Wikk Industries, Inc.
 6169 Industrial Court
 Greendale, WI 53129-0167
 Phone: 414-421-9490
 Fax: 414-421-3158

SCALE N.T.S.	DRAWN BY/DATE JK/07NOV11	CHECKED BY/DATE LK/07NOV11
-----------------	-----------------------------	-------------------------------

TITLE
N4RF/N6RF FLUSH MOUNT

DRAWING NUMBER
SWITCHES\BINDER DETAILS SWITCHES\N4RS-F N6RS-F INSTRUCTIONS

For surface mount use N4RS / N6RS

Parts included with mounting boxes:

- > Black ABS surface or flush box
- > Transmitter mounting pins
- > 9V. battery mounting clip
- > Mounting instructions
- > Weather resistant gasket (optional)

N4RS and N6RS SURFACE MOUNT

Hollow Wall or Solid Wall (Illustration #1)

- 1.) Drill pilot holes in mounting box
(placement indications are in box)
- 2.) Drill pilot holes in mounting surface
- 3.) Insert appropriate fastener (screw, toggle, etc.)
through box and into mounting surface; tighten
- 4.) Complete installation of switch

N4RF and N6RF FLUSH MOUNT

Hollow Wall Only (Illustration #2)

- 1.) Cut access hole into mounting surface
5 1/2" diameter for 4-1/2" round box
6 1/2" diameter for 6" round box
- 2.) Insert box into the hole
- 3.) Utilize the two Phillips head
screws to tighten silver hanger
to the mounting surface
- 4.) Complete installation of switch

CROSS SECTIONAL VIEWS

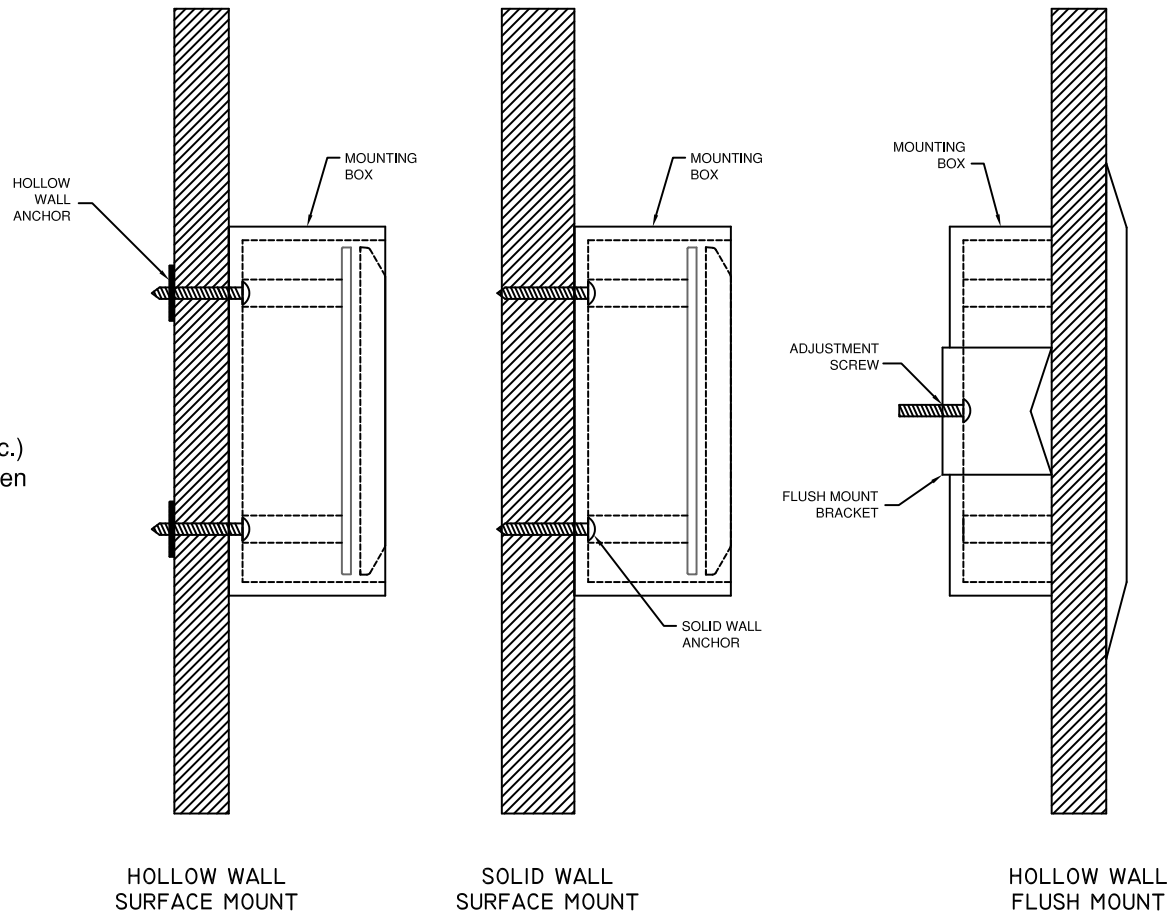


ILLUSTRATION #1

ILLUSTRATION #2