



APPLICATIONS

Ideal for:-

- Average homes with modern appliances to large double storey homes
- Domestic water supply
- Pressure boosting
- Automatic water transfer



The Everyday Series with Pressure Switch

Home Pressure System

Model Numbers: E1P (XJ50P), E2P (XJ70P), E3P (XJ90P)

Economical, compact 50, 70 and 90lpm home pressure systems driven by a single stage jet assisted centrifugal pump, with preset pressure switch included.

TANK OPTIONS

Pump Only
XJ50P
XJ70P
XJ90P

WHY CHOOSE THE DAVEY EVERYDAY SERIES (XJ/P) WITH PRESSURE SWITCH?

PUMP

Single stage jet assisted centrifugal with closed vane impeller.

303 stainless steel pump shaft.

Internal suction side check valve fitted.

Mechanical shaft seal.

Oring casing seals.

Pressure switch control with adjustable cut-in and cut-out pressure.

MOTOR

Davey manufactured.

2 pole, 2850rpm, 50Hz.

TEFC with IP55 enclosure.

Class F insulation.

Permanently split capacitor design.

Double contact sealed C3-HTG rated ball bearings.

Protected against both high operating temperatures and high current by a built-in automatically resetting thermal overload.

BENEFITS

- Manufactured from highest quality corrosion resistant materials
- Compact base mounting for quick and easy installation
- Fully adjustable pressure switch allows for installation adjustments
- TEFC motor-corrosion resistant and excludes dust and dirt
- Motor and pump designed for frequent starts
- Every tank and pump unit individually tested to guarantee reliable operation
- Low maintenance
- Easy to service if required

OPERATING LIMITS

Type	E1P (XJ50P)	E2P (XJ70P)	E3P (XJ90P)
Capacities to	50 lpm	70 lpm	90 lpm
Maximum total head	46m	48m	46m
Cut-in pressure (factory setting)	180kPa	210kPa	210kPa
Cut-out pressure (factory setting)	390kPa	420kPa	350kPa
Maximum liquid temperature	50°C		
Maximum ambient temperature	55°C		
Maximum suction lift	7m		
Inlet size (BSP)	1" F	1¼" F	1¼" F
Outlet size (BSP)	1" F	1" F	1" F

MATERIALS OF CONSTRUCTION

PART	MATERIAL
Impellers	Glass filled polycarbonate
Pump casing	Glass filled noryl
Pump shaft sleeve	Brass
Internal check valve	Delrin
Internal check valve spring	Stainless spring steel
Jet and Venturi	Acetal
Inlet & outlet ports	Glass filled noryl
Seal ring (stationary)	Carbon
Seal ring (rotating)	Ceramic
Seal spring	304 stainless steel
Orings	Nitrile rubber


ELECTRICAL DATA

Type	E1P (XJ50P)	E2P (XJ70P)	E3P (XJ90P)
Supply Voltage	220-240V		
Supply frequency	50Hz		
Input power (P ₁)	0.84kW	1.15kW	1.4kW
Output power (P ₂)	0.56kW	0.8kW	1.1kW
Full load current	3.6A	5.1A	6.6A
Locked rotor current	12.0A	18.0A	28.0A
Starting	P.S.C.		
Insulation class	Class F		
IP rating	IP55		

INSTALLATION & PRIMING

- On installations with suction lifts over 1m, a good quality foot valve should be fitted. In this case the in-built check valve must be removed from the suction inlet before installing suction piping.
- The system is primed by filling the pump and suction line with water through the priming port, and replacing priming plug prior to switching on.

HYDRAULIC PERFORMANCE

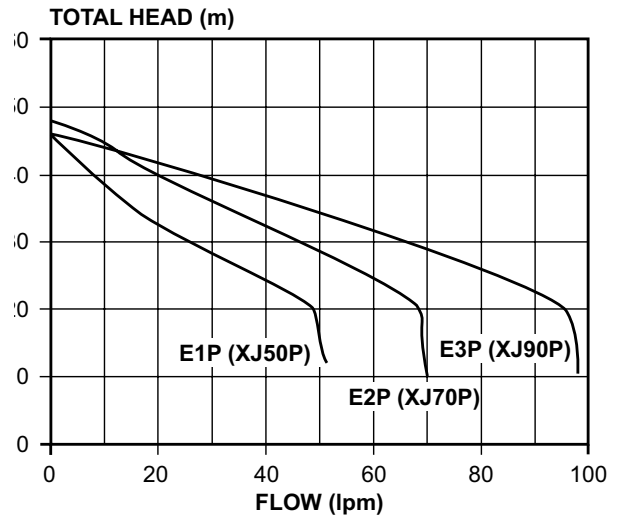

DIMENSIONS (MM)

Type	A	B	C	D	E	F	Inlet BSP	Outlet BSP	Net Weight (kg)
E1P (XJ50P)	430	124	146	102	185	226	1" F	1" F	9.0
E2P (XJ70P)	455	124	146	102	210	226	1¼" F	1" F	11.0
E3P (XJ90P)	505	124	146	102	260	226	1¼" F	1" F	14.0

