




# PoE NVR Quick Start Guide

For more information of your new system, please refer to [www.zositech.com](http://www.zositech.com)

## Contents

EN .....	01
ES .....	10

## 1 What's in the box



NVR



NVR Power Adapter



USB Mouse



3ft(1m) Ethernet Cable




HDMI Cable




Quick Start Guide

NOTE: Products and accessories vary by product models, please refer to the actual product.

## 2 Introduce the NVR

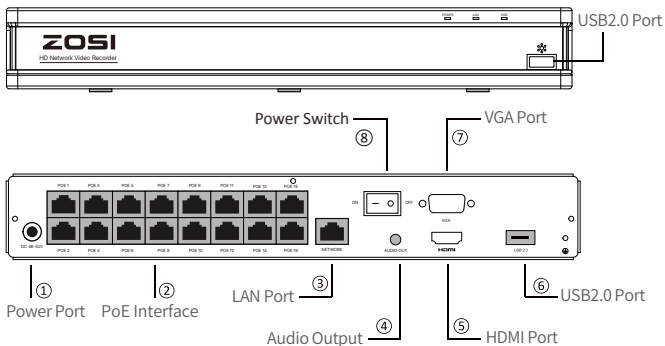

NOTE: The actual appearance and components may vary with different products, please refer to the actual product.

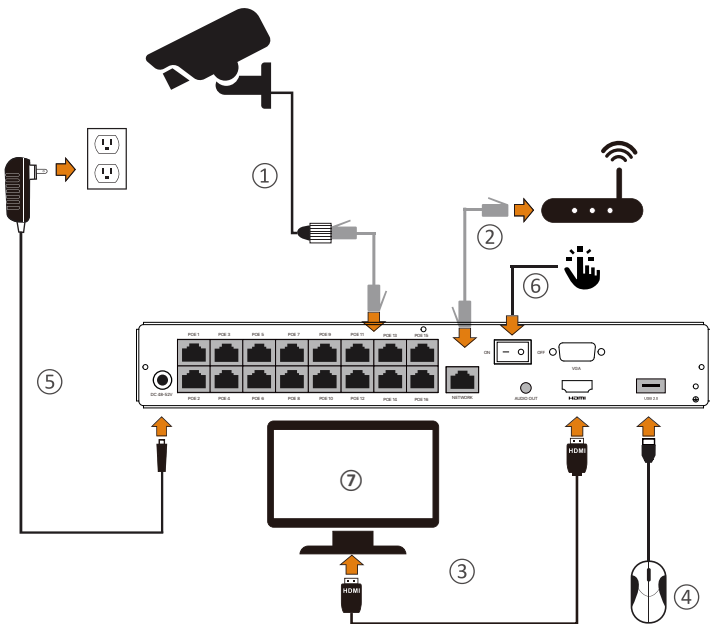

- ① Connect the Cameras to the PoE NVR with 60ft(18.3m) Ethernet Cable.
- ② Connect the PoE NVR to the Router with 3ft(1m) Ethernet Cable.
- ③ Connect the PoE NVR to the Monitor with VGA or HDMI Cable.
- ④ Connect the USB Mouse to the USB2.0 Port.
- ⑤ Connect the PoE NVR to the Power Outlet.
- ⑥ Turn on the power switch and enjoy live view.
- ⑦ The monitor will display live view of the camera.

NOTE: To ensure the device works properly, it is recommended to power on the PoE NVR first for testing before a final installation.



## 3 Access the System via Smartphone or PC

### 3.1. Smartphone

Search “ZOSI Smart” in the APP Store or use a browser to scan the QR code below, download and install the app and follow the instructions to register an account.



Zosi Smart



App (IOS/Android)



App video operation link

### 3.2. PC

Download path: Go to <https://www.zositech.com/pages/app>.

## 4 Set up the NVR System


### 4.1. Mouse Operation:

Left Button:

- Preview or Playback Interface: Double-click a single channel to enter full screen and double-click again to exit full screen.
- Navigation Menu: Left click to select a menu option.





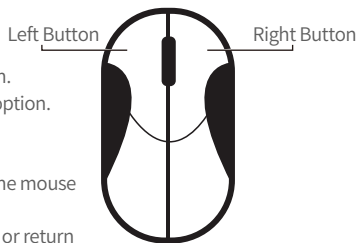







Right Button:

- Right click to bring up the main menu when the mouse is on the preview interface.
- Navigation Menu: Right click to exit the menu or return to previous menu option.




## 4.2. Introduce the Menu Bar:

Right-click anywhere on the screen to open the menu bar.

 Single	• Single - Select single channel for live viewing
 Multi	• Multi - Select multi-channel for live viewing
 Start Scan	• Start Scan - Start/Stop Scan
 Colour	• Colour - Adjust colour and image settings
 E-Zoom	• E-Zoom - E-Zoom the preview interface
 Audio	• Audio - Adjust the camera volume
 Snap	• Snap - Snap and save the live view images
 Stop Record	• Stop Record - Start/stop record
 Playback	• Playback - Search Video playback and quick playback
 Intelligent Alarm	• Intelligent Alarm - Set up Human Detection and Siren-Light Alarm
 IPC Channel Config	• IPC Channel Configuration - IPC channel configuration management
 Main Menu	• Main Menu - Enter the Main Menu


## 4.3. System Password:

The factory default username is “admin” and the password is empty, so the first time users can login the system directly.

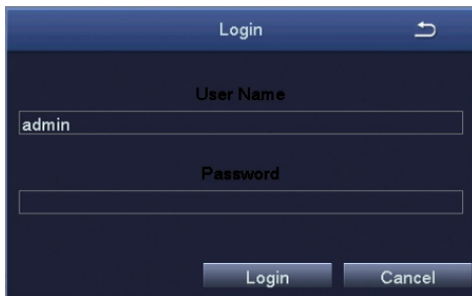


The image shows a 'Login' dialog box with a title bar containing the text 'Login' and a refresh icon. Below the title bar, there are two input fields. The first is labeled 'User Name' and contains the text 'admin'. The second is labeled 'Password' and is currently empty. At the bottom of the dialog, there are two buttons: 'Login' and 'Cancel'.

Change Password Path: Right click the mouse-Main Menu-Setup-Users-Change Password  
NOTE: The new password setting cannot be less than 6 characters, please keep the password properly.

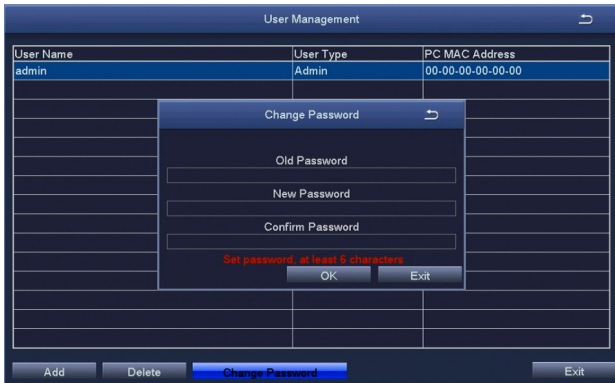

## 5 Date & Time Setting

Right click the mouse - Main Menu - Setup - Basic - Date & Time - Choose the corresponding time according to your region and then click “Apply” to save.  
NOTE: The default time zone is GMT, please choose the corresponding time according to your region

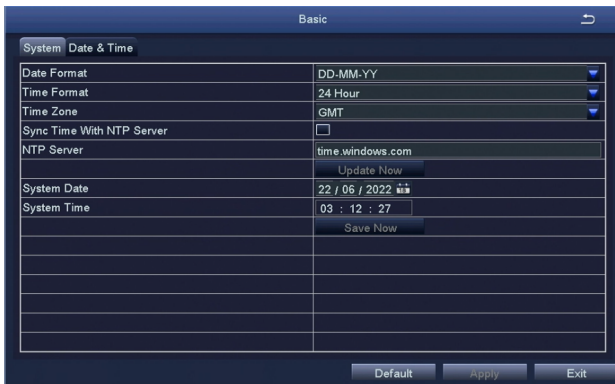


## 6 Video Playback

Right click the mouse - Playback - Video Playback/Quick Playback,  
Video Playback: Playback the video clips via time search or event search.  
Quick Playback: Quick playback of the first 30 minutes of video.

The screenshot displays a video search interface with a dark blue background. At the top, there is a 'Search' button and a search icon. Below this, there are three tabs: 'Time Search', 'Event Search', and 'Image'. The 'Time Search' tab is active, showing a 'Start Time' field with the value '17 : 16 : 48'. Below the time field is a grid with 16 rows and 6 columns. The columns are labeled with times: 00:00, 04:00, 08:00, 12:00, 16:00, and 20:00. The first two columns (00:00-04:00 and 04:00-08:00) are shaded blue. To the right of the grid is a calendar for the month of 11 in 2021. The calendar shows days of the week (Su, Mo, Tu, We, Th, Fr, Sa) and dates from 1 to 30. The date 17 is highlighted in blue. Below the calendar is a grid of checkboxes for each day of the month, with the first 16 days checked.



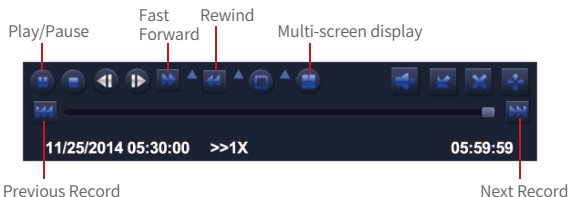

**Previous Video:** Play the previous video.

**Next Video:** Play the next video.


**Fast forward:** You can play the video clips at 1/4 time speed to 16 times speed.

**Rewind:** You can rewind the video clips at 1 time speed, 8 times speed, 16 times speed, and 32 times speed.

**Screen Modes:** Single Channel Playback/Multi-channel Playback. Channels without video playback will show a black screen.

## 7 Backup

- ① Insert a USB into the USB 2.0 port on the PoE NVR.
- ② Right click the mouse > Main Menu > Backup > Select channels and time period > Search > Select the video clips you want to back up > Click “Apply” .

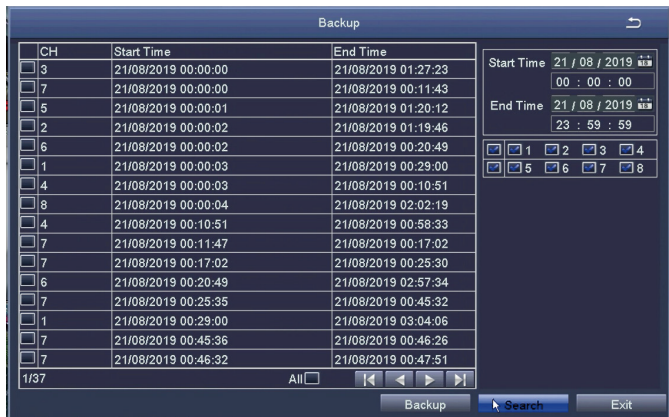

For more information about the system operation settings, please visit: <https://bit.ly/3zQsdlv>.

## 8 Usage Specification

- Use the camera only with compatible ZOSI NVRs.
- Read this guide carefully and keep it for future reference.
- Follow all instructions for safe use of the product and handle with care.
- Use the product within given temperature, humidity, voltage level noted in the device's specifications.
- Do not disassemble the product.
- Use only a regulated power supply with the product (optional). Use of a non-regulated, non-conforming power supply can damage the product and void the warranty.
- Periodic cleaning may be required. Use a damp cloth only. Do not use any harsh, chemical-based cleaners.
- Do not use the product in a sealed, humid environment. It is recommended to place it in a location that is easily ventilated for installation.
- Do not disassemble the device while power is on.

## 9 Notification of Compliance

### **FCC Compliance Statement**

This device complies with Part 15 of FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including inference that may cause undesired operation.

### **Simplified EU Declaration of Conformity**

ZOSI declares that the device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.



### **Correct Disposal of this Product**

This marking indicates that this product cannot be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal and promote the sustainable reuse of material resources, please recycle it responsibly. To return your used device, please visit the Return and Collection System or contact the retailer from whom the product was purchased. They can take this product away for environmentally safe recycling.

## 1 Lista de empaque



NVR



Fuente de alimentación para NVR



Ratón USB



Cable Ethernet de 3ft(1m)




Cable HDMI



Manual


NOTA: Los productos y accesorios varían por diferentes modelos, por favor consulte el producto específico.

## 2 Introducción del NVR

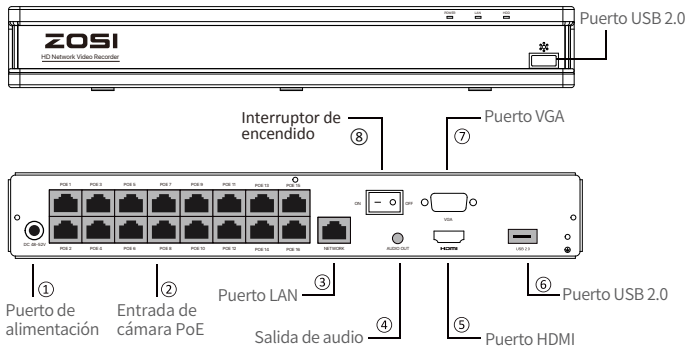

NOTA: La apariencia y los componentes variarán por diferentes productos, por favor consulte el producto específico.



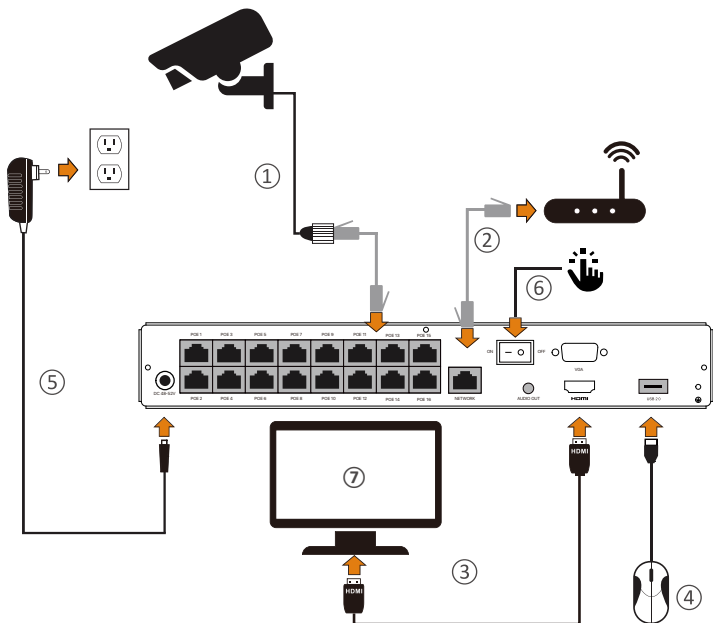

- ① Conecte las cámaras al NVR mediante los cables Ethernet de 60ft(18,3m).
- ② Conecte el NVR al enrutador mediante un cable Ethernet de 3ft(1m).
- ③ Conecte el NVR al monitor mediante un cable VGA o HDMI.
- ④ Conecte el ratón USB al puerto USB2.0.
- ⑤ Conecte el NVR a la toma de corriente.
- ⑥ Encienda el interruptor de encendido y disfrute de la vista en vivo.
- ⑦ El monitor mostrará la imagen de cámara en tiempo real.

NOTA: Para asegurarse de que el dispositivo funcione correctamente, se recomienda que probe el dispositivo antes de la instalación.

## 3 Acceso al sistema a través de Teléfono Móvil o PC

### 3.1. Teléfono Móvil

Busque "Zosi Smart" en la APP Store o escanee el código QR a continuación, descargue e instale la aplicación siguiendo las instrucciones para registrar una cuenta.



Zosi Smart



App (IOS/Android)



Enlace de video de operación de la aplicación

### 3.2. PC

Página web de descarga: <https://www.zositech.com/pages/app>.

## 4 Configuración del sistema NVR


### 4.1. Operación del ratón:

Botón izquierdo:

- Interfaz de vista previa o reproducción: Haga doble clic en único canal para entrar en la pantalla completa y haga doble clic de nuevo para salir de la pantalla completa.
- Menú de navegación: haga clic con el botón izquierdo para seleccionar una opción en el menú.





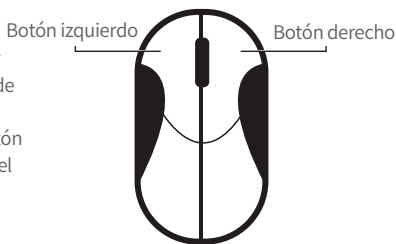







Botón derecho:

- Haga clic con el botón derecho para entrar en el menú principal cuando el ratón esté en la interfaz de vista previa.
- Menú de navegación: haga clic con el botón derecho para salir del menú o volver a la opción anterior.



## 4.2. Introducción del menú:

Haga clic derecho en cualquier lugar de la pantalla para abrir el menú.

 Único	• Único: Seleccione un solo canal para vista en vivo
 Múltiples	• Múltiples: Seleccione múlti-canales para vista en vivo
 Iniciar escaneo	• Iniciar escaneo: Iniciar/Detener escaneo
 Color	• Color: Ajuste la configuración de color e imagen
 E-Zoom	• E-Zoom: Agrande la interfaz de vista previa
 Audio	• Audio: Ajuste el volumen de la cámara
 Foto	• Foto: Capture y guarde imágenes de vista en vivo
 Detener la grabación	• Detener la grabación: Iniciar/Detener las grabaciones
 Reproducir	• Reproducir: Busque reproducción de video y reproducción rápida
 Alarma inteligente	• Alarma inteligente: Configure Detección Humana y Alarma de Sonido&Luz
 Config canal IPC	• Config canal IPC: Gestione la configuración de canal de IPC
 Menú principal	• Menú principal: Entre al Menú principal

## 4.3. Contraseña del sistema:


El nombre de usuario por defecto es "admin" y la contraseña está vacía, así que los usuarios pueden iniciar sesión en el sistema directamente por primera vez.



The screenshot shows a login window titled "Iniciar sesión" with a back arrow icon in the top right corner. It contains two input fields: "Nombre" with the text "admin" and "Contraseña" which is empty. At the bottom, there are two buttons: "Iniciar sesión" and "Cancelar".

Método de cambiar contraseña: haga clic con el botón derecho del ratón - Menú principal - Configuración - Usuarios - Cambiar contraseña.

NOTA: La nueva contraseña no puede ser menos de 6 caracteres, por favor conserve la contraseña correctamente.

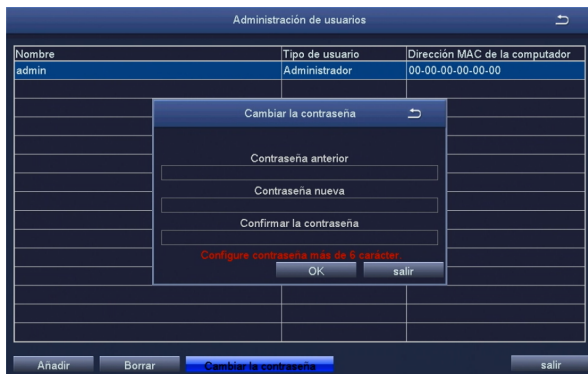

## 5 Configuración de la fecha y hora

Haga clic con el botón derecho del ratón - Menú principal - Configuración - Básico - Fecha y hora - Elija la hora correspondiente según su región y luego haga clic en "Aplicar" para guardar.

NOTA: El horario predeterminado es GMT, elija la hora correspondiente según su región.




## 6 Reproducción de vídeos

Haga clic derecho del ratón - Reproducir - Reproducción de video/Reproducción rápida, Reproducción de video: reproduzca videos a través de la búsqueda de tiempo o la búsqueda de evento.  
Reproducción rápida: reproduzca rápidamente el video de 30 minutos antes.

The screenshot shows a video search interface. At the top, there is a search bar with the word "Buscar" and a magnifying glass icon. Below it, there are three tabs: "Búsqueda por hora", "Búsqueda por evento", and "Imagen". The "Búsqueda por hora" tab is selected. In the center, there is a "Comienzo" (Start) field with a play button icon and a time input field showing "00 : 00 : 00". Below this is a grid with 16 rows and 24 columns. The columns are labeled with times: 00:00, 04:00, 08:00, 12:00, 16:00, and 20:00. The grid contains blue bars representing video segments. To the right of the grid is a calendar for the month of November 2011. The calendar shows the days of the week (Su, Mo, Tu, We, Th, Fr, Sa) and the dates from 1 to 30. Below the calendar is a grid of checkboxes for each day, with some days (1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16) checked.



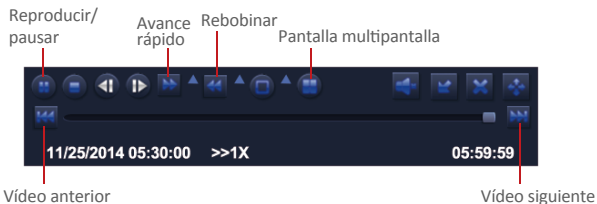

**Anterior video:** reproduzca el video anterior.

**Siguiente video:** reproduzca el siguiente video.

**Avance rápido:** puede reproducir videos a una velocidad de 1/4 a 16 veces.

**Rebobinar:** puede rebobinar videos a una velocidad de 1 vez, 8 veces, 16 veces y 32 veces.

**Modos de pantalla:** Reproducción de Único Canal/Reproducción Múlti-canales. Los canales sin reproducción de video mostrarán una pantalla negra.

## 7 Copia de seguridad

① Inserte un pendrive USB en el puerto USB 2.0 del NVR.

② Haga clic derecho del ratón - Menú principal - Copia de seguridad - Elija el canal y el período de tiempo - Buscar - Elija los videos que desea copiar > Haga clic en "Aplicar".

Copia de seguridad

Canal	Comienzo	Final
<input type="checkbox"/> 1	26/09/2019 00:00:00	26/09/2019 00:09:05
<input type="checkbox"/> 2	26/09/2019 00:00:00	26/09/2019 00:04:32
<input type="checkbox"/> 3	26/09/2019 00:00:00	26/09/2019 00:17:46
<input type="checkbox"/> 4	26/09/2019 00:00:01	26/09/2019 00:01:58
<input type="checkbox"/> 4	26/09/2019 00:01:58	26/09/2019 00:29:08
<input type="checkbox"/> 2	26/09/2019 00:04:32	26/09/2019 00:28:36
<input type="checkbox"/> 1	26/09/2019 00:09:05	26/09/2019 00:31:10
<input type="checkbox"/> 3	26/09/2019 00:17:46	26/09/2019 00:36:40
<input type="checkbox"/> 2	26/09/2019 00:28:36	26/09/2019 00:52:45
<input type="checkbox"/> 4	26/09/2019 00:29:08	26/09/2019 00:56:20
<input type="checkbox"/> 1	26/09/2019 00:31:10	26/09/2019 00:53:14
<input type="checkbox"/> 3	26/09/2019 00:36:40	26/09/2019 00:55:32
<input type="checkbox"/> 2	26/09/2019 00:52:45	26/09/2019 01:16:52
<input type="checkbox"/> 1	26/09/2019 00:53:14	26/09/2019 01:15:19
<input type="checkbox"/> 3	26/09/2019 00:55:32	26/09/2019 01:14:26
<input type="checkbox"/> 4	26/09/2019 00:56:20	26/09/2019 01:23:30

1/16      Todos       << < > >>

Copia de seguri      Buscar      Salida

Comienzo 26 / 09 / 2019 00 : 00 : 00

Final 26 / 09 / 2019 23 : 59 : 59

1  2  3  4

Para obtener más información sobre la configuración del sistema, por favor visite: <https://bit.ly/3zQsdlv>.

## 8 Especificación de uso

- Use cámara con ZOSI NVRs compatibles solamente.
- Lea esta guía detenidamente y consévela para consultarla en el futuro.
- Siga todas las instrucciones para un uso seguro del producto y manéjelo con cuidado.
- Utilice el producto dentro de la temperatura, la humedad y el nivel de voltaje indicados en las especificaciones del dispositivo.
- No desmonte el producto.
- Use una fuente de alimentación regulada con el producto (opcional) solamente. El uso de una fuente de alimentación no regulada y no conforme puede dañar el producto y anular la garantía.
- Es posible que se requiera una limpieza periódica. Utilice únicamente un paño húmedo. No utilice limpiadores agresivos a base de productos químicos.
- No utilice el producto en un entorno húmedo y sellado. Se recomienda colocarlo en un lugar que sea fácilmente ventilado para su instalación.
- No desmonte el dispositivo mientras esté encendido.

## 9 Notificación de Cumplimiento

### **Declaración de Cumplimiento de la FCC**

Este dispositivo cumple con la Parte 15 de las Normas de la FCC.

La operación está sujeta a las siguientes dos condiciones:

- (1) Este dispositivo no puede causar interferencias perjudiciales.
- (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluidas las inferencias que puedan provocar una operación no deseada.

### **Declaración de Conformidad de UE Simplificada**

ZOSI declara que el dispositivo cumple con los requisitos esenciales y otras disposiciones relevantes de la Directiva 2014/53/UE.



### **Eliminación Correcta de este Producto**

Esta marca indica que este producto no se puede desechar con otros residuos domésticos en toda la UE. Para evitar posibles daños al medio ambiente o la salud humana por la eliminación descontrolada de desechos y promover la reutilización sostenible de los recursos materiales, recíclelo de manera responsable. Para devolver su dispositivo usado, visite el Sistema de Devolución y Recolección o comuníquese con el minorista donde compró el producto. Pueden llevarse este producto para un reciclaje seguro para el medio ambiente.



# ZOSI

[www.zositech.com](http://www.zositech.com)  
[service@zositech.com](mailto:service@zositech.com)

Visit [www.zositech.com](http://www.zositech.com) for the latest information and resources:  
Download the Product Guide, watch the operation videos, find relevant troubleshooting and FAQs, or contact us at: [service@zositech.com](mailto:service@zositech.com).



F921014Z3006530