


# Omni 40

## User Manual

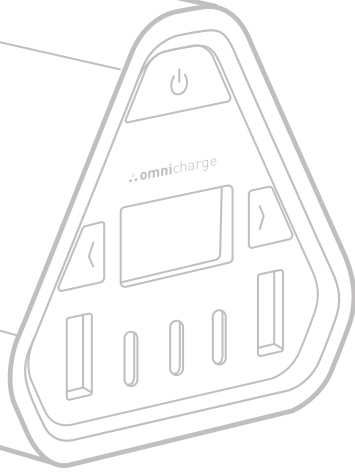

www.omnicharge.co

omnicharge™




### DC PORT MAX OUTPUT 5A - 100W

5V - 25V  
WITH 0.1V ACCURACY

The DC output feature allows you to directly output DC power through the barrel port. To use this feature you will need to know the voltage and amperage of your device and have a compatible cable.

**Warning:** Using the wrong voltage may damage your device.

#### Enabling DC Output

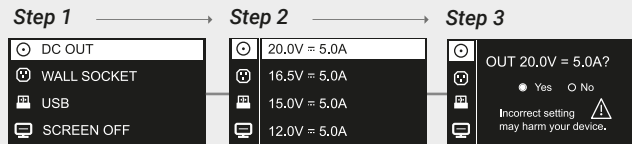


Omnicharge keeps 4 voltage presets. You can press and hold the power button while selecting a preset to customize the voltage and amperage.

**DC** Once active, a DC icon will appear on the screen.

### HOW TO USE HUB MODE USB-C PORT IN/OUT

Use the Omni 40 as a USB hub and transfer files between your smartphones, flash drives, cameras or laptops.

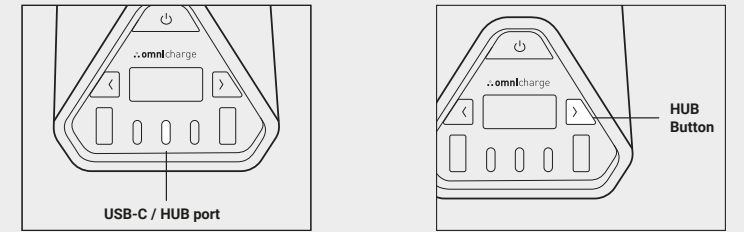


1. Connect the USB-C/HUB port (in the centre) to a USB-C port on your laptop.

2. Initiate HUB mode by short pressing the HUB button (Right button), and a HUB icon will appear on the screen.

**Note:** All the remaining USB-C ports and USB-A ports can be used to transfer files from smartphones, flash drives, cameras or other standard USB-A or USB-C devices.

### POWER YOUR NEXT ADVENTURE



### BEFORE USING THE OMNI 40

#### Calibrate the battery

To ensure a correct battery readout, calibrate the battery when you first receive the product and periodically in the future.


1. Fully discharge the Omnicharge until it cannot be turned on. Press the Power Button and you should see an empty battery icon on the screen.
2. Fully charge your Omnicharge to 100% to finish the calibration. Once you see a fully charged battery icon, you can power the Omnicharge back on.



**Note:** When not in use, the Omnicharge should be stored at full battery and fully charged at least every 6 months to avoid over depletion. Failure to do so can cause the battery to malfunction and is not covered by warranty.

### SCREEN

OLED screen with real time metrics



1. Status Icons
2. Power Input (watts)
3. Battery Power Output (watts)
4. Battery Temperature
5. DC Output Voltage
6. Battery Percentage
7. Time Remaining

### BUTTON FUNCTIONS

#### PRIMARY CONTROLS


- Power Button: Long press to power On, Long press to power Off

- Left Button: On/Off AC Outlet
- Right Button: On/Off HUB

#### MENU CONTROLS

- Power Button: Double press to enter the menu, Quick press to select

- Left Button: Move up
- Right Button: Move down

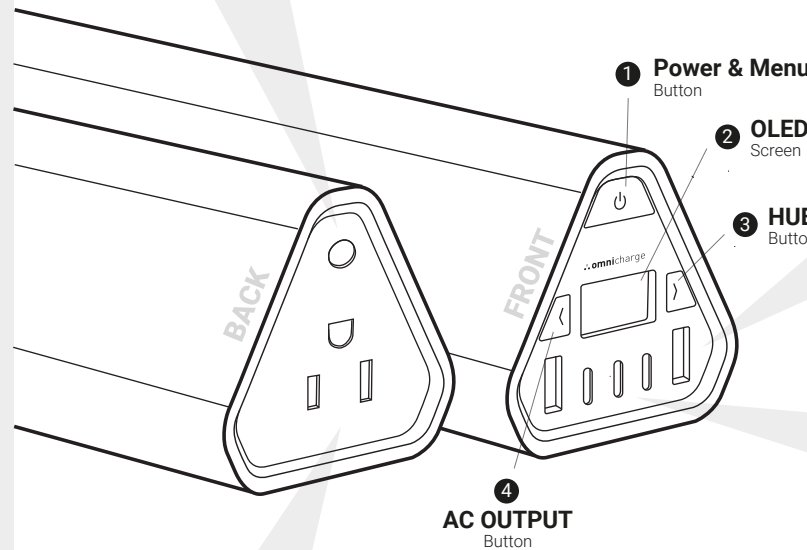

### AC OUTLET MAX OUTPUT 100W



To change the AC output mode, double press the Power Button to enter the menu and select Wall Socket.

1. Choose 120V AC/150V HVDC mode in the menu



**Note:** 150V HVDC is recommended if you are using a switch mode power supply, such as laptop's AC power adapter. Check our support page at [www.omnicharge.co](http://www.omnicharge.co) for more detailed information.

2. When AC/HVDC is active, the following icons should appear on the screen



3. Power any device




+ And so much more



### USB-A PORTS MAX OUTPUT 27W

**USB-A Ports:** Quick Charge QC3.0 compatible, 27W Max

1. Choose whether the USB output is ON or OFF by default.



### USB-C PORTS MAX OUTPUT 150W

**USB-C Main Port (Port 2):** 100W Max

**USB-C Ports 1&3:** 30W Max

The USB-C ports are always on and need no configuration. Simply plug your USB-C device into any USB-C port to start charging.

**Note:** The USB-C and DC port share the same power circuit and cannot be used at the same time.



### RECHARGING YOUR OMNICHARGE

#### 1) FROM THE USB-C PORT

USB-C port max input: 90W





Connect a USB-C wall charger and it will automatically start recharging the Omni 40. If the Omnicharge does not detect incoming power, try to plug in your USB-C charger while the Omnicharge is turned off.

**Note:** The USB-C and DC port share the same power circuit and cannot be used at the same time.

#### 2) FROM THE BARREL PORT

DC Input 5V - 25V, Up to 5A, Max 90W

To charge from the barrel port make sure you have a compatible charger. The Omni 40 uses a common 5.5 x 2.5mm connector and accepts voltages in the 5V-25V range.



### PASS-THROUGH CHARGING

Pass-through charging means that you input power to the Omnicharge while outputting power to your device (passing the power through the Omnicharge). All Omnicharge products support pass-through charging. This means that you can input power through the USB-C or DC port, and output to the AC, USB-A.

# OMNICHARGE ONE-YEAR LIMITED MANUFACTURER'S WARRANTY

Omnicharge warrants that its hardware product shall be free from defects in materials and workmanship for one (1) year beginning from the date of original retail purchase. Omnicharge does not warrant against normal wear and tear, nor damage caused by accident or abuse.

See [www.omnicharge.co/warranty](http://www.omnicharge.co/warranty) for specific warranty information about your product and procedures to act on a warranty claim. Omnicharge's entire liability and your exclusive remedy for any breach of warranty shall be at Omnicharge's option, to repair or replace a functional equivalent of the product. You may be required to furnish proof of purchase details when making a claim under this warranty. Warranty protections are in addition to rights provided under local consumer laws and may vary among countries, states and provinces. See the full warranty information to know your consumer rights and the additional protections provided by this product warranty.

[www.omnicharge.co/warranty](http://www.omnicharge.co/warranty)

## CUSTOMER SUPPORT

All Omnicharge products have gone through quality inspection. If you find your Omnicharge or any Omnicharge accessory is demonstrating any abnormal behavior, immediately stop all product use and contact us at: [support@omnicharge.co](mailto:support@omnicharge.co), or visit our help center at <https://support.omnicharge.co>




## FREQUENTLY ASKED QUESTIONS

- Can I carry my Omni Ultimate+ with me on the plane?**  
This depends on the airline. Many airlines allow up to two batteries between 100Wh - 150Wh with airline approval. In most cases this just means that you need to fill out a form at check-in. If you are unsure, consult with your airline prior to travel.
- Can I charge the Omnicharge while powering my devices?**  
Yes, this is known as pass-through charging. The Omni Ultimate+ can input power from either USB-C or DC port, and can output from all other ports at the same time. The DC and USB-C port share a charging circuit. When pass-through charging, only one USB-C port may be used at a time.
- My Omnicharge is overheating while recharging.**  
Fast charging generates a lot of heat. When recharging immediately after a heavy discharge, you may experience an OT (over temperature) warning. This is normal behavior, the Omnicharge will resume charging once it has reached a functional temperature.
- Can I charge my Omnicharge from a solar panel?**  
Yes, the Omni Ultimate+ can be recharged using most portable solar panels. Make sure your solar panel falls within the specs of the DC barrel port (5v-25v).
- Why is my Omnicharge outputting power when nothing is connected?**  
This is perfectly normal behavior. The passive power draw can vary from 0.2W-1.5W and is required for the onboard circuits and display.
- What is USB PD (Power Delivery)?**  
USB PD is a unified charging standard that uses standardized voltages which allows one universal USB-C charger to power other PD compatible devices like laptops, tablets, or phones.

## JOIN OUR COMMUNITY TODAY

And get one of these accessories:

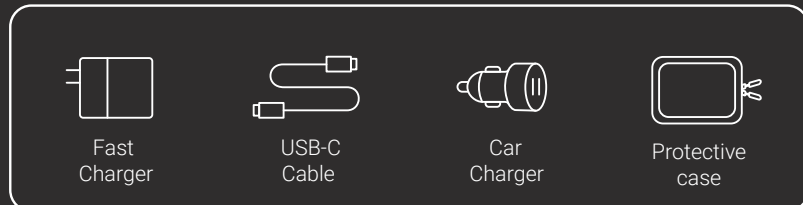

**SCAN QR CODE**  
To register your Omni 40 and claim your free accessory.

Visit <https://www.omnicharge.co/community>

## SCREEN ICONS

- AC OUTPUT**  
AC outlet is activated.
- SOLAR CHARGING**  
Charging from solar power.
- ADJUSTABLE DC OUTPUT**  
Adjustable DC output is activated.
- LOW TEMPERATURE PROTECTION**  
Battery's temperature is too low, the charging circuit is shut off.
- OVERPOWER PROTECTION**  
Device is drawing too much power. Omnicharge will limit or cut off the output power.
- LOW POWER PROTECTION**  
If output is higher than input and the battery is empty. Omnicharge will cut power until a sufficient battery level has been reached.
- USB OUTPUT**  
USB ports are turned on.
- RECHARGING**  
Your Omnicharge is being charged.
- OPTIMAL CHARGING**  
Charging at maximum power.
- OVERHEATING PROTECTION**  
Battery temperature is too high. Omnicharge will limit or cut off its input and output power.
- OVERVOLTAGE PROTECTION**  
Barrel input voltage exceeds the 25V limit. Input charging circuit is shut off.
- HVDC OUTPUT**  
HVDC (high voltage DC) is activated.

## SAFETY AND HANDLING

Read all instructions and cautions carefully before use to avoid personal injury or damage to the unit and any connected products.

- Handling**  
Set up your Omnicharge on a hard, stable work surface which allows for adequate air ventilation around the power bank. The Omnicharge may be damaged if dropped, burned, punctured, crushed, exposed to heat or moisture. Do not use a damaged Omnicharge as it may cause injury.
- High Temperature**  
Do not store the device in high-temperature environments, including heat caused by intense sunlight or other forms of heat. Do not place device in excessively hot environments like cars or near fire.
- Shock or Fire Hazard**  
Omnicharge products with AC output generate the same potentially lethal AC power as a normal household wall outlet. Please use it carefully just like using a normal AC wall outlet. DO NOT insert foreign objects into outputs or ventilation holes.
- DC Output**  
Omnicharge products with DC output operate on a specified voltage. Check your device specifications for the operating voltage before use. Improper use of DC output may harm your device.

- Battery**  
Your Omnicharge is not user serviceable, do not attempt to replace or modify the battery yourself, this may damage the battery which can cause overheating, fire or injury. Improperly replaced batteries may present a risk of leakage, explosion and personal injury. Any manipulation to the unit or its components will void all warranties.
- Recycling**  
The battery in your device should be serviced or recycled by an authorized service provider, and must be recycled or disposed of separately from household waste. Dispose of batteries according to your local environmental laws and guidelines. If no laws or regulations govern, dispose of your Omnicharge in a waste bin for electronics.

### NOTICE

This product is meant for use only in conjunction with appropriate devices. Please consult your device packaging to determine whether this product is compatible with your particular device. The manufacturer is not responsible for any damages to any device incurred through the use of this product. The manufacturer shall not be liable to you or to any third party for any damages you or any third party may suffer as a result of use, intended or unintended, or misuse of this product in conjunction with any device or accessory other than the appropriate device for which this product is designed. The manufacturer shall not be responsible for any damages you or any third party may suffer as a result of misuse of this product as outlined above. You are responsible for product use with an unintended device and any damages resulting from such use. You agree to indemnify the manufacturer for any resulting injuries to any third party(ies).

## MENU NAVIGATION

- DC OUT**  
Turn on DC output. Set the voltage and amperage by long pressing the power button.
- WALL SOCKET**  
Choose whether the AC outlet will output 120V AC or 150V HVDC.
- USB**  
Choose whether your USB-A ports are On/Off at start. The default setting is on.
- SCREEN OFF TIMER**  
Set the screen auto shut-off time. The default setting is 5 min.
- AUTO SHUT DOWN**  
Set the power auto shut-off time. The default setting is 5 min.
- TEMPERATURE**  
Choose whether the temperature is displayed in celcius or fahrenheit.
- BUTTON LIGHT**  
Choose whether the button lights are on or off. The default setting is on.
- TIME REMAINING**  
Choose whether the time remaining is displayed.
- LANGUAGE**  
Choose the screen language.
- FACTORY RESET**  
Reset the Omnicharge to factory settings.
- ABOUT**  
Find the model name, capacity, firmware version, and serial number information here.

## TECHNICAL SPECS

- GENERAL**  
**Weight:** 1.39 lbs (1050 g)  
**Dimensions:** 9.5" x 2.7" x 2.5"(24.3 x 7.1 x 6.5 cm)  
Combined output all ports: 150W
- USB-C**  
Bidirectional Input / Output charging  
**INPUT:** USB-PD 5V 3A, 9V 3A, 12V 3A, 12V 3A, 15V 3A, 20V 5A, 90W Max  
**OUTPUT:** (Main / Port 2)5V 3A, 9V 3A, 12V 3A, 15V 3A, 20V 5A, 100W Max (Port 1 & 3)5V 3A, 9V 3A, 12V 3A, 30W Max
- USB-A OUTPUT**  
**Port1:** (Single) 5V 3A, 9V 2A, 12V 1.5A 18W Max  
**Port2:** (Both) 5V each, total 5V 4.8A
- DC PORT**  
Bidirectional Input/output charging  
**INPUT:** 5~25V, up to 5A, 90W Max  
**OUTPUT:** 5~25V, up to 5A, 100W Max
- AC PORT**  
120V AC, 60Hz, 100W Max US version  
230V AC, 50Hz, 100W Max EU version
- BATTERY CAPACITY**  
12 cells, 142Wh (6400mAh@22.2V)  
38,400mAh
- OPERATING ENVIRONMENT**  
Temperature 0°C-40°C  
Humidity 30-70%  
Altitude ≤ 2000m

**MADE IN CHINA**  
© 2022 Omnicharge.  
Omnicharge is a trademark of Omnicharge Inc.

