

Application

Designed primarily for residential use, these durable electric valves offer solid construction, reliable performance and convenient operation to accommodate the specific needs of homeowners.

Features

- Manual internal bleed
- Manual external bleed (flush mode)
- Heavy-duty, corrosion and UV-resistant PVC, glass filled polypropylene and stainless steel construction
- Double-beaded SANTRO-PRENE® diaphragm provides leak-proof seal
- Buna-N valve seat seal
- Encapsulated solenoid
- Threaded bonnet permits fast and easy servicing
- Full stainless steel metering system
- Available in female BSP or slip (no valve adaptor required) configuration
- Easily serviced without removal from the system

Operating Specifications

- Flow Range: 1–100 L/m.
- Pressure Range: 70–1034 kPa

Electrical Specifications

- Solenoid: 24 VAC
- Inrush volt-amp: 24 VAC–9.6 VA
- Inrush current: 0.4 amp
- Holding volt-amp: 24 VAC - 4.8 VA
- Holding current: 0.2 amp


Accessories

- 9–12 VDC Latching Solenoid (DCL)

Dimensions (L × W × H)			
Code	Length (mm)	Width (mm)	Height (mm)
2400S50H	102	78	136
2400MT	102	78	136
2400MTF	102	78	150



Solid construction, reliable performance, convenient operation.

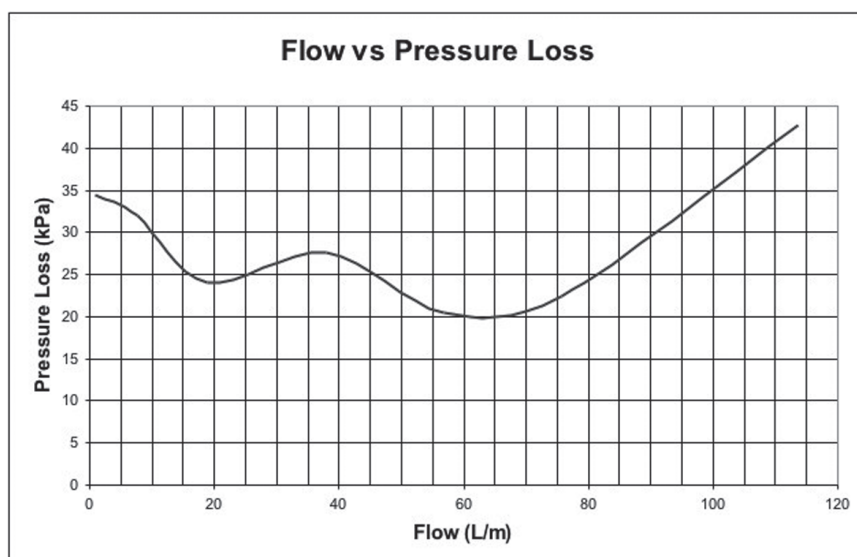

Ordering Information

Code	Description
2400S50H	25 mm Slip Fit Screw Top Solenoid Valve with Manual Bleed
2400MT	25 mm FBSP Screw Top Solenoid Valve with Manual Bleed
2400MTF	25 mm FBSP Screw Top Solenoid Valve with Flow Control