

Plastic Filters

Durable high quality Plastic Filters for wide range of filtration applications



flow rates

**up to 50 m³/h
220 gpm**

filtration degrees

3500-50 micron

diameters

**20-80 mm
¾" - 3"**

max. operating pressure

**10 bar
150 psi**

features:

- Interchangeable filter elements for a wide range of flow rates, with multiple filtration degrees
- Excellent mechanical strength, corrosion/chemical resistant*
- Low pressure loss
- Easy to install and maintain, no tools required for rinsing
- Available with exclusive features for semi-automatic cleaning
- Suitable for a wide range of applications for the irrigation, municipal and industrial markets

* Chemical resistance depends on the type of chemical and the working conditions. For any specific need for chemical resistance, please consult with Amiad.

Amiad Plastic Filters

General

With a variety of filter elements, Amiad's all purpose plastic filters are ideally suited for a wide range of filter applications and are easy to install and maintain. They are constructed from high quality engineered-plastic materials providing excellent mechanical strength, durability and chemical resistance.

No tools are required for dismantling or removing the filter element from the filter housing for rinsing.

Amiad plastic filters can be upgraded to semi-automatic operation by adding one of Amiad's exclusive Brushaway or Scanaway assemblies. These allow the user to manually clean the filter element without dismantling the filter.

Filter Elements

Amiad offers a variety of filter elements and filtration degrees that are suitable for a wide range of flow rates and applications.

Weavewire Screen Elements: (1)

Screen elements are constructed of molded plastic ribs that support a stainless steel weavewire or weaved polyester screen for filtration degrees of 500 to 50 micron.

Perforated Stainless Steel Screen Elements: (2)

Suitable for coarse filtration (straining) between 3,500 and 500 micron.

Disc Elements: (3)

The disc elements are designed for effective removal of organic substances. The elements are constructed using engineered plastic discs that are stacked onto a telescopic core. The discs are grooved on both sides and intersect to form the filtration element when compressed. The effective filtration area is comprised of both the outside surface and the channels formed by the intersecting grooves. Suspended organic particles adhere to the grooved surface adding depth to the filtration process.

Cleaning the disc element is made simple by the unique design of the telescopic core which allows the discs to separate during the cleaning process while maintaining perfect sealing when the element is in the filter housing.



Filtration Degrees Available

The following table lists the various filter elements and filtration degrees available for Amiad's Plastic Filter line. For ease of operation and maintenance, the filter elements are color coded. Please consult with your dealer for assistance in selecting the proper filter element and filtration degree for your application.

Disc color	-	-	Black	Red	Yellow	-	-	-	-	-	-
Screen color	Orange	Black	Yellow	Red	White	Blue	Green	Gray	-	-	-


Micron	50	80	100	130	200	300	500	800	1500	2500	3500
Mesh	300	200	155	120	80	50	30	20	10	6	4
¾", 1"C, , 1" Super, 1½", 1½" Super	▲	▲	■▲	■▲	▲	■▲	▲				
1"T, 1"T Super, 1½"T, 1½"T Super	▲	▲	■▲●	■▲●	▲●	■▲	▲				
2"T, 2"T Super,3"T, 3"TL	▲	▲	▲●	▲●	▲●	▲	▲★	★	★	★	★
3" TDS			▲●	▲●	▲●						

■ Polyester screen ▲ St.St. weaveiree screen ● Disc element ★ Perforated screen

3" TDS




Dimensional Drawing

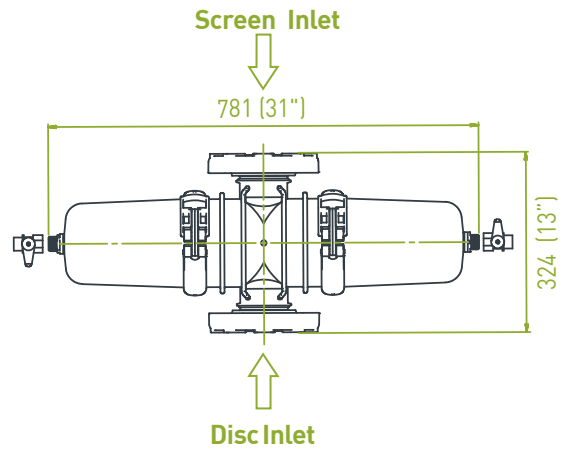


* Threaded connections also available


3" T

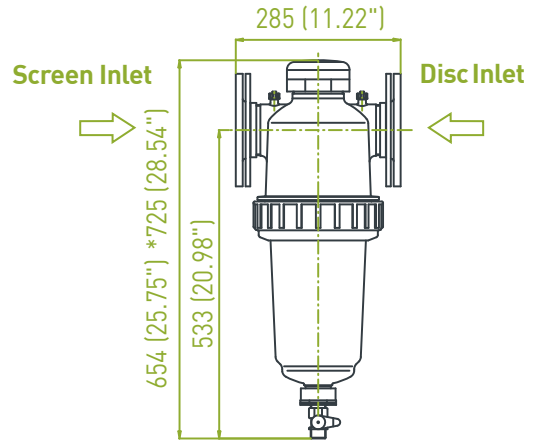

2" T-Super

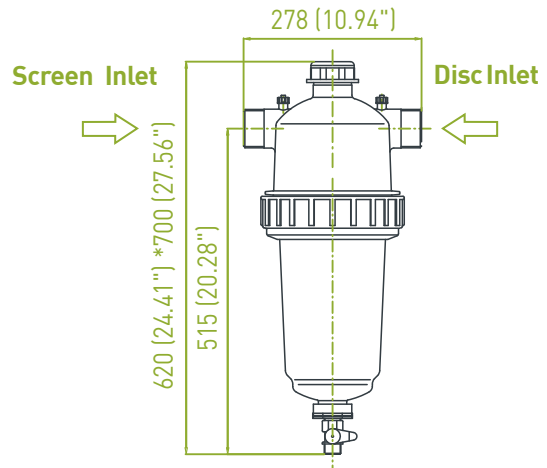

2" T

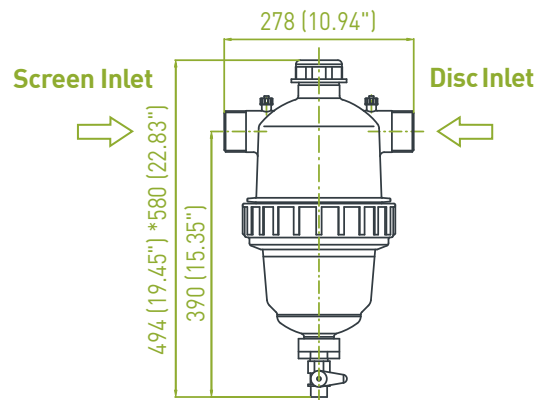


Dim: mm (inch)


*Approx. length required for maintenance

3" TDS



Typical Installation Drawing

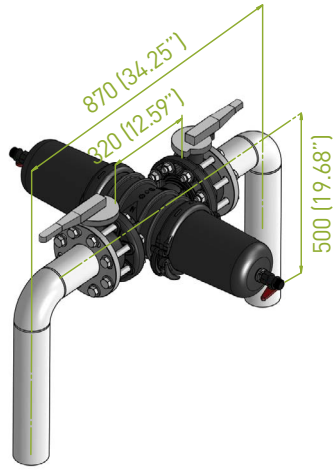



Pressure Loss Graph in clean water

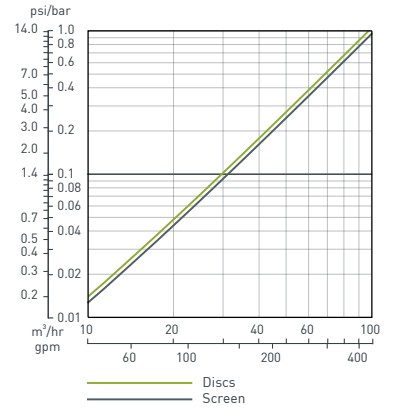



3" T

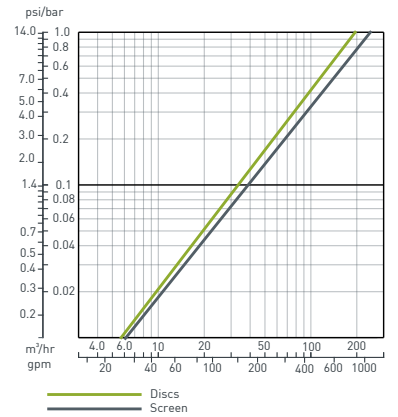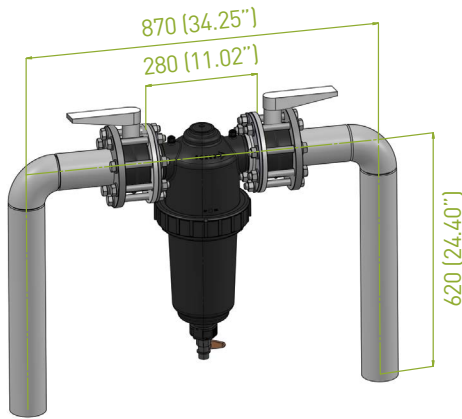

2" T-Super

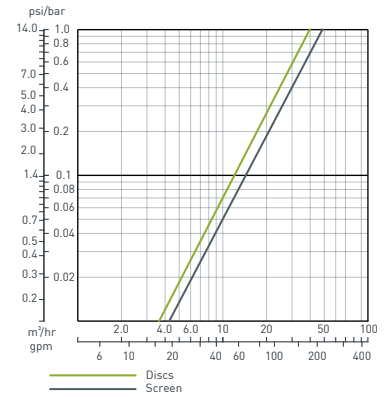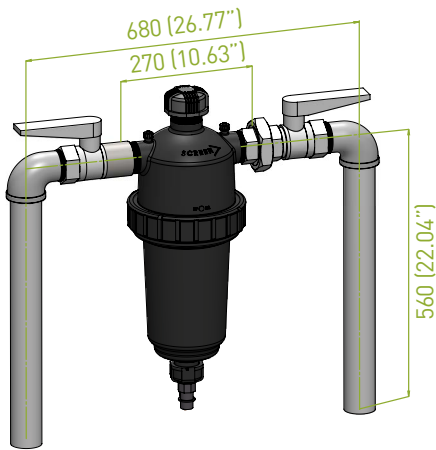

2" T

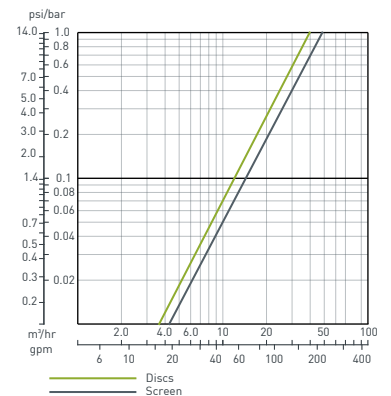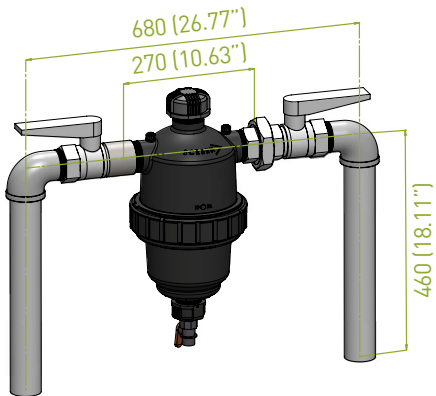


Dim: mm (inch)


1½" Super




Dimensional Drawing

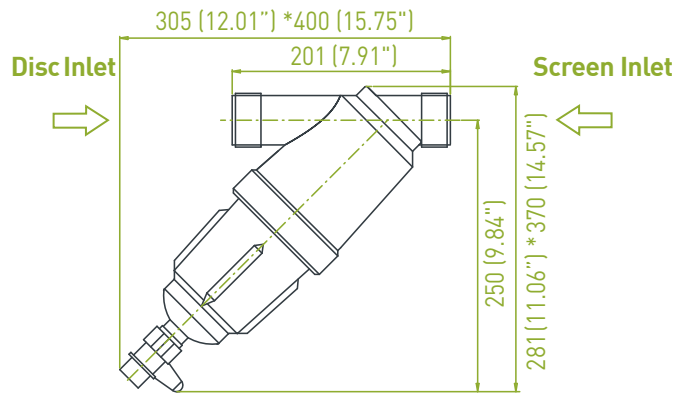


1½" T-Super

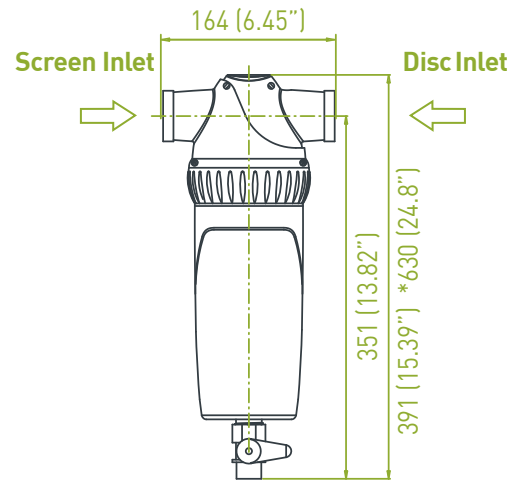

1½" T

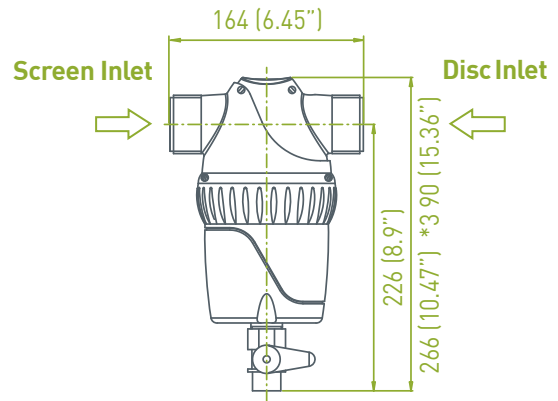


1½" Compact

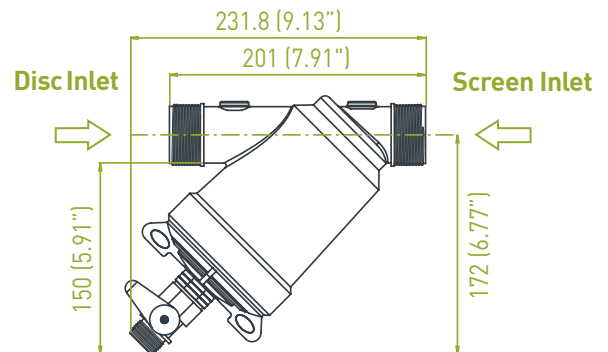


Dim: mm (inch)
*Approx. length required for maintenance

1½" Super



Typical Installation Drawing

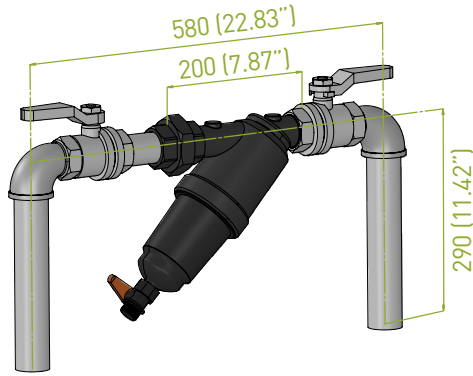



Pressure Loss Graph in clean water

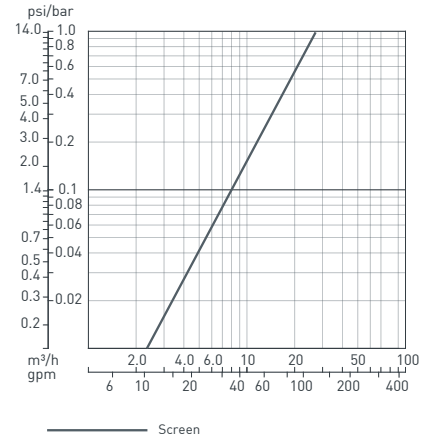



1½" T-Super

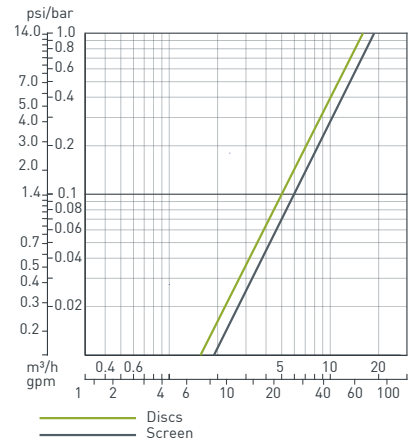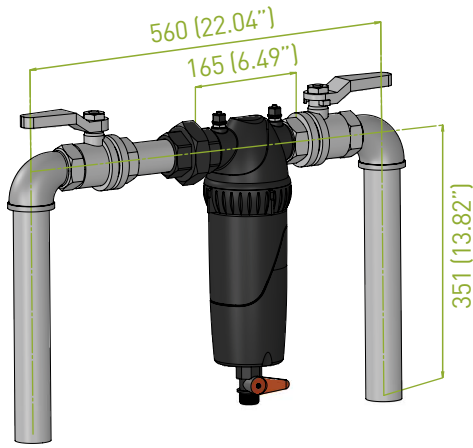

1½" T

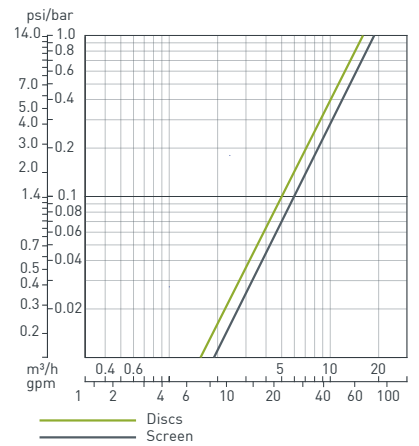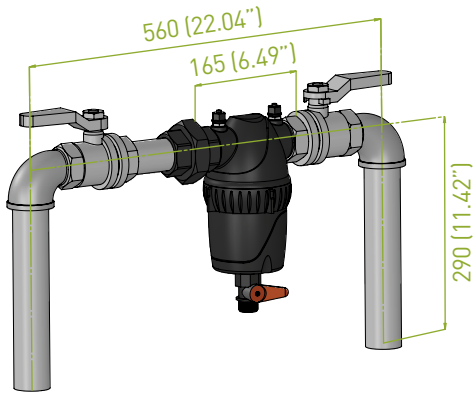

1½" Compact

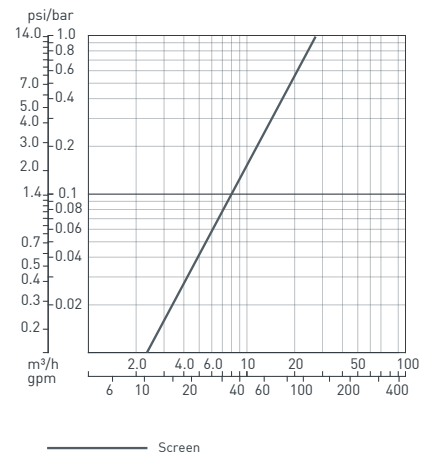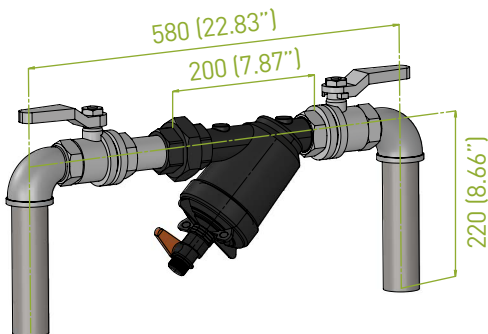


Dim: mm (inch)


1" T-Super




Dimensional Drawing

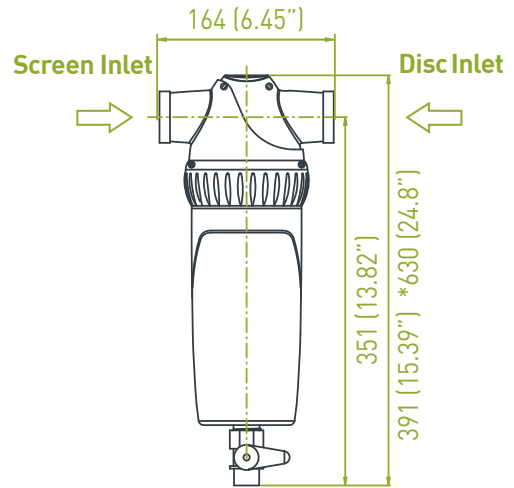


1" Super

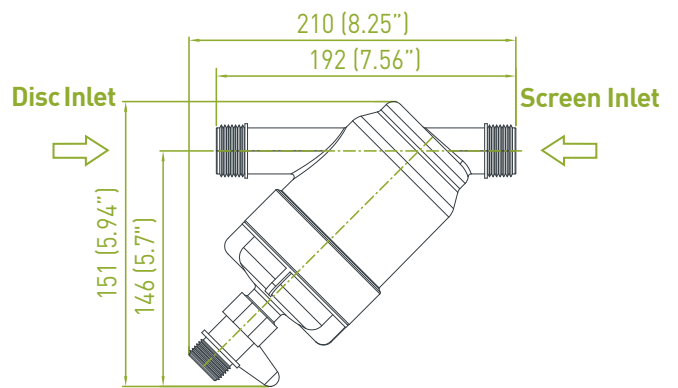


1" T

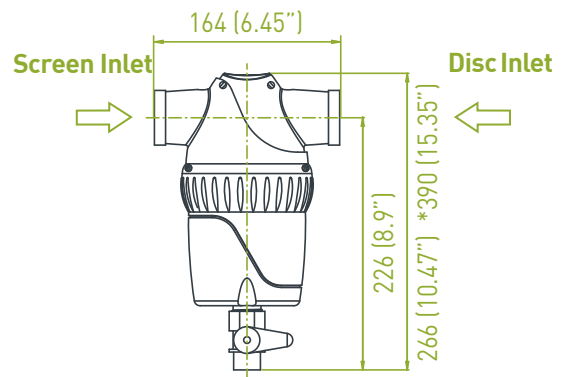

1" Compact

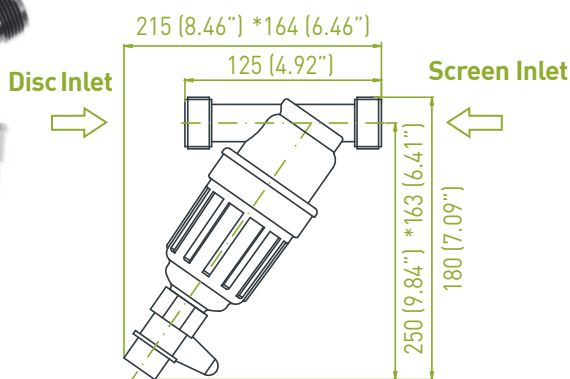

3/4"

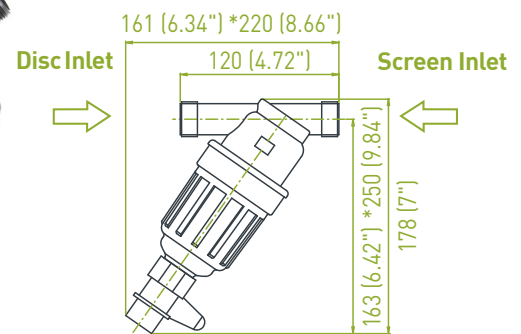


Dim: mm (inch)


*Approx. length required for maintenance

1" T-Super



Typical Installation Drawing

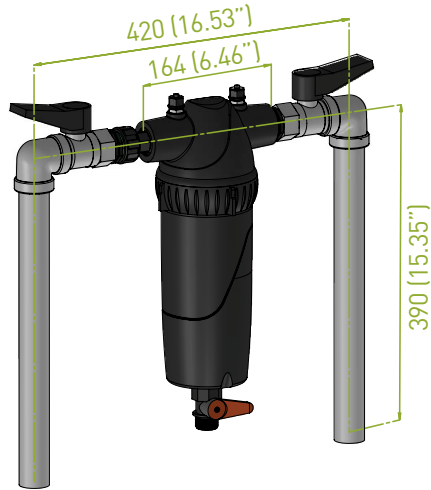



Pressure Loss Graph in clean water

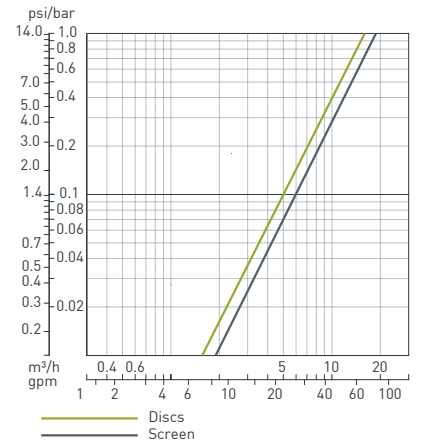



1" Super

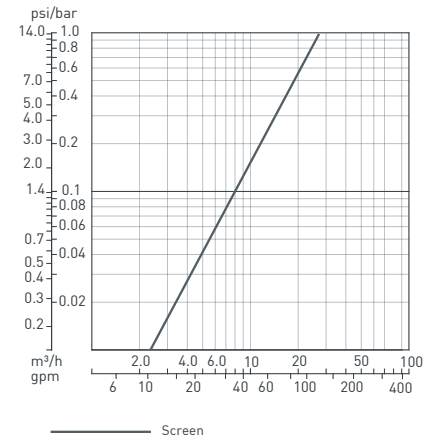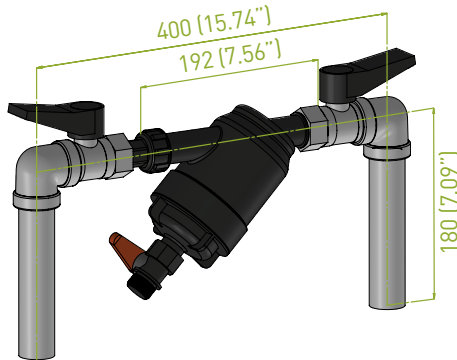

1" T

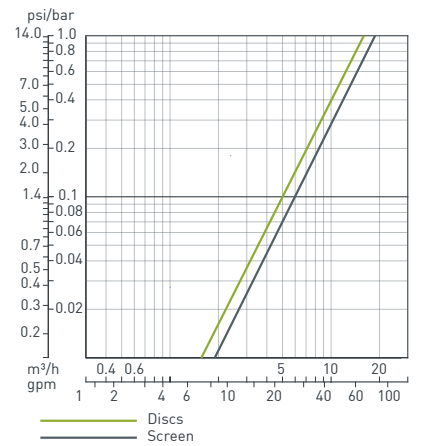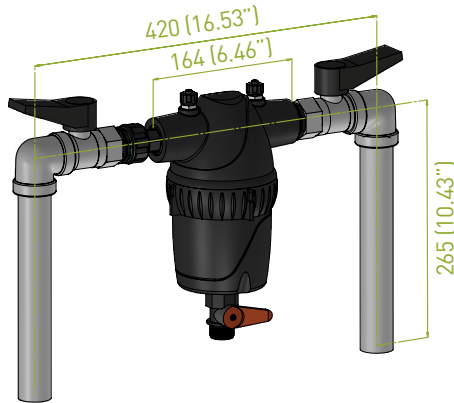

1" Compact / 3/4"

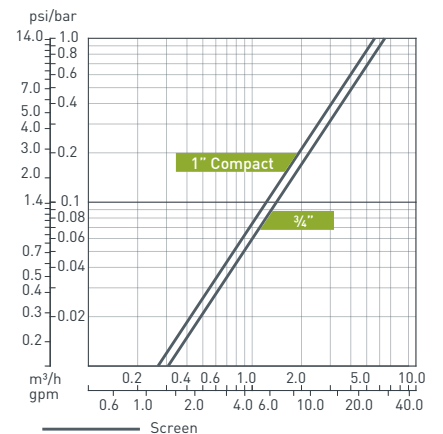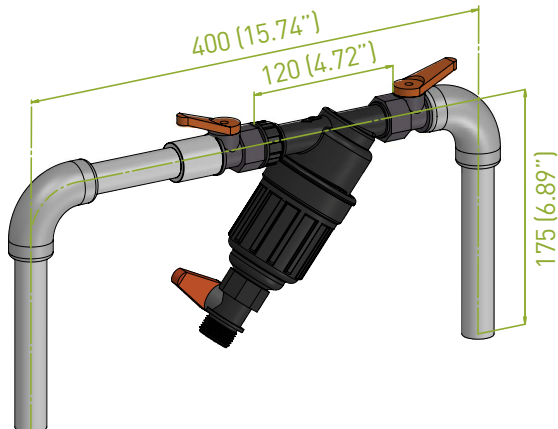

Dim: mm (inch)

Technical Specifications

Filter Type		3" TDS	3" T / 3"TL	2" T-Super	2" T
General Data					
Maximum flow rate*		50 m ³ /h (220 gpm)	60 m ³ /h (264 gpm)	35 m ³ /h (154 gpm)	30 m ³ /h (132 gpm)
Inlet/outlet diameter		80 mm (3")		50 mm (2")	
Standard filtration degrees	Screen	200, 130, 100 micron	3500, 2500, 1500, 800, 500, 300, 200, 130, 100, 80, 50 micron		
	Disc	200, 130, 100 micron			
Max. operating pressure		8 bar (120 psi)	10 bar (150 psi)		
Max. operating temperature		60°C (140°F)			
Weight [empty]	Screen	5.1 kg (11.2 lbs)	4.2 kg (9.2 lbs)		3.6 kg (7.9 lbs)
	Disc	6.3 kg (14.0 lbs)	5.4 kg (11.9 lbs)		4.4 kg (9.7 lbs)

* Consult Amiad for optimum flow depending on filtration degree and water quality.

Filter Type T		1½" T-Super	1½" T	1" T-Super	1" T
General Data					
Maximum flow rate*		15 m ³ /h (66 gpm)		7 m ³ /h (31 gpm)	
Inlet/outlet diameter		40 mm (1½")		25 mm (1")	
Standard filtration degrees		500, 300, 200, 130, 100, 80, 50 micron			
Max. operating pressure		10 bar (150 psi)			
Working temperature range		60°C (140°F)			
Weight [empty]	Screen	1.35 kg (2.7 lbs)	0.85 kg (1.9 lbs)	1.2 kg (2.7 lbs)	0.96 kg (2.1 lbs)
	Disc	1.53 kg (3.2 lbs)	0.96 kg (2.1 lbs)	0.9 kg (2 lbs)	1.06 kg (2.3 lbs)

* Consult amiad for optimum flow depending on filtration degree and water quality.

Filter Type T		1½" Super	1½" Compact	1" Super	1" Compact	¾"
General Data						
Maximum flow rate*		15 m ³ /h (66 gpm)		7 m ³ /h (31 gpm)	6 m ³ /h (26 gpm)	4 m ³ /h (18 gpm)
Inlet/outlet diameter		40 mm (1½")		25 mm (1")		20 mm (¾")
Standard filtration degrees		500, 300, 200, 130, 100, 80, 50 micron				
Max. operating pressure		10 bar (150 psi)				
Working temperature range		60°C (140°F)				
Weight [empty]		1.0 kg (2.2 lbs)	0.76 kg (1.7 lbs)	0.55 kg (1.2 lbs)	0.30 kg (0.7 lbs)	0.28 kg (0.6 lbs)

* Consult amiad for optimum flow depending on filtration degree and water quality.

Engineering Data

Filter Type	3" TDS	3" T	2" T-Super	2" T
Filter Element Data				
Filtration area	Screen: 1,570 cm ² (243 in ²) Disc: 1,900 cm ² (294 in ²)	1,200 cm ² (186 in ²)		800 cm ² (124 in ²)
Filter element type	Weavewire st.st. screen, disc element	Weavewire st.st. screen, perforated st.st. screen, disc element		
Construction Materials				
Filter housing	Polypropylene	Reinforced polyamide		
Filter lid	Polypropylene	Reinforced polyamide		
Tightening nut	N/A	Reinforced polyamide		
Clamp	Reinforced polyamide	N/A		
Housing seal	EPDM	NBR		
Screen	Construction = polypropylene and st. st. 316 Seals = NBR			
Disc	Polypropylene	Construction = polypropylene Grooved discs = polypropylene seals = NBR		

* Amiad offers a variety of construction materials. Consult us for specifications.

Filter Type T	1½" T-Super	1½" T	1" T-Super	1" T
Filter Element Data				
Filtration area	460 cm ² (71 in ²)		200 cm ² (31 in ²)	
Filter element type	Polyester screen, weavewire st.st. screen, disc element			
Construction Materials				
Filter housing	Reinforced polypropylene			
Filter lid	Reinforced polypropylene			
Housing seal	NBR			
Screen	Structure = polypropylene, Screen = st. st. or polyester, Seals = NBR			
Disc	Construction = polypropylene grooved, Discs = polyethylene, Seals = NBR			

* Amiad offers a variety of construction materials. Consult us for specifications.

Filter Type	1½" Super	1½" Compact	1" Super	1" Compact	¾"
Filter Element Data					
Filtration area	460 cm ² (71 in ²)	200 cm ² (31 in ²)		140 cm ² (22 in ²)	
Filter element type	Polyester screen, weavewire st.st. screen				
Construction Materials					
Filter housing	Reinforced polypropylene	POM	Reinforced polypropylene	POM	
Filter lid	Reinforced polypropylene	POM	Reinforced polypropylene	POM	
Housing seal	NBR				
Screen	Structure = polypropylene, Screen = st. st. or polyester, Seals = NBR				

* Amiad offers a variety of construction materials. Consult us for specifications.

Headquarters

Amiad Water Systems Ltd.
Web: www.amiad.com | E-mail: info@amiad.com

The Americas



USA
Amiad USA Inc.
Web: www.amiadusa.com | E-mail: infousa@amiad.com

Mexico
Amiad México SA DE CV,
Web: www.amiad.es | E-mail: infomexico@amiad.com
Irrigation office: E-mail: infomexico-irr@amiad.com

Asia



India
Amiad Filtration India Pvt Limited
Web: www.amiadindia.com | E-mail: info-india@amiad.com

China
Amiad China (Yixing Taixing Environtec Co., Ltd.)
Web: www.amiad.com.cn | E-mail: infochina@amiad.com

South-East Asia
Filtration & Control Systems Pte. Ltd.
E-mail: info-singapore@amiad.com

Australia



Amiad Australia Pty Ltd.
Web: www.amiad.com.au | E-mail: sales@amiad.com

Europe



Amiad Water Systems Europe SAS
E-mail: industry-europe@amiad.com

German branch office
E-mail: industry-de@amiad.com

United Kingdom
Amiad Water Systems UK Limited
E-mail: info-uk@amiad.com



www.amiad.com

910101-000386/05.2021

Copyright © 2019 Amiad Water Systems Ltd. All rights reserved. The contents of this catalogue including without limitation all information and materials, images, illustrations, designs, icons, photographs, graphical presentations, designs, literary works, data, drawings, slogans, phrases, names, trademarks, titles and any other such materials that appear in this catalogue (collectively, the "Contents") are the sole property of Amiad Water Systems Ltd. ("Amiad"). Amiad has sole and exclusive right, title and interest in the Contents, including any intellectual property rights, whether registered or not, and all know-how contained or embodied therein. You may not reproduce, publish, transmit, distribute, display, modify, create derivative works from, sell or participate in any sale of, or exploit in any way, in whole or in part, any of the Contents or the catalogue. Any use of the catalogue or the Contents, other than for personal use, requires the advanced written permission of Amiad.