

1

9,000LTR SQUAT POLY WATER STORAGE TANK

4

3

INSTALLATION:

2

TANKS ARE TO BE INSTALLED ON A WELL COMPACTED, LEVELLED EARTH PAD, FREE FROM SHARP OR LOCALISED HARD STONES/OBJECTS THAT COULD DAMAGE THE TANK BASE. THE ROOF OF THIS TANK IS INTENDED ONLY TO COVER AND IS NOT TO BE TRAFFICABLE ROOF. 90mm

OVERFLOW

MATERIAL:

LLDPE MATERIAL DESIGNED SPECIFICALLY FOR ROTATIONAL MOULDING APPLICATIONS DELIVERING A HIGH ESCR, CHEMICAL RESISTANCE, STIFFNESS AND TOUGHNESS WHICH IS UV STABILISED TO PROVIDE PROLONGED OUTDOOR PROTECTION IN HARSH AUSTRALIAN CONDITIONS.


STANDARDS:

ALL TANKS BY COERCO ARE MANUFACTURED IN GUIDANCE WITH AUST STANDARD AS4766 AND ARE STRUCTURALLY ENGINEERED TO CONFORM TO CYCLONIC AREAS AND STRESS ANALYSIS TESTING REQUIREMENTS.

DIMENSIONS:

DIMENSIONS MAY VARY SLIGHTLY DUE TO THE SHRINKAGE NATURE OF POLYETHYLENE.

NOTE: THIS DRAWING DETAILS COERCO'S STANDARD WATER TANK FITOUT

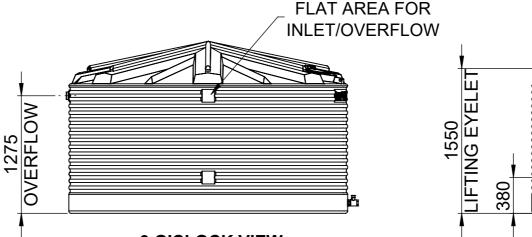

3 O'CLOCK VIEW

coerco		DATE 19/02/2019		MATERIAL LO		V DENSITY POLYETHYLEN		N S				
		PRODUCT 9,000LTR SQUAT	SURFACE FINISH POLISHED				0	$ \rightarrow $				
		PRODUCT CODE RT9000S		WALL THICKNESS				GT	19/02/2019	ORIGINAL CAD		
		DRAWING No C-RT9000S-001		SCALE NOT TO SCALE			− ۲ ۲	REV	BY	DATE	DESCRIPTION	
		C THIS DRAWIN	G IS THE COPYRIGHT	OF COER	CO. IT C	CANNOT BE C	OPIED IN PAR	T OI	R FU	LL Ŵ	ITHOUT TH	E WRITTEN P
1	2		2		Λ						F	

