

Filtered Grey Water


ProSub C6/C9

Used for screened grey water applications, like domestic washing machine water. The float switch is integrated into the pump body allowing it to operate in small tanks or pits. Switching from automatic to manual is as simple as flipping a switch allowing water to be removed down to a depth of 3mm.

Normal operation switch on at 115mm and off at 50mm.



MODEL	^(A) PROSUB C6	^(B) PROSUB C9
Power Absorbed (w) P2	170	250
Max Head (m)	6.5	9
Max Flow Rate (l/min)	125	195
Max Solids Handling (mm)	5	5
Outlet Size	1¼"	1¼"
Pump Diameter (mm)	215	215
Height (mm)	320	320
Cable Length (m)	10	10
Weight (kg)	4	5

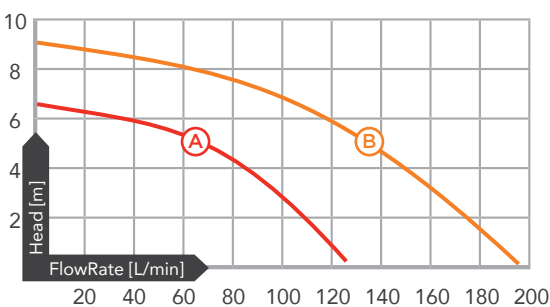

Pond Circulation

SubPond

An ideal pump for running waterfalls or ornamental fountains. Designed for continuous operation in either vertical or horizontal positions.



MODEL	^(A) SUBPOND 300	^(B) SUBPOND 700
Power Absorbed (w) P2	200	550
Max Head (m)	7	10
Max Flow Rate (l/min)	140	240
Outlet Size	1¼"	1¼"
Cable Length (m)	8	8
Weight (kg)	5	6

