


BlueDiver C20



- Carbon-ceramic seal
- Three lip seals
- Highly efficient
- Easy installation
- Cost effective



Model	BlueDiver C20
Power Absorbed (w)	600
Max Head (m)	24
Max Flow Rate (l/min)	68
Outlet Size	1"
Pump Diameter (mm)	149
Pump Height (mm)	350
Weight (kg)	7

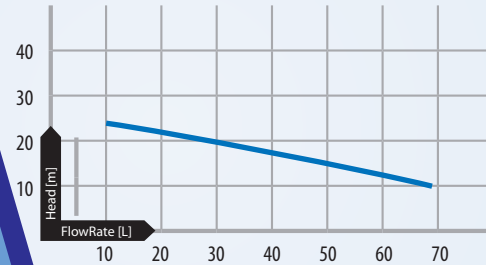

Submersible Pressure Pump BLUEDIVER

- > Compact
- > Auto on/off Float Switch
- > Overheating Protection
- > Stainless Steel Filter
- 🇮🇹 Designed in Italy

3
YEAR
WARRANTY



Adjustable Float



Stainless Steel Filter



Float



Model	BLUEDIVER C30	BLUEDIVER C40	
Electrical data	P1 Power consumption [W]	900	1.100
	P2 Pump consumption [W]	650	750
	Voltage [V]	1 ~ 220-240 AC	1 ~ 220-240 AC
	Frequency [Hz]	50	50
	Current [A]	3.8	4.8
	Capacitor μ F	12.5	12.5
	Capacitor Vc	450	450
	Rated speed [1/min]	2.850	2.850
Hydraulic data	Flow rate max. [l/min]	95	95
	Max. Pressure [Bar]	3.6	4.6
	Max. Head [m]	36	46
	Max. working pressure [bar]	6	6
	Max depth of immersion [m]	12	12
Range of use/materials	Length of Power Cable [m]	15	15
	Cable	H07 RNF	H07 RNF
	Pump International protection	IPX8	IPX8
	Insulation Class	F	F
	Liquid range Temperature [°C]	0 °C / +35 °C	0 °C / +35 °C
	Dimension of particles [mm]	clean water	clean water
	Max. Ambient Temperature [°C]	+40 °C	+40 °C
Dimensions / weight	L x W x H [mm]	150 x 150 x 400	150 x 150 x 400
	DNM GAS	1" F	1" F
	Box Dimensions l x w x h [cm]	23 x 19 x 46	23 x 19 x 46
	Net/Gross Weight [kg]	8.7/10	9/10.2
	Quantity for pallet [no.]	40	40

