

Putting Water Where it Counts!®



Ref: eZyvalve4_METRIC 300522

Antelco Australia
Antelco Pty Ltd ABN 50 008 062 708
Sales & Marketing, Orders & Warehouse
Research & Development
PO Box 95, 131 Tolley Rd,
St Agnes SA 5097 Australia
+61 8 8334 4333
adelaide@antelco.com.au

Antelco USA
Antelco Corporation
Sales & Marketing, Orders & Warehouse
886 Waterway Pl,
Longwood,
Florida 32750 USA
+1 407 331 0699
info@antelco.com

Antelco Europe
Antelco UK Limited
Sales & Marketing, Orders & Warehouse
17a Chartmoor Rd,
Leighton Buzzard,
Bedfordshire LU7 4WG UK
+44 152 585 9990
orders@antelco.co.uk

eZyvalve™ 4

ALL IN ONE VALVE BOX WITH 4 VALVES

Made in Australia

www.antelco.com



The eZyvalve™4 is a compact valve box with 4 internal solenoid valves designed to provide a trouble-free way to distribute water to a micro irrigation system. The 24Vac model requires connection to a 24Vac irrigation controller.

The eZyvalve™4 comes pre-assembled with no internal pipe connections for fast and easy DIY installation and is made from high strength UV stabilised materials.

Features

- ☑ Simplifies the installation of an automatic watering system
- ☑ Controls up to 4 watering zones
- ☑ Ideal for drippers, sprays & micro sprinklers
- ☑ Water, dust and pest resistant
- ☑ Textured non-slip lid with o-ring seal and stainless steel screws
- ☑ 3/4" threaded inlet and outlet connections
- ☑ Easy to connect to existing garden taps using Braided Hose accessory

Applications

Landscape, home gardens, greenhouses and nurseries. Above and below ground installation.



Accessory Product



Braided Hose
Code: 90603

Ordering Information

Description	Order Code
eZyvalve™4 - 24Vac Solenoids 3/4"	16605



Operating Specifications - 24Vac	
FLOW RANGE	1 lpm -30 lpm
PRESSURE RANGE	20 kPa - 1250 kPa
AMBIENT TEMPERATURE	2° C - 60° C
ELECTRICAL	24Vac, inrush current 320 mA, holding current 260 mA at 50 Hz



The eZyvalve™4 is a compact valve box with 4 internal solenoid valves designed to provide a trouble-free way to distribute water to a micro irrigation system. The 9Vdc model requires connection to a 4 station battery powered DC irrigation controller.

For non-potable water supply, a filtration device is recommended. Contact your local irrigation contractor / supplier for further advice.

When designing your irrigation system, refer to your local building codes for plumbing and electrical requirements.

Features

- ☑ For use with 9Vdc battery controllers
- ☑ Controls up to 4 watering zones
- ☑ Ideal for drippers, sprays & micro sprinklers
- ☑ Up to 750 kPa (110 psi) inlet pressure
- ☑ Up to 30 L/min (8 US g/min) per valve
- ☑ 3/4" threaded inlet and outlet connections
- ☑ Connect to a water supply valve or garden tap

Applications

Landscape, home gardens, greenhouses and nurseries. Above and below ground installation.




Performance Chart

Flow Rate (lpm)	Pressure Loss (kPa)
10	30
15	63
20	108
25	165
30	231

Ordering Information

Description	Order Code
eZyvalve™4 - 9Vdc Latching Solenoids 3/4"	16625

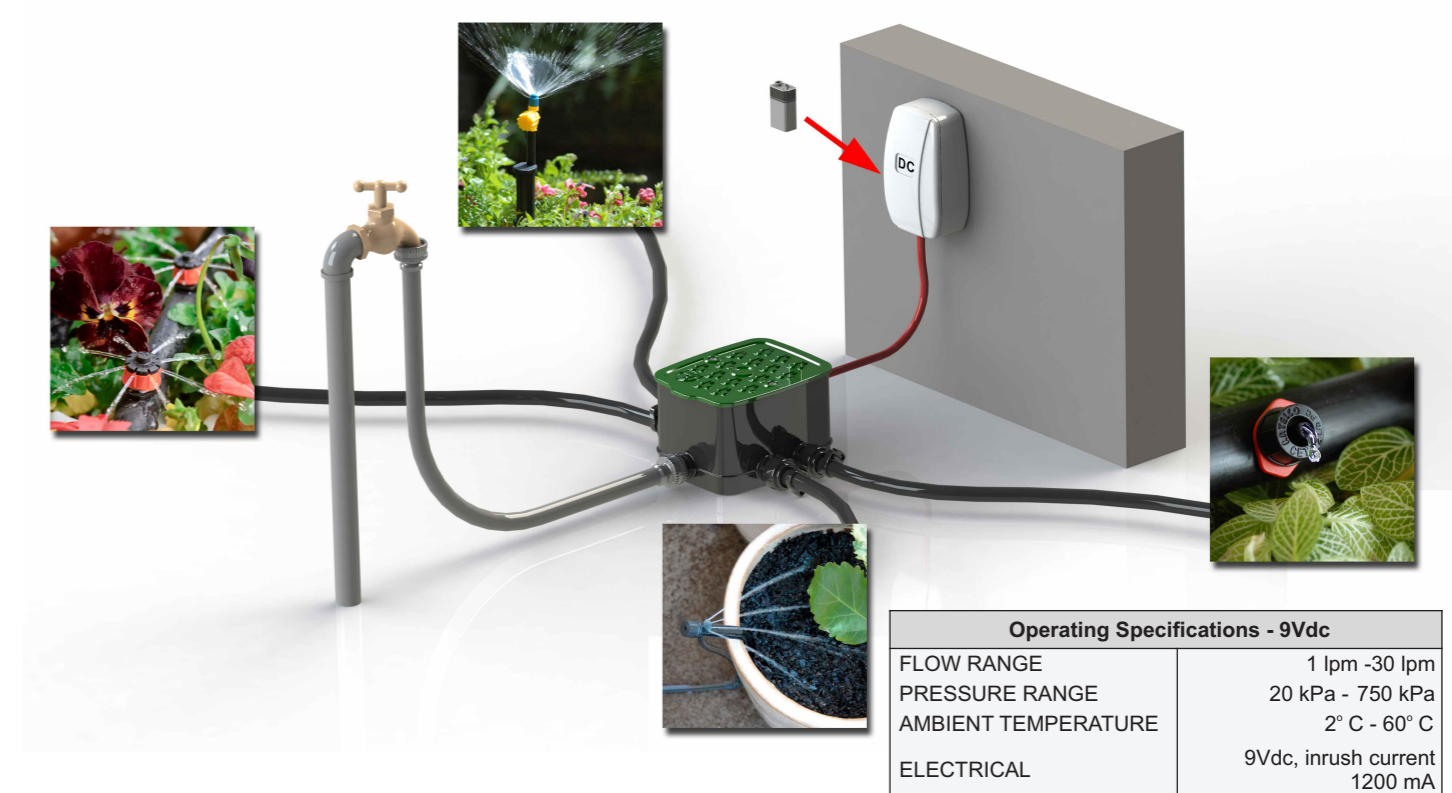

Operating Specifications - 9Vdc	
FLOW RANGE	1 lpm -30 lpm
PRESSURE RANGE	20 kPa - 750 kPa
AMBIENT TEMPERATURE	2° C - 60° C
ELECTRICAL	9Vdc, inrush current 1200 mA