
## **LARGE FORMAT PRINTER** SURECOLOR™ SC-S40670/S60670





The new Epson SureColor™ S-Series printers are Epson's next generation of high-performance eco-solvent signage printers, which incorporates the latest printing technologies to be Epson's most advanced signage printers to date. The printers come with the new sophisticated precision media feeding system, high-performance PrecisionCore™ TFP printheads and a myriad of advanced features that enable them to reliably meet most demanding jobs while minimising operation costs.



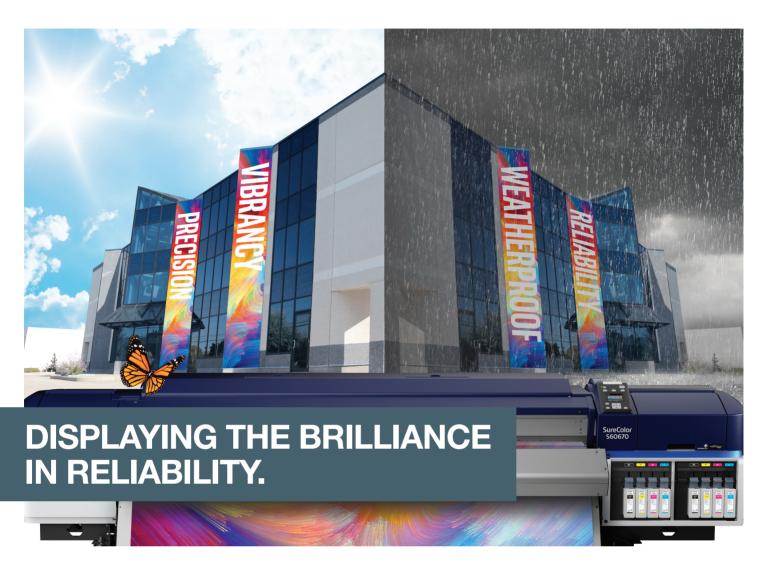

Epson UltraChrome™ GS3 ink is Greenguard Gold certified and meets the French-VOC A+







Up to 64" wide





Epson Environmentally Genuine Inks Friendly



4 COLOURS 4 INKS MAX.		GS3 ULTRACHROME	MAXIMUM MEDIA WIDTH	MAX. INK CAPACITY PER COLOUR	PRECISIONCORE TFP PRINTHEAD	PRINT SPEE	DS SQM/HR PRODUCTION**	
	SC-S40670		64"	700ML	SINGLE	8.6	16.6	
	SC-S60670 GS3INK	04	/ UUIVIL	DIIAI	146	21.6		

# **ENGINEERED FOR BUSINESS**

## **Exceptional Print Quality**

Showcasing Epson's industry-leading PrecisionCore™ printhead technology and UltraChrome™ GS3 ink, expect consistently vibrant quality with every print.

#### **Superb Reliability**

High-volume printing is made ultra-reliable with an advance precision media feeding system to ensure you minimal downtime.

#### **Engineered For Convenience**

Automatic media alignment, printhead cleaning and remote management features ensure you great ease during operations.







<sup>\*</sup> Only available on the SC-S60670.
\*\* Based on 8-pass printing for high quality and 4-pass printing for production, on banner media.

#### **SPECIFICATIONS** SURECOLOR™ SC-S40670/S60670




MODEL NUMBER	SC-S40670	SC-S60670		
SKU No.	C11CE44402	C11CE46402		
Printer Width	64 "			
Printing Technology				
Print Head	PrecisionCore™ TFP® Printhead	Dual PrecisionCore™ TFP® Printhead		
Nozzle Configuration	360 x 2 nozzles each colour (x4)	360 x 2 x 2 nozzles each colour (x4)		
Maximum Resolution	1440 x 1440 dpi			
Minimum Ink Droplet Volume	4.2 pl			
Print Speed				
Max Speed - 1 pass	Up to 58.4 m <sup>2</sup> /h (360 x 720 dpi)	Up to 95.3 m <sup>2</sup> /h (360 x 720 dpi)		
High Speed - 2 pass (Billboard)	Up to 29.4 m <sup>2</sup> /h (720 x 720 dpi)	Up to 52.3 m²/h (720 x 720 dpi)		
Production 1 - 3 pass	Up to 20.8 m²/h (720 x 720 dpi)	-		
Production 2 - 4 pass	Up to 16.6 m²/h (720 x 720 dpi)	Up to 31.6 m²/h (720 x 720 dpi)		
Production 3 - 6 pass	Up to 11.0 m <sup>2</sup> /h (720 x 1440 dpi)	Up to 20.7 m²/h (720 x 1440 dpi)		
High Quality - 8 pass	Up to 8.6 m <sup>2</sup> /h (720 x 1440 dpi)	Up to 14.6 m²/h (720 x 1440 dpi)		
Max Quality 1 - 12 pass	Up to 4.7 m <sup>2</sup> /h (1440 x 1440 dpi)	Up to 8.7 m <sup>2</sup> /h (1440 x 1440 dpi)		
Max Quality 2 - 16 pass	Up to 3.5 m²/h (1440 x 1440 dpi)	Up to 6.8 m²/h (1440 x 1440 dpi)		
Max Quality 3 - 24 pass	Up to 2.6 m²/h (1440 x 1440 dpi)	Up to 4.9 m²/h (1440 x 1440 dpi)		
nk System				
nk Type	Epson UltraChrome™ GS3 Ink Technology			
Colours	4 colours - Cyan, Magenta, Yellow, Black			
nk Capacity	700 ml ink cartridge			
Paper Handling	Rear roll feed (2 " / 3 " core with max 250 mm diameter and up to 45 kg); Auto take-up reel			
Media Type	-			
Printable Area	Max printing width: 1616 mm; Side Margin: 5 mm both sides, 10 mm with media holding plates			
Media Width	300 to 1626 mm			
Media Thickness	Up to 1 mm			
Heaters	Pre- and Platen- Heater (30 to 50 °C); After-Heater (30 to 55 °C)			
Control Panel	2.7 " Colour LCD			
Connectivity				
Printer Interfaces	Hi-Speed USB 2.0, 100BASE-TX / 1000BASE-T			
Printer Languages	Standard: ESC/P raster			
Printer Drivers	-			
Memory	512 MB main + 128 MB network			
Software	Standard: CD Installer, Communication Driver, EPSON Manuals Launcher, Operators Guides, General			
	Information, Epson Control Dashboard, EpsonNet Config, EpsonNet Setup, EpsonNet Print, Epson			
	Software Updater, Onyx RIPCenter			
Other Features	Auto Head Alignment Technology (Media feed and Bi-directional), Auto Nozzle Check System, Mail			
	Report System, Custom Paper Backup			
Power and Operating Requirements				
Power Requirements	Input voltage AC 100-240 V 50/60 Hz / 10 - 5 A			
Power Consumption	Operating: Approx. 480 W; Standby: Approx.	Operating: Approx. 745 W; Standby: Approx.		
	330 W w/ heater ON; Sleep: Approx. 12 W;	445 W w/ heater ON; Sleep: Approx. 13 W;		
	Power Off: Less than 1.5 W	Power Off: Less than 1.8 W		
Recommended Operating				
Temperature & Humidity	15 - 35 °C; 20 - 80 % RH (non-condensing)			
Printer Dimensions				
Dimensions	2,620 x 880 x 1,338 mm (W x D x H) (storage)	2,620 x 972 x 1,338 mm (W x D x H) (storage)		
Veight	279 kg (without ink)	291 kg (without ink)		
Bundled Items	Substrate Support System (C12C932361),	Substrate Support System (C12C932361),		
	Printer Starter Kit (include 1 set of inks and	Additional Print Drying System (C12C932381),		
	Onyx RIPCenter)	Printer Starter Kit (include 1 set of inks and		
	•	Onyx RIPCenter)		
Warranty	2 years limited warranty			

Dimensions & Weight SC-S40670

Weight: 279 kg (without ink)



SC-S60670 Weight: 291 kg (without ink)



#### nk Cartridge Compatibility

#### 700 ml Ink Cartridges

•	
<ul><li>Black</li></ul>	C13T892100
<ul><li>Cyan</li></ul>	C13T892200
<ul> <li>Magenta</li> </ul>	C13T892300
<ul> <li>Yellow</li> </ul>	C13T892400

#### Supplies & Optional Accessories

350 ml Cleaning Cartridge	C13T696000
Maintenance Parts Kit	C13S210044
Ink Cleaner	C13T699300
Cleaning Stick	C13S090013
Clean Room Wiper	C13S090016
Waste Ink Bottle	C13T724000
Additional Print Drying System	C12C932381
Media Holding Guide	C12C932411

© 2016 Epson Singapore Pte Ltd. All Rights Reserved.
Reproduction in part or in whole, without the written
permission from Epson, is strictly prohibited. EPSON and
EXCEED YOUR VISION are registered trademarks of Seiko
Epson Corporation. All other products names and other
company names used herein are for identification purposes
only and are the trademarks or registered trademarks of
their respective owners. Epson disclaims any and all rights
in those marks. Print samples shown are simulations only.
Specifications and product availability are subject to change
without notice and may vary between countries. Please
check with local Epson offices for more information.

Dealer's Stamp

### CAS TECHNOLOGY PTE LTD

A 10 Ubi Crescent

#05-52 Ubi Techpark (Lobby C) Singapore 408564

T (65) 6742 8355

F (65) 6742 9897

W www.castechnology.com.sg

Information correct at time of printing Printed February 2016





Sales Enquiries 800 120 5564











For latest specifications, visit www.epson.com.sg/largeformat or call 800 120 5564.