

## SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>MODEL NUMBER</b>                | <b>SD-10</b>   |
| <b>COLOUR MEASUREMENT</b>          |  |
| Technology                         | Spectroscopic Device   |
| Spectral Range                     | 400 – 700nm  |
| Sampling Interval                  | Colour Measurement   |
| Photometric Range                  | 10 nm (Interpolation by software)  |
| Measurement Frequency              | 13 times measurement per second (Scanning Mode)  |
| Measurement Geometry               | 45° Circumferential / Normal Geometry (45° c : 0°)   |
| Measurement Aperture               | Φ 7.6mm  |
| Light Source                       | LED (Including UV)   |
| Measurement Conditions             | M0: UV included (ISO 13655:2017)<br>M1: D50 (Equivalent to ISO 13655:2017)   |
| Calibration                        | White Reference Built-in Shutter   |
| Scan Length                        | 400mm  |
| Inter-Instrument Agreement         | 0.4 or less ΔE00 average<br>1.0 or less ΔE00 maximum<br>• Deviation from SD-10 manufacturing standard for 12 BCRA colour tiles (D50, 2°)<br>• Ambient temperature 23°C (73.4°F), humidity 50%  |
| Short Term Repeatability           | 0.1 ΔE94 White<br>• Average of 10 measurements every 3 seconds on white tile (D50, 2°)<br>• Ambient temperature 23°C (73.4°F), humidity 50%  |
| Colour difference from BCRA tile   | Calibration value 1.0 or less Δ E00 average<br>• Deviation from the colour measurement value for 12 BCRA colour tiles (D50, 2°) by a measuring instrument traceable to the national metrological standard<br>• Ambient temperature 23°C (73.4°F), humidity 50% |
| <b>LANGUAGE</b>                    |  |
| Supported Language                 | English / French / German / Dutch / Italian / Spanish / Portuguese / Turkish / Russian / Simplified Chinese / Traditional Chinese / Korean / Japanese  |
| <b>CONNECTIVITY</b>                |  |
| Interfaces                         | • USB Type-C<br>• USB 2.0 Full-Speed<br>• BLE Bluetooth Low Energy   |
| Memory                             | Number of saved data at Stand-alone (Spot Mode): 100 Colours   |
| <b>ENVIRONMENT CHARACTERISTICS</b> |  |
| Temperature (°C)                   | Operating: 0 °C – 40 °C (Spot Mode) / 0 °C – 35 °C (Scan Mode)<br>Storage: -20 °C – 60 °C  |
| Humidity                           | Operating: 5 – 85% (No Condensation)<br>Storage: 5 – 85% (No Condensation)   |
| <b>DIMENSIONS &amp; WEIGHT</b>     |  |
| Shutter Opened (W x D x H)         | 35 x 80 x 80 mm  |
| Shutter Closed (W x D x H)         | 35 x 80 x 77.6 mm  |
| Weight                             | Approx. 186g (Without Stand)   |
| <b>ELECTRICAL SPECIFICATION</b>    |  |
| Voltage                            | AC 220 – 240V  |
| Power Consumption                  | Operating: 5V  |
| <b>BATTERY SPECIFICATION</b>       |  |
| Battery Type                       | Lithium ion battery  |
| Battery Capacity                   | 1,860mAh   |
| <b>SYSTEM</b>                      |  |
| Support Software                   | Epson Edge Print Pro / Epson Spectrometer App  |

## PRODUCT DIMENSION



## WHAT'S IN THE BOX

- Set Up Guide\*
- Storage case
- Strap
- USB Type A to C cable
- Certificate of calibration

\* PDF user guide is provided on the web/CD-ROM of Open-Source software license document.

©2021 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.  
Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.  
Printed October 2021

## DIGITAL COLOUR SPECTROPHOTOMETER SD-10

**EPSON**  
EXCEED YOUR VISION

# PORTABLE AND ACCURATE COLOUR MANAGEMENT TOOL.



## Improve your printing workflow with Epson's first portable spectrophotometer.

Going digital with colour management is now easier than ever with the SD-10, Epson's first portable colour spectrophotometer. Businesses can save precious time on printing workflow with colour-matching acceleration and a user-friendly colour management system. With the lightweight device, you can easily and quickly compare colours, measure colour values, and reproduce the colour. Eliminate the hassle of analogue colour matching today!

Find the details at [www.epson.com.sg](http://www.epson.com.sg)



Epson Spectrometer App

Find out more at [www.epson.com.sg/gobig](http://www.epson.com.sg/gobig)

[f](#) EpsonSingapore [i](#) EpsonSingapore [v](#) EpsonSoutheastAsia [in](#) Epson Singapore

Epson Singapore Pte Ltd 438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500  
Epson Customer Care Center 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to [www.epson.com.sg/contact](http://www.epson.com.sg/contact) for opening hours.

### Great Portability

At just 186g with an LCD and built-in battery, you can use the SD-10 anywhere, anytime.


### Epson Spectrometer App

Connect to your smart devices seamlessly using the exclusive mobile app.

### Hassle-free Operation

Operate the SD-10 as a standalone, going PC-less and cable-less while on the go.

## DIGITAL COLOUR SPECTROPHOTOMETER SD-10

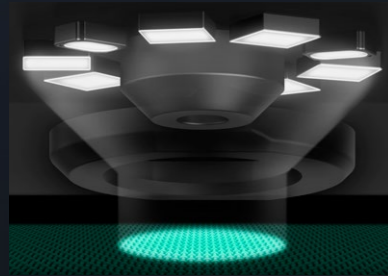

Marrying portability with with precision in colour matching, the Epson SD-10 spectrophotometer measures colours with high accuracy while on the go with high reliability. Engineered to ensure the ease of colour management, the SD-10 is especially useful for designers and businesses in the printing and art industry where it is essential to have highly accurate colour matching on the prints.

## Improved Colour Matching Workflow

Eliminate the time-intensive process of colour matching in an analogue workflow by going digital with SD-10. Instead of going through multiple visual checking and data adjusting, let Epson's spectrophotometer do the spot colour matching and reproduce exact colours, helping your business save on valuable time and costly manpower.

### Analogue Colour matching workflow by traditional colour swatches.

Averagely repeat this process up to **4 - 5** times.



- Step 1**  
Receiving the printing data from client.
- Step 2**  
Printing out the data to media customer requested by printer.
- Step 3**  
Comparing the printed colour with colour chart by visual judgement.
- Step 4**  
Input of colour values to softwares.
- Step 5**  
Printing out the adjusted data and confirming accuracy visually. Completing the colour matching.
- Step 6**  
Completing the colour matching.

### Digital Colour matching workflow by SD-10.

Averagely repeat this process up to **1 - 2** times.



- Step 1**  
Receiving the printing data from client.
- Step 2**  
Measuring the targeted colour using SD-10.
- Step 3**  
Alternatively, perform spot colour matching method using the Epson Edge Print Pro.
- Step 4**  
Print out the adjusted image.
- Step 5**  
Check for accuracy again using SD-10 and complete the workflow.
- Step 6**  
If necessary, compare using the colour charts for higher accuracy.

Valuable time saved on colour-matching process!

## Hassle-Free Operation

### Lightweight & Portable

The compact SD-10 weighs only 186g and is highly portable with its own carrying case and wrist strap.

### Network-free & PC-less Operation

Operate the SD-10 as a stand-alone unit without needing a PC or connecting to any network. The spectrophotometer is equipped with a LCD display and built-in battery for lasting operation, and is easily chargeable via USB Type C cable.



## Flexible Connectivity

### Epson Spectrometer App


Connect to the mobile application via Bluetooth to store the colour data and for easy reference in the future.



<sup>1</sup> SD-10 can connect to smartphone via Bluetooth.

### Wide Range of Software Compatibility

Using SD-10's USB Type-C<sup>2</sup> cable, you can easily connect to a wide selection of creative softwares to facilitate designing and printing process.

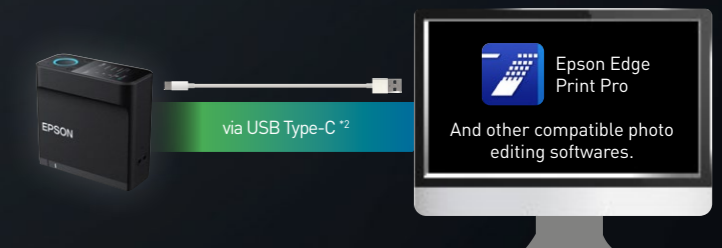

<sup>2</sup> SD-10 can connect to PC via USB-C cable.

## Intuitive Digital Design

### Graphical Information

Get all the colour-related information including the measurement figures and similar colours via the SD-10 app in both graphics and text. With gamut in/out profile, businesses can know immediately if the identified colour is printable or not.



Display Measurement Figures (Lab, LCH, LRV, HEX, RGB & CMYK)

Graph Display (Gamut outer line, display gamut in/out)

Single Colour Comparison

Multi Colour Comparison

<sup>\*</sup>Only solid color part can be replaced using the function of spot color matching in Epson Edge Print Pro.