


## 2 4G LED RGB Controller

### Main Characteristics


#### V3 RF RGB Remote Control

Remote Option:	RGB
Working Voltage:	3Vdc (Battery CR2032)
Wireless Frequency:	2.4GHz
Working Temperature:	-30 ~55
Package Size:	L150×W46×H18(mm)
Weight(G.W.):	85g

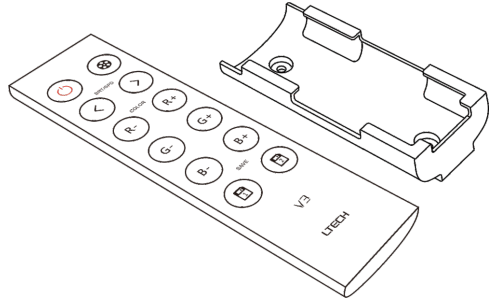


#### R4-3A CV Receiver

Input Voltage:	5~24Vdc
Max Current Load:	3A × 4CH Max. 12A
Max Output Power:	60W/144W/288W(5V/12V/24V)
Working Temperature:	-30 ~55
Package Size:	L127×W35×H24(mm)
Weight(G.W.):	60g



R4-3A



R4-5A/R4-CC

#### R4-5A CV Receiver


Input Voltage:	5~24Vdc
Max Current Load:	5A × 4CH Max. 20A
Max Output Power:	100W/240W/480W(5V/12V/24V)
Working Temperature:	-30 ~55
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	150g

Note: Receiver is sold separately.


#### R4-CC CC Receiver

Input Voltage:	12~48Vdc
Output Voltage:	3~46Vdc
Output Current:	CC 350/700/1050mA×4CH
Output Power:	1.05W~48.3W×4CH Max 193.2W
Working Temperature:	-30 ~55
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	165g


### Dimensions




V3



Holder




R4-5A/R4-CC




R4-3A

## Operating Instruction for Remote:

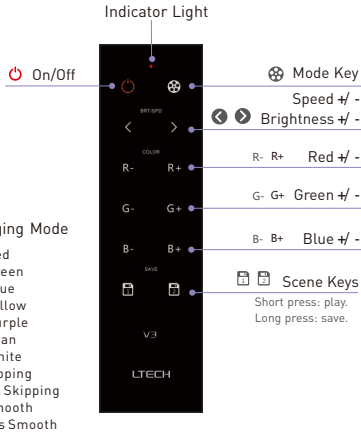


Match/Clear code between remotes

Match code:

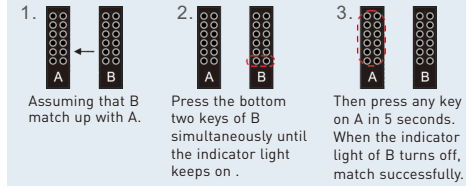


Clear code:




Match/Clear code between remote and receiver


Match code:

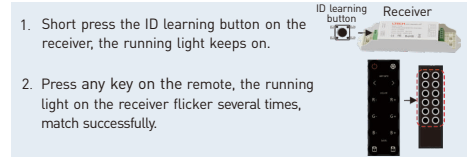


Clear code:



## Operating Instruction for Receiver:

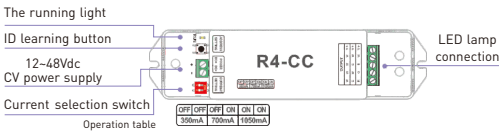

## Wiring Diagram :

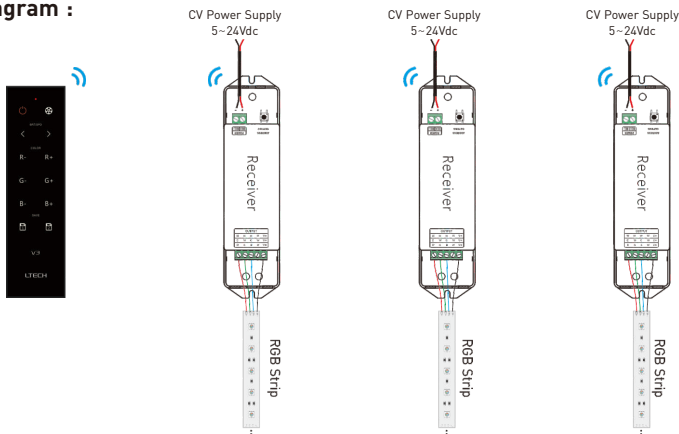

## Attention:

- Please replace the battery if the remote becomes insensitive or control distance is shortened.
- Please take out battery if unit is not used for a long time.