

HomeSiren Jeweller

Wireless siren with
external LED connector.

An Ajax hub is required for operation.




2
GRADE
EN 50131


PD 6662
2017


Key features


 Adjustable volume: from 80 dB to 98 dB

 Delay and security mode
changing indication


 External LED connector

 Remote control and setup via the app

 Adjustable alarm duration:
from 3 to 180 s

 Door opening notifications

 Effortless installation and replacement

 Connecting via QR code

Operating principle




Informs about alarms

The siren responds to tamper and security system alarms in less than a second. It is loud enough to scare away intruders and attract the attention of neighbours.

Serves as a security status indicator

The siren LED notifies that the facility is armed, and a sound signal indicates **Delay When Entering / Leaving**. These are helpful features for the users who control the security system with a keypad or key fob.

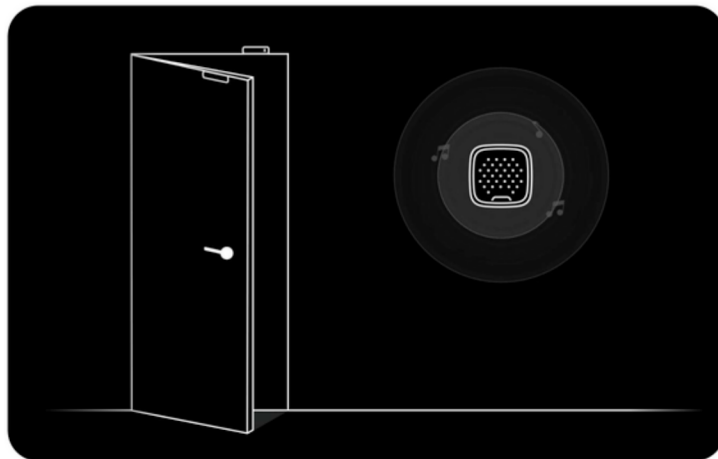

Notifies on door opening

When the **Chime** feature is enabled, the siren makes a special sound to indicate that the opening detectors are triggered when the system is disarmed. The feature is used, for example, in stores to notify employees that someone has entered the building.



Jeweller

communication technology



Jeweller is a two-way wireless protocol that provides fast and reliable communication between hubs and devices. The protocol delivers instant data-rich alarms: security companies and users know who and when has armed or disarmed the facility.

Jeweller features encryption and authentication to prevent forgery, and polling to display devices' status in real-time. Supporting up to 2,000 m of wireless connectivity, Jeweller is ready to protect facilities and deliver the best user experience for both end-users and installers.

Up to 2,000 m of two-way encrypted

Up to 5 years of operation on pre-

installed battery
and siren

2000wireless communication between hub

Technical specifications

<p>Compliance with standards</p> <p>EN 50131 (Grade 2) PD 6662:2017</p>	<p>Compatibility</p> <p>Hubs all Ajax hubs</p> <p>Range extenders all Ajax radio signal range extenders</p>
<p>Communication with control panel and range extenders</p> <p>Jeweller communication technology</p> <p>Frequency bands 866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the region of sales</p> <p>Maximum effective radiated power (ERP) ≤ 20 mW</p> <p>Communication range up to 2,000 m In an open space</p> <p>Polling interval 12 – 300 s Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Protection against forgery Device authentication</p>	<p>Features</p> <p>Types of notifications Acoustic LED</p> <p>Alarm volume from 80 to 98 dB at a distance of 1 m Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Alarm duration from 3 to 180 s Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Siren sound frequency 3.4 ± 0.5 kHz</p> <p>Additional LED connection 3 V An external LED works in parallel with the siren built-in LED and fully replicates its indication</p> <p>Chime The siren makes a special sound to notify that the opening detectors are triggered when the system is disarmed</p>

<p>Power supply</p> <p>Battery 2 × CR123A Pre-installed</p> <p>Battery life up to 5 years</p>	<p>Installation</p> <p>Operating temperature range from -10°C to +40°C</p> <p>Operating humidity up to 75%</p>
<p>Enclosure</p> <p>Colours white, black</p> <p>Dimensions 75 × 76 × 27 mm</p> <p>Weight 97 g</p> <p>Tampering alarm</p>	<p>Complete set</p> <p>HomeSiren Jeweller 2 × CR123A battery Pre-installed SmartBracket Connector for LED indicator Installation kit Quick Start Guide</p>