



TK3S Large Format Cutting System



IECHO Science Technology Co., LTD

No.1 Building, The Software Park
No.1 Wei Ye Road, Binjiang District
Hangzhou City 310053, Zhejiang Province, P.R.China
Phone: +86-571-8660 9560 Fax: +86-571-8669 8923
Website: www.iechosoft.com Email: sales@iechosoft.com

CAS TECHNOLOGY PTE LTD

A 10 Ubi Crescent
#05-52 Ubi Techpark (Lobby C)
Singapore 408564

T (65) 6742 8355

F (65) 6742 9897

W www.castechnology.com.sg

AKI System

The depth of cutting tool can be controlled accurately by the automatic knife initialization system.



X Axis Two Motors

For the extreme wide beam, use the two motors with the balance technology, make the transmission more stable and accurate.




Diversified Cutting Tools

In order to meet different industrial cutting requirements, the cutting head can be flexibly chosen from the standard head, punching/notching head, and the milling head.



IECHO Automatic Camera Positioning System

Equipped with high precision CCD camera, the system realizes automatic position on all kinds of materials, automatic camera registration cutting, and solves problems of inaccurate manual position, and print distortion, thus to complete procession task easily and precisely.



Higher Efficiency Cutting Head

Cutting speed can reach to 1.5m/s, which is 4-6 times of traditional manual way. Intelligent control system of Z-axis height decreases cutting tools' moving distance, shortens working time and thus improves the production efficiency.



IECHO Safety Device

Anti-collision protective device and Infrared blocking device ensures operator's safety at most high-speed working condition.



IECHO Motion Control System

IECHO motion control system, CUTTERSERVER is the center of cutting and controlling, enables smooth cutting circles and perfect cutting curves.



Gear

Providing high speed, durability, excellent dynamic for cutting high density materials. The system can provide excellent dynamic condition under enormous workload.




Software

Processing of larger sizes of materials can be realized by page cutting function.



Dual Beams Cutting Systems

Equipped with double beams cutting system, can highly increase your production efficiency.

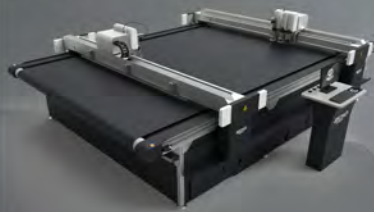

IECHO Continuous Cutting System

With the intelligent conveyor system, to achieve cutting and picking up the samples at the same time. It totally saves the labor cost and improves the efficiency significantly.




Ergonomic Design

To strengthen the stability of the machine, TK3S adopts new aviation aluminum material with high intensity, corrosion resistance and strong tenacity. At the meantime the design of TK3S system is ergonomic friendly which allows you to have better humanized experience of operation control and processing materials.




Flexible Working Area

The modularized working area can be added according to customers' requirements.



Aviation Aluminum Honeycomb Panel

Application of aviation aluminum honeycomb panel, making the inside air of panel moves freely, ensures the stability of structure without the influence of thermal expansion and contraction effect. Meanwhile, mutually constrained dense cells respectively and averagely bear the force from the panel to ensure the high-level flatness of the working table even of quite large size.



TK3S Large Format Cutting System

TK3S big format cutting system provides best choice for multi-industries automatic processing. Its system can be precisely used for full cutting, half cutting, engraving, creasing, grooving and marking. Meanwhile, precise cutting performance could meet your large format requirement. user-friendly operating system will show you a perfect processing results.



TK3S Dual Beams Large Format Cutting System

SIZE

Length Width	2500mm	3500mm	5500mm	Customized Size
1550mm	TK3S-2515 Cutting Area 2500mmx1550mm Floor Area 3300mmx2300mm	TK3S-3515 Cutting Area 3500mmx1550mm Floor Area 4300mmx2300mm	TK3S-5515 Cutting Area 5500mmx1550mm Floor Area 6300mmx2300mm	Based on the standard size of TK3S, can customize the machine according to customer's special requirements.
2100mm	TK3S-2521 Cutting Area 2500mmx2100mm Floor Area 3300mmx2900mm	TK3S-3521 Cutting Area 3500mmx2100mm Floor Area 4300mmx2300mm	TK3S-5521 Cutting Area 5500mmx2100mm Floor Area 6300mmx2900mm	
3200mm	TK3S-2532 Cutting Area 2500mmx3200mm Floor Area 3300mmx4000mm	TK3S-3532 Cutting Area 3500mmx3200mm Floor Area 4300mmx4000mm	TK3S-5532 Cutting Area 5500mmx3200mm Floor Area 6300mmx4000mm	

PARAMETERS

Pump Vacuum	1-2Unit 5.5kw	2-3Unit 5.5kw	3-4Unit 5.5kw
Beam	Single Beam	Can select single beam or dual beams	
Speed	1500mm/s		
Cutting Accuracy	0.1mm		
Thickness	50mm		
DataFormat	DXF, HPGL		
Interface	Serial Port		
Media	Vacuum System		
Power	220V/50HZ 380V/50HZ		
OperatingEnvironment	Temperature 0°C-40°C Humidity 20%-80%RH		

Automobile Upholstery

TK3S large format cutting system provides a total solution for a wide variety of materials used in the automotive industry including textiles, PVC and many other interior components.



Sign & Advertising/ Packaging

TK3S large format cutting system provides a total cutting solution to the advertising industry, Especially in terms of PP paper, KT board, Foam board, stickers, corrugated board, honeycomb and other materials processing. It can be equipped with high-speed milling spindle for acrylic, aluminum plastic plate and other hard materials processing. with the automatic rolls/sheets feeder, it could full-time automatic production.



Furniture & Textile

TK3S large format cutting system provides an integrated cutting solution to the home textile industry, not only significantly improved the textile utilization and processing efficiency, but also can effectively improve product's quality. To achieve high efficiency of products, low supplies cost, and quality optimization.




Composites

TK3S large format cutting system can replace hand-painting, hand-cutting and other traditional crafts in the composite material products processing, especially for irregular, irregular patterns and other complex samples, effectively improved the production efficiency and cutting accuracy.



Garment & Textile

Equipped with Driven Rotary Tool(DRT), Notch & Punching Tool(PPT) and automatic correction system, TK3S large format cutting system provides an integrated cutting solution to Brand garments, advanced custom made garments industry.

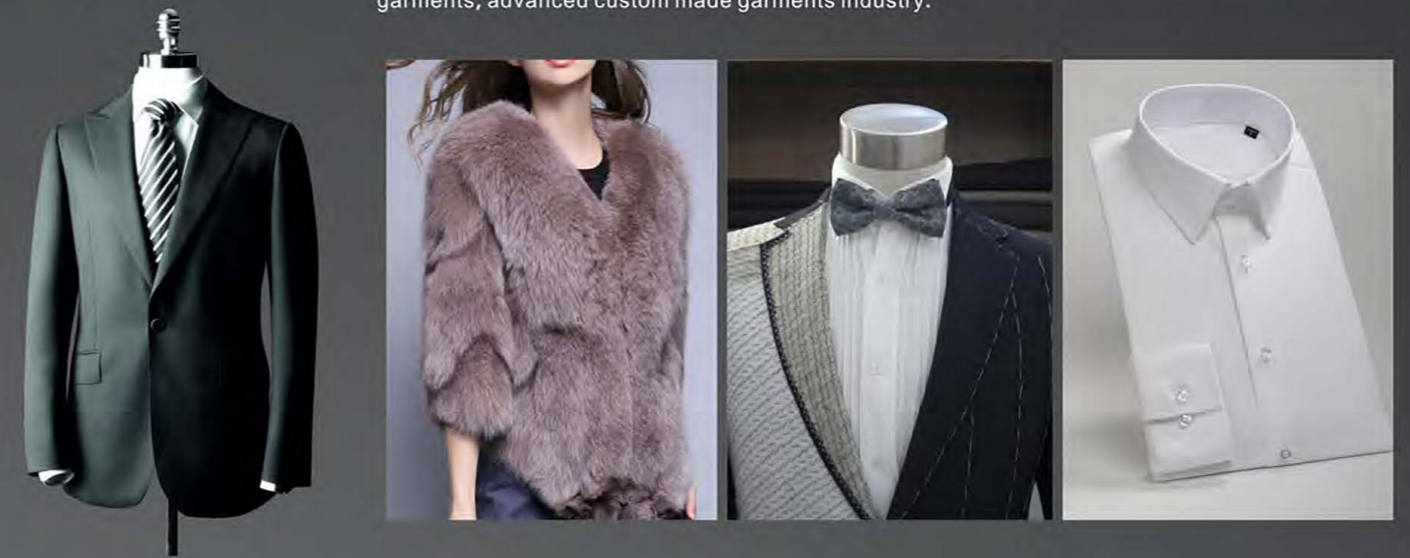


Other Industries

TK3S large format cutting system is widely applied to global non-metallic industries, such as footwear, luggage, membrane, sporting goods, toys, wind power, medical supplies etc. In order to provide professional and stable integrated cutting solution for non-metal industrial customers.







IECHO EOT Electronic Oscillating Knife for cutting soft and medium density materials, available with 1mm stroke.

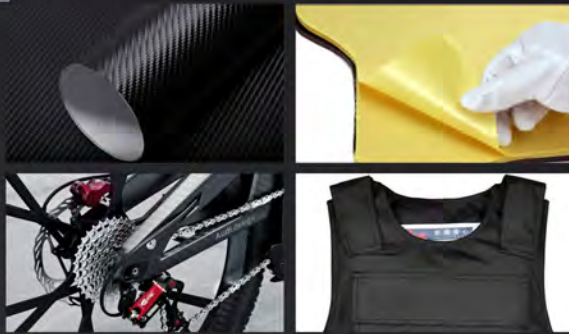


IECHO DRT Driven Rotary Tool for cutting textiles.

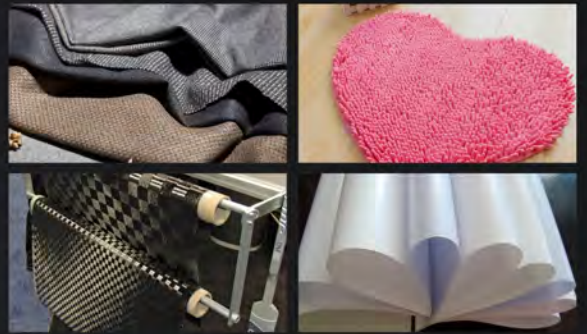

IECHO UCT Universal Cutting Tool, used for through cutting materials with thicknesses up to 5 mm at high speed at low cost.

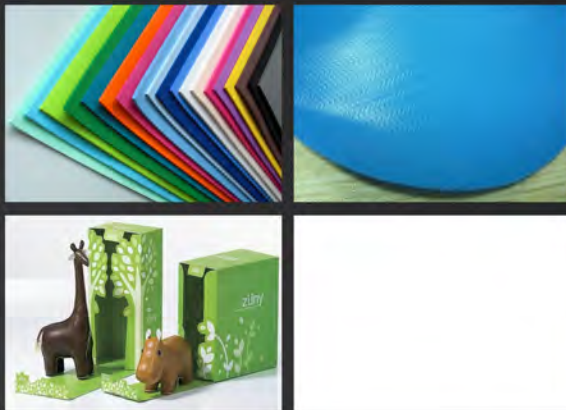

IECHO V-CUT The V-Cut tool is the perfect tool for producing complex structural designs from foam core or sandwich board materials. The tool can be set for cutting 5 different angles for different cutting requests. The 5 different angles are 0°, 15°, 30°, 45° respectively.

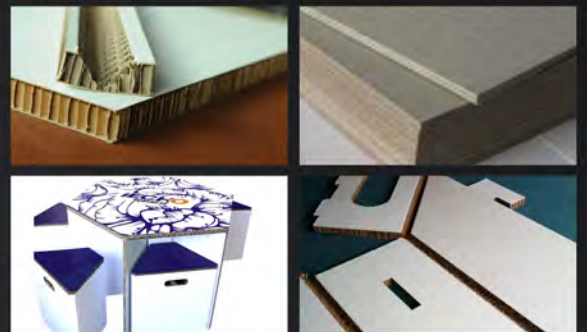

IECHO KCT Kiss Cut Tool, for cutting vinyl, foil, films, thin paper, cardboard and other thin materials.



IECHO CTT The CTT Tool is used for creasing corrugated materials. A selection of creasing tools allows perfect creasing in many substrates.



IECHO RZ The router operates at speeds up to 60,000 RPM, and delivers solid performance on a wide range of rigid and flexible materials. Highly precise engraving capabilities include kiss cutting. Efficient dust extraction helps maintain a clean healthy work environment.



IECHO POT The Pneumatic Oscillating Tool is an air driven tool operating at high frequency to cut materials. Stroke is adjustable up to 8 mm, and is capable of cutting hard dense materials. Blades are available to permit cutting materials up to 50 mm thick.

