



inquiry@hykolity.com

www.hykolity.com

+1 (562) 456-0507



80W/100W/120W

3000K/4000K/5000K

LED CANOPY LIGHT

BRIGHT

TRUSTED

HIGH-QUALITY


LED CANOPY LIGHT

DESCRIPTION


LED CANOPY LIGHT | 120-277VAC, 50-60HZ | 3000K-4000K-5000K SELECTABLE | IP65

APPLICATION

Warehouses | Offices | Factories | Hospitals | Hotels | Gas Stations

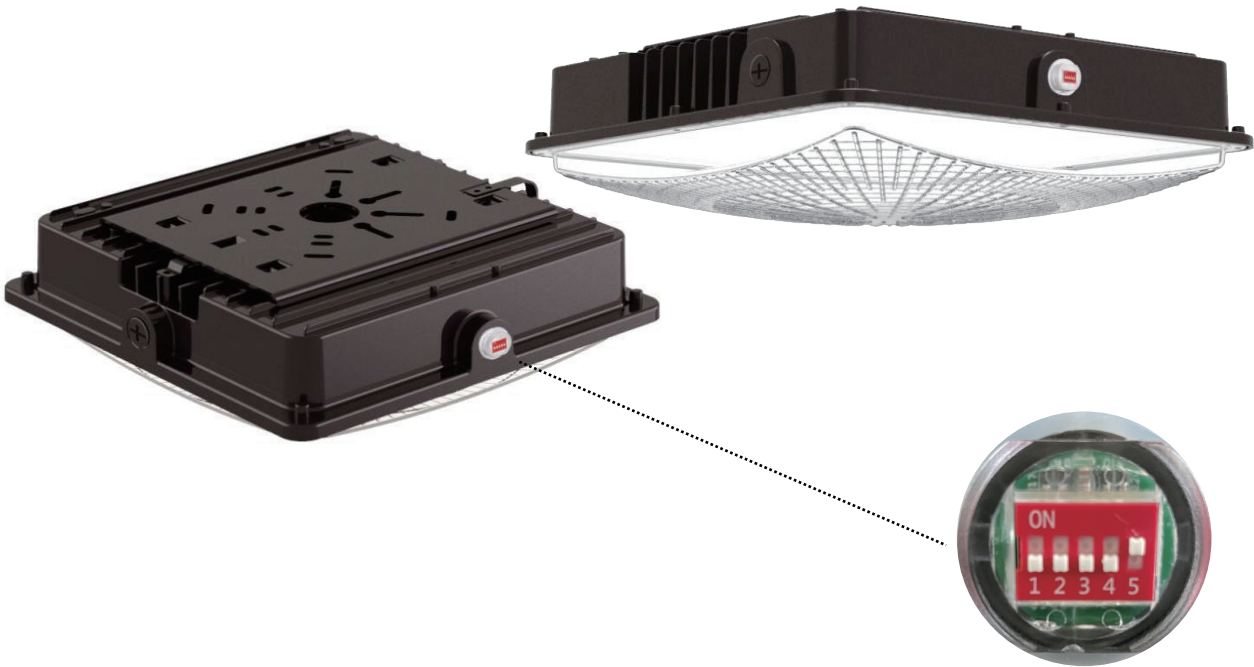

DIMENSION

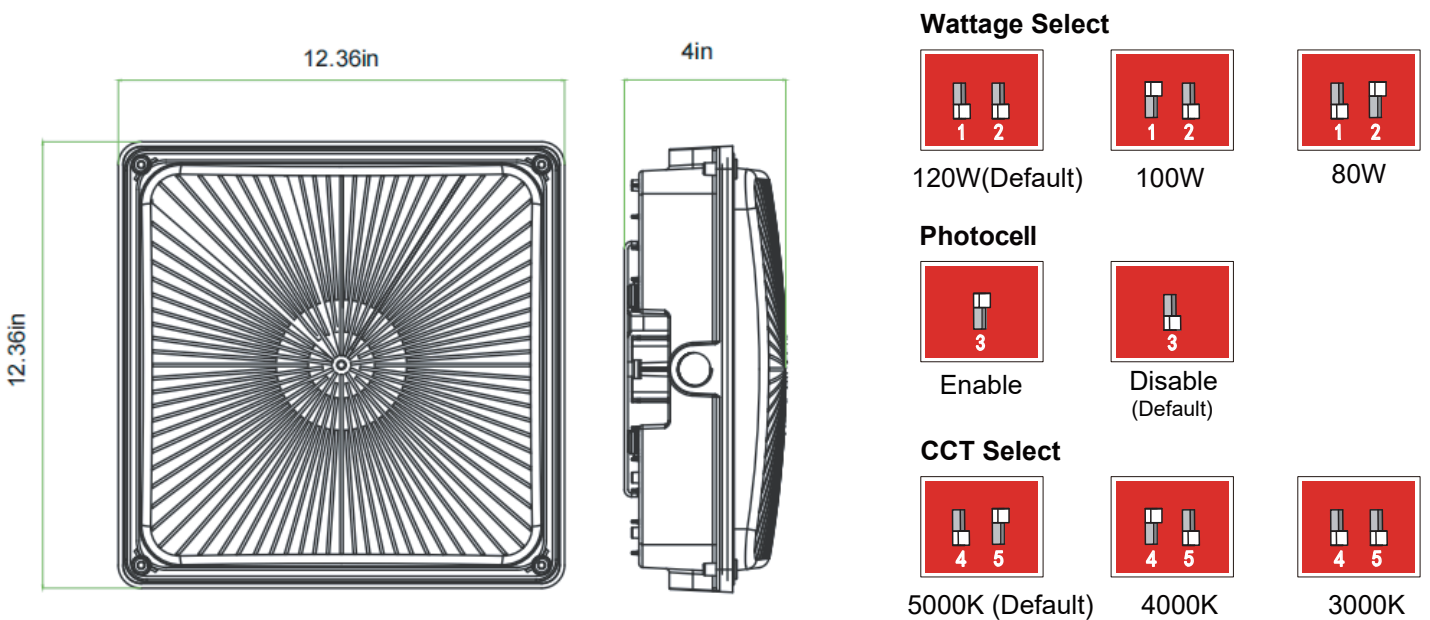

LED CANOPY LIGHT

SPECIFICATIONS

Wattage	80W/100W/120W
Color Temperature	3000K/4000K/5000K
Efficacy	130LM/W
Input Voltage	120-277V
Lifespan	50,000 hours
Chips	Lumiled 2835
Beam Angle	160°
PF	>0.9
Dimming	0-10V
Lumens	10400LM/13000LM/15600LM
CRI	>70
Housing Color	Black
Waterproof Rating	WET (IP65)
SPD	4KV
Certification	UL, DLC, FCC Listed
Operating Temperature	-40°F ~ 122°F
Warranty	5 Years

INSTALLATION GUIDE




PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is forbidden as it may cause personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 50°C (-40°F to 122°F).
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Surface Mount with Jbox


1. Loosen the screw on the side of the housing and pull out the connecting plate.

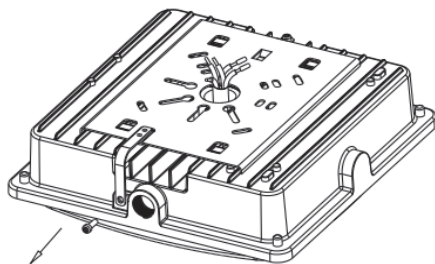

2. Fix the connecting plate onto the ceiling and put the wire through center hole.

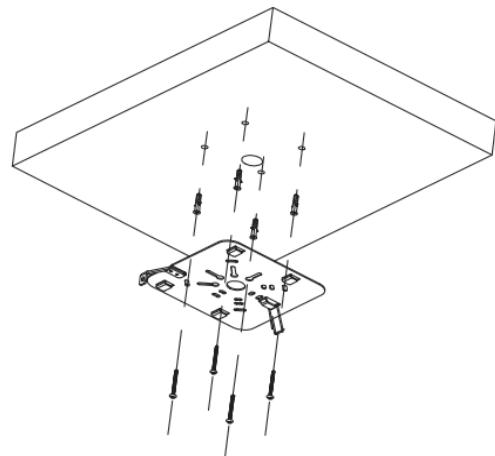


3. If you need to use the surface-mounted installation, a circle of glue is needed around the edge of the fixed plate.





Put a circle of glue around the edge

5. Slide lamp back into the connecting plate and fix the screw.

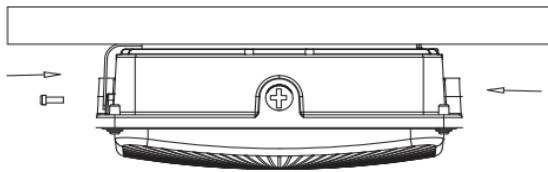


4. Buckle the connecting plate into the clips and connect the wires as shown below. PS: Wire the dimming wires (DIM+/DIM-) if needed, otherwise hide them in junction box.

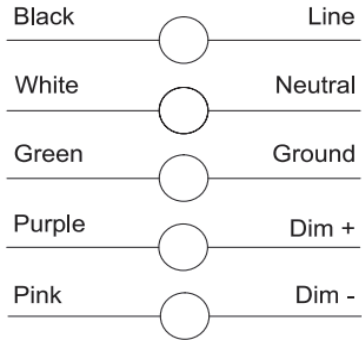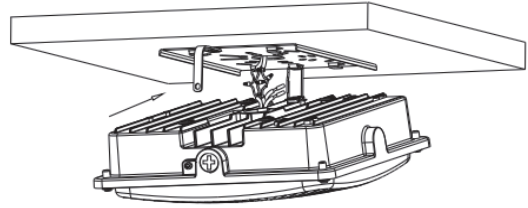


Pendant Installation with 3/4 inch conduit



1. Loosen the screw on the side of the housing and pull out the connecting plate.

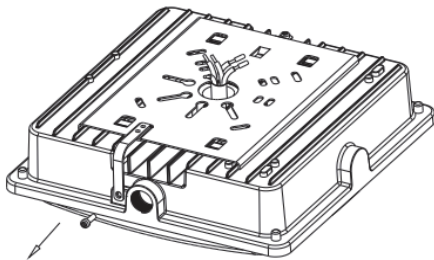

2. Connect the wires as shown below. PS: Wire the dimming wires (DIM+/DIM-) if needed, otherwise hide them in junction box.

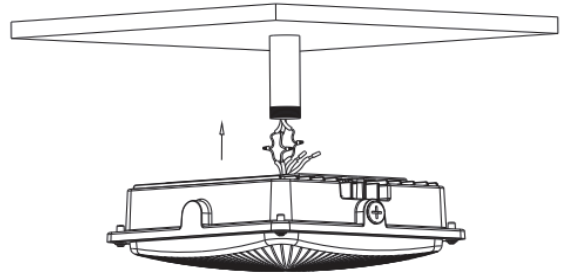

3. Screw the lamp and conduit pole together tightly.

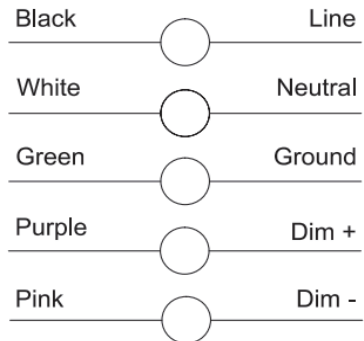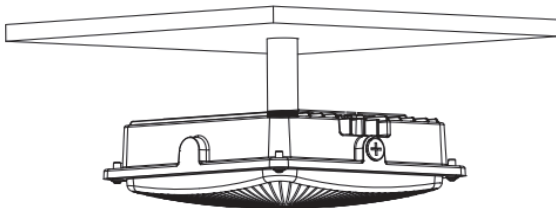

CCT & Power Select Guidance

Warning:

1. Select desired CCT & Power before operation!

2. Cap must be screwed back after CCT & Power selection!

