


## FITZROY WALL MOUNTED

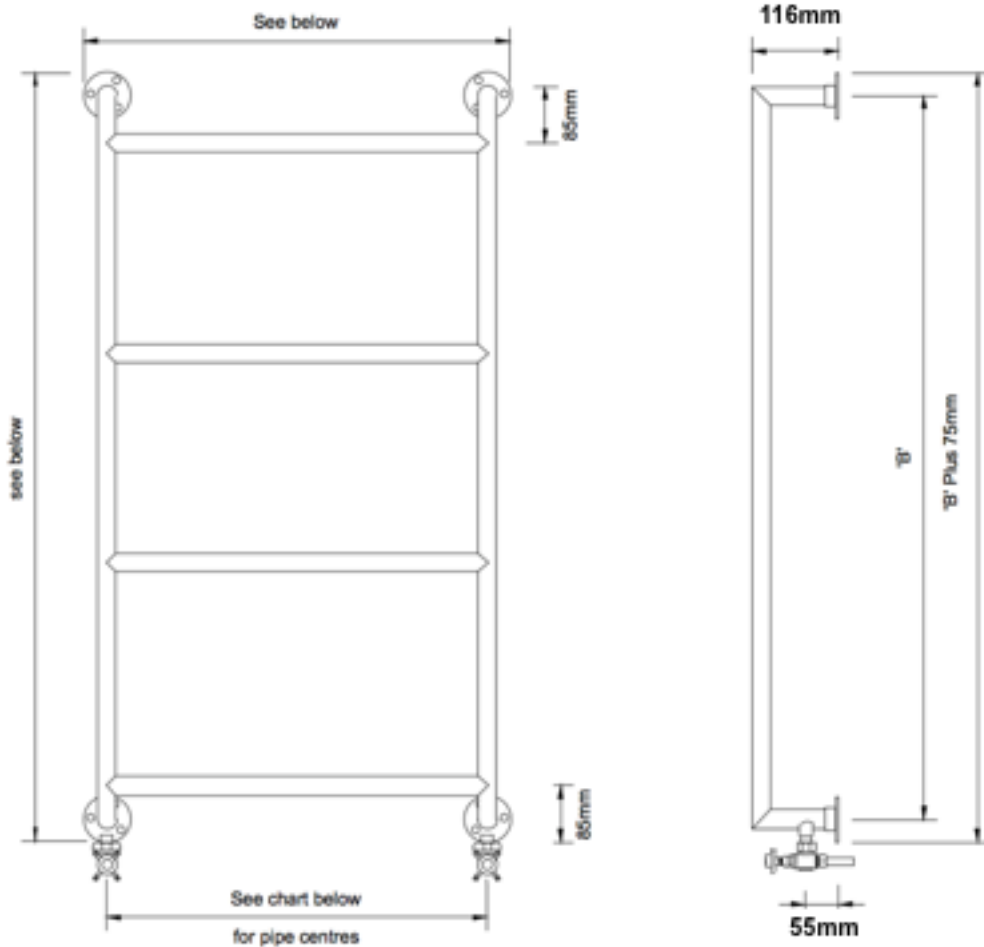

**Test pressure:** 8 BAR

**Max. working pressure:** 5 BAR

**Max working temperature:** 100°C

**Material:** 32mm DZR Brass

**Connections:** ½ inch BSP tapping's

**Joints:** Hand silver soldered

**Finish:** Hand polished, plated to British Standards

**Leak Tested:** Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464

[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

# RUTLAND RADIATORS – TECHNICAL SPECIFICATION

## Fitzroy Wall Mounted

Dimensions (mm) (HxWxD):	Pipe Centres (mm):	Pipe Centres from Wall (mm):	No. of Horizontal Bars:	BTU's:	Watts:
685 x 400 x 116	325	55	3	420	123
685 x 500 x 116	425	55	3	480	141
685 x 685 x 116	610	55	3	546	160
685 x 837 x 116	762	55	3	624	182
685 x 989 x 116	914	55	3	703	206
837 x 400 x 116	325	55	3	575	169
837 x 500 x 116	425	55	3	595	174
837 x 685 x 116	610	55	3	624	183
1000 x 400 x 116	325	55	4	655	192
1000 x 500 x 116	425	55	4	675	198
1000 x 685 x 116	610	55	4	695	204
1294 x 400 x 116	325	55	4	675	198
1294 x 500 x 116	425	55	4	700	205
1294 x 685 x 116	610	55	4	860	252
1599 x 400 x 116	325	55	5	810	237
1599 x 475 x 116	400	55	5	887	260
1599 x 575 x 116	500	55	5	978	286
1599 x 685 x 116	610	55	5	1068	313
1854 x 475 x 116	400	55	6	1030	302
1854 x 575 x 116	500	55	6	1125	330
1854 x 685 x 116	610	55	6	1240	363

*Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.*

### Included:

12 x Brass plated screws.

Valves and tails available from [www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk) at an additional cost.

### Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

### Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464

[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

## RUTLAND RADIATORS – TECHNICAL SPECIFICATION

This towel warmer can be supplied to fit:

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.

**Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464**

**[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.**

**Drawings and dimensions are supplied to a tolerance of +/- 3mm**