


MARKHAM WALL MOUNTED

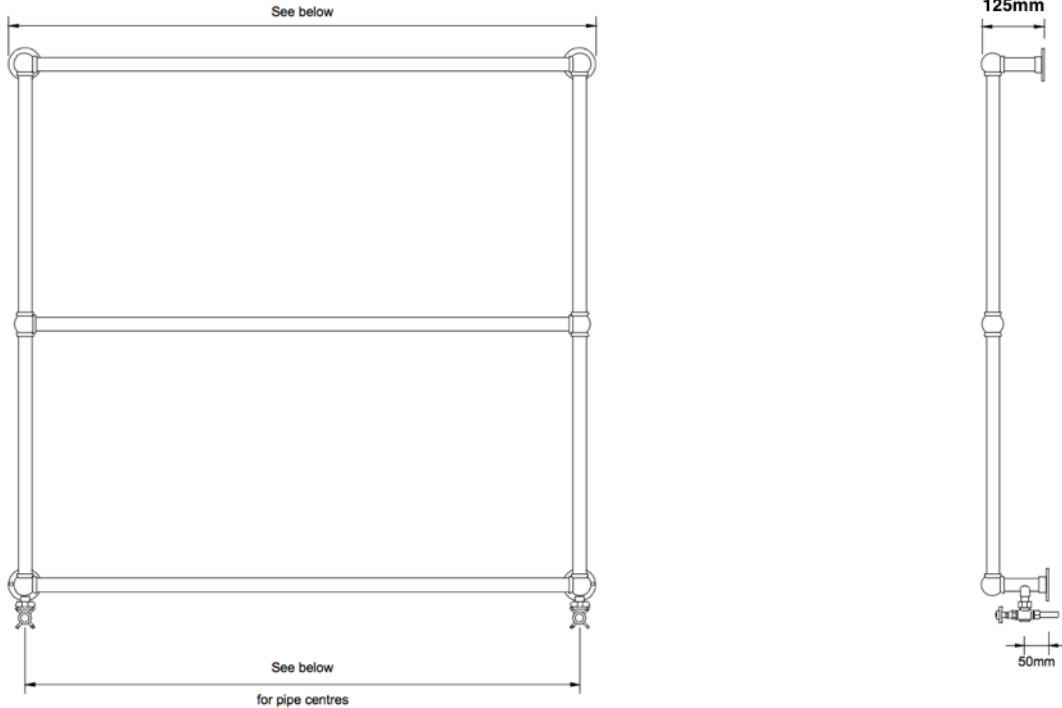

Test pressure: 8 BAR
Max. working pressure: 5 BAR
Max working temperature: 100°C
Material: 32mm DZR Brass
Connections: ½ inch BSP tapping's
Joints: Hand silver soldered
Finish: Hand polished, plated to British Standards
Leak Tested: Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Markham

Dimensions (mm) (HxWxD):	Pipe Centres (mm):	Pipe Centres from Wall (mm):	No. of Horizontal Bars:	BTU's:	Watts:
400 x 685 x 125	610	55	3	420	123
685 x 685 x 125	610	55	3	546	160
400 x 837 x 125	762	55	3	575	169
685 x 837 x 125	762	55	3	624	183
400 x 989 x 125	914	55	3	640	188
685 x 989 x 125	914	55	3	703	206
685 x 1200 x 125	1125	55	3	830	243
685 x 1380 x 125	1325	55	3	910	266

Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464
www.rutland-radiators.co.uk

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.
Drawings and dimensions are supplied to a tolerance of +/- 3mm

Included:

12 x Brass plated screws.

Valves and tails available from www.rutland-radiators.co.uk at an additional cost.

Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

Our towel warmers can be supplied to fit:

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.