


PORTMAN WALL MOUNTED

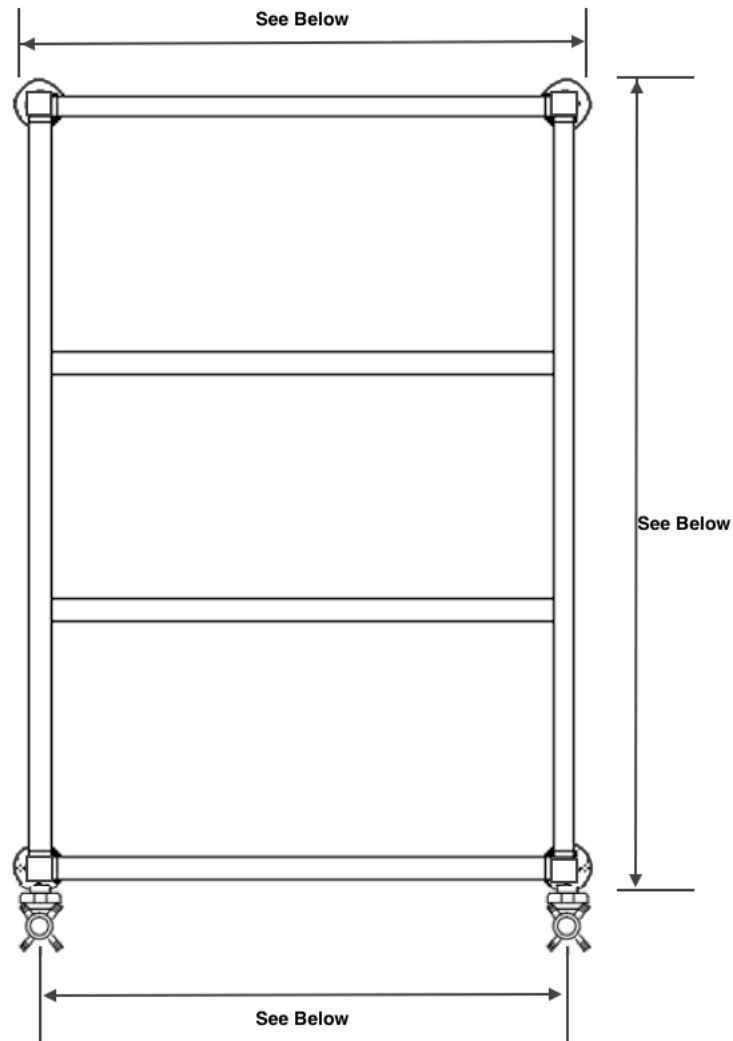

Test pressure: 8 BAR

Max. working pressure: 5 BAR

Max working temperature: 100°C

Material: 32mm DZR Brass

Connections: ½ inch BSP tapping's

Joints: Hand silver soldered

Finish: Hand polished, plated to British Standards

Leak Tested: Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464

www.rutland-radiators.co.uk

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of ± 0.3 mm

RUTLAND RADIATORS – TECHNICAL SPECIFICATION

Wall Mounted Portman

| Dimensions (mm) (HxWxD): | Pipe Centres (mm): | Pipe Centres from Wall (mm): | No. of Horizontal Bars: | BTU's: | Watts: |
|--------------------------|--------------------|------------------------------|-------------------------|--------|--------|
| 685 x 400 x 125 | 325 | 55 | 3 | 420 | 123 |
| 685 x 500 x 125 | 425 | 55 | 3 | 480 | 141 |
| 685 x 685 x 125 | 610 | 55 | 3 | 546 | 160 |
| 837 x 400 x 125 | 325 | 55 | 3 | 575 | 169 |
| 837 x 500 x 125 | 425 | 55 | 3 | 595 | 174 |
| 837 x 685 x 125 | 310 | 55 | 3 | 624 | 183 |
| 1000 x 400 x 125 | 325 | 55 | 4 | 655 | 192 |
| 1000 x 500 x 125 | 425 | 55 | 4 | 675 | 198 |
| 1000 x 685 x 125 | 610 | 55 | 4 | 695 | 204 |
| 1294 x 400 x 125 | 325 | 55 | 4 | 675 | 198 |
| 1294 x 500 x 125 | 425 | 55 | 4 | 700 | 205 |
| 1294 x 685 x 125 | 610 | 55 | 4 | 860 | 252 |
| 1599 x 400 x 125 | 325 | 55 | 5 | 810 | 237 |
| 1599 x 475 x 125 | 400 | 55 | 5 | 887 | 260 |
| 1599 x 575 x 125 | 500 | 55 | 5 | 978 | 286 |
| 1599 x 685 x 125 | 610 | 55 | 5 | 1068 | 313 |
| 1854 x 475 x 125 | 400 | 55 | 6 | 1030 | 302 |
| 1854 x 575 x 125 | 500 | 55 | 6 | 1125 | 330 |

Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.

Included:

12 x Brass plated screws.

Valves and tails available from www.rutland-radiators.co.uk at an additional cost.

Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

This towel warmer can be supplied to fit:

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464

www.rutland-radiators.co.uk

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of ± 3 mm

RUTLAND RADIATORS – TECHNICAL SPECIFICATION

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.

Rutland London Limited: E: sales@rutland-radiators.co.uk Tel: 01252 790 464

www.rutland-radiators.co.uk

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of ± 3 mm