


## REDCLIFFE

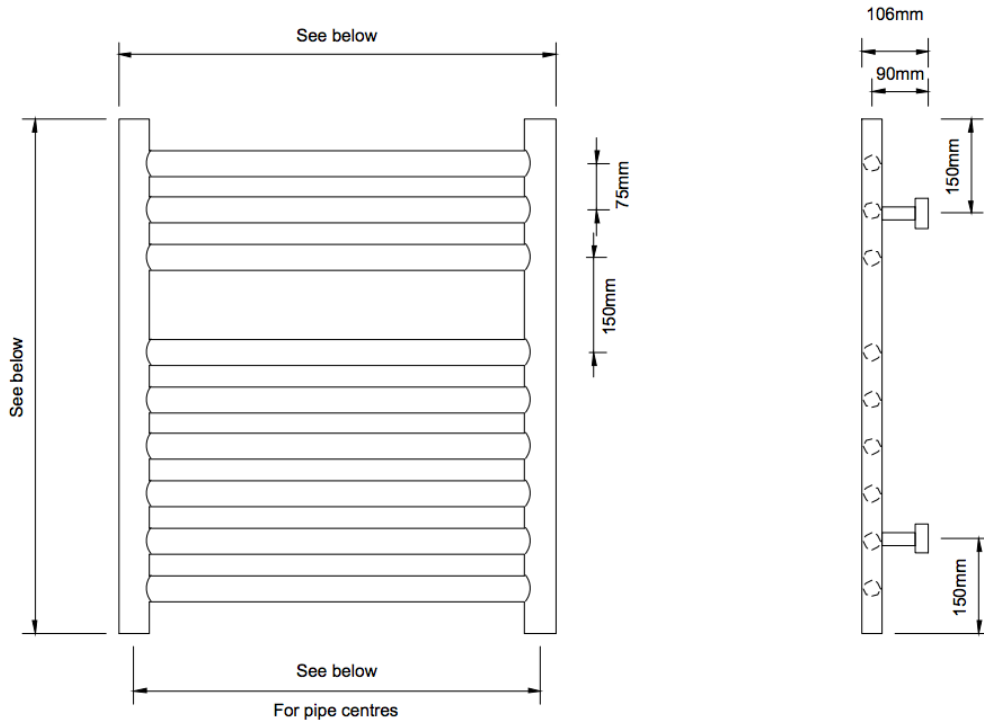

**Test pressure:** 8 BAR

**Max. working pressure:** 5 BAR

**Max working temperature:** 100°C

**Material:** 32mm/25mm DZR Brass

**Connections:** ½ inch BSP tapping's

**Joints:** Hand silver soldered

**Finish:** Hand polished, plated to British Standards

**Leak Tested:** Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464

[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

# RUTLAND RADIATORS – TECHNICAL SPECIFICATION

## Redcliffe

Dimensions (mm) (HxWxD):	Pipe Centres (mm):	Pipe Centres from Wall (mm):	No. of Horizontal Bars:	BTU's:	Watts:
750 x 300 x 106	268	90	3 + 6	891	261
750 x 400 x 106	368	90	3 + 6	1027	295
750 x 500 x 106	468	90	3 + 6	1123	329
750 x 600 x 106	568	90	3 + 6	1239	363
1000 x 300 x 106	268	90	3 + 9	1109	325
1000 x 400 x 106	368	90	3 + 9	1249	366
1000 x 500 x 106	468	90	3 + 9	1392	408
1000 x 600 x 106	568	90	3 + 9	1535	450
1200 x 300 x 106	268	90	3 + 4 + 7	1341	393
1200 x 400 x 106	368	90	3 + 4 + 7	1522	446
1200 x 500 x 106	468	90	3 + 4 + 7	1706	500
1200 x 600 x 106	568	90	3 + 4 + 7	1887	553
1500 x 300 x 106	268	90	3 + 6 + 9	1641	481
1500 x 400 x 106	368	90	3 + 6 + 9	1873	549
1500 x 500 x 106	468	90	3 + 6 + 9	2109	618
1500 x 600 x 106	568	90	3 + 6 + 9	2341	686

*Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.*

### Included:

4 x 50mm Steel Crosshead screws

4 x Rawl plugs

4 x Washers

1 x Allen key

Valves and tails available from [www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk) at an additional cost.

### Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

Please see our cleaning advice on [www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk) for more information.

### Installation:

Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464

[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.

Drawings and dimensions are supplied to a tolerance of +/- 3mm

## RUTLAND RADIATORS – TECHNICAL SPECIFICATION

We always advise that our products are installed by a competent and experienced professional or tradesperson.

This towel warmer can be supplied to fit:

- Central Heating Systems
- Hot Water Systems
- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.

**Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464**

**[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.**

**Drawings and dimensions are supplied to a tolerance of +/- 3mm**