


## THURLO WALL MOUNTED

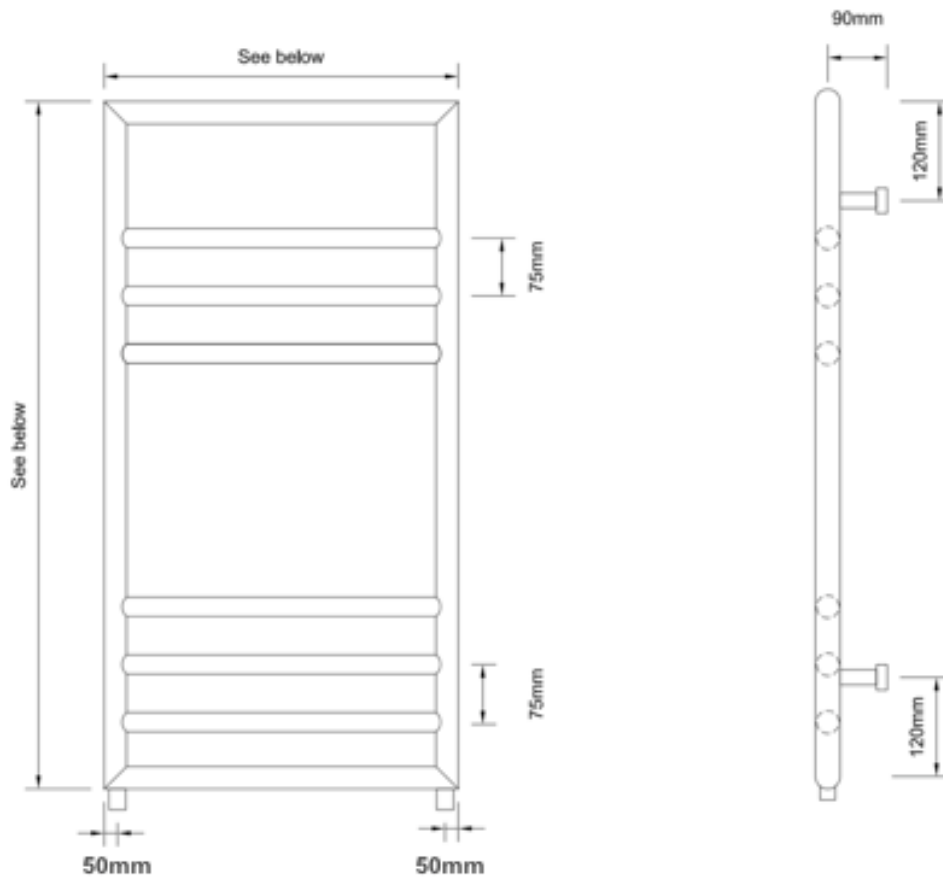

**Test pressure:** 8 BAR

**Max. working pressure:** 5 BAR

**Max working temperature:** 100°C

**Material:** 50mm horizontal cross tubes, 25mm vertical tubes from DZR Brass.

**Connections:** ½ inch BSP tapping's

**Joints:** Hand silver soldered

**Finish:** Hand polished, plated to British Standards

**Leak Tested:** Twice

Heat output determined in accordance with EN 442

Manufactured by Rutland Radiators in Hampshire, England.

Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464  
[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)

Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.  
Drawings and dimensions are supplied to a tolerance of +/- 3mm

# RUTLAND RADIATORS – TECHNICAL SPECIFICATION

## Thurlo

Dimensions (mm) (HxWxD):	Pipe Centres (mm):	Pipe Centres from Wall (mm):	No. of Horizontal Bars:	BTU's:	Watts:
750 x 300 x 106	200	90	1 + 3 + 3	620	182
750 x 400 x 106	300	90	1 + 3 + 3	682	200
750 x 500 x 106	400	90	1 + 3 + 3	750	220
750 x 600 x 106	500	90	1 + 3 + 3	825	242
1000 x 300 x 106	200	90	1 + 4 + 4	860	252
1000 x 400 x 106	300	90	1 + 4 + 4	940	275
1000 x 500 x 106	400	90	1 + 4 + 4	1017	298
1000 x 600 x 106	500	90	1 + 4 + 4	1110	325
1200 x 300 x 106	200	90	1 + 5 + 5	1205	353
1200 x 400 x 106	300	90	1 + 5 + 5	1125	330
1200 x 500 x 106	400	90	1 + 5 + 5	1220	357
1200 x 600 x 106	500	90	1 + 5 + 5	1324	388
1500 x 300 x 106	200	90	1 + 7 + 7	1566	459
1500 x 400 x 106	300	90	1 + 7 + 7	1705	499
1500 x 500 x 106	400	90	1 + 7 + 7	1850	542
1500 x 600 x 106	500	90	1 + 7 + 7	2012	589

*Please note, all designs can be adapted to individual requests, please call 01252 790464 to discuss your requirements with our design team.*

### Included:

- 4 x 50mm Steel Crosshead screws
- 4 x Rawl plugs
- 4 x Washers
- 1 x Allen key

Valves and tails available from [www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk) at an additional cost.

### Cleaning Instructions:

Please ensure you visit the Rutland Radiators website prior to undertaking any cleaning of the towel warmer.

Always avoid chemicals and abrasive cloths/pads.

### Installation:

We always advise that our products are installed by a competent and experienced professional or tradesperson.

This towel warmer can be supplied to fit:

- Central Heating Systems
- Hot Water Systems

**Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464  
[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.  
 Drawings and dimensions are supplied to a tolerance of +/- 3mm**

## RUTLAND RADIATORS – TECHNICAL SPECIFICATION

- Dual Fuel Systems
- Electric only option

Please confirm with your installer/contractor that there is not a water softener on the system prior to installation.

**Rutland London Limited: E: [sales@rutland-radiators.co.uk](mailto:sales@rutland-radiators.co.uk) Tel: 01252 790 464  
[www.rutland-radiators.co.uk](http://www.rutland-radiators.co.uk)**

**Rutland Radiators reserves the right to alter finishes and dimensions without prior notification.  
Drawings and dimensions are supplied to a tolerance of +/- 3mm**