



Nothing But LED's Area Light is included amongst best-selling products, with over 200,000 pieces sold in the last eight years. The Area Light offers high efficacy, with up to 170 lumens per watt for maximum power savings and rebates from power companies. These Area Lights have a new heat sink design that ensures a longer lifespan for the products. These products are a perfect solution primarily for outdoor applications such as lighting parking areas, loading docks and other general lighting applications.

Product Features


- Up to 170 lumens per watt
- Wattage Adjustable
- Input Voltage 120-277Vac / 480Vac optional
- Optional Screw-in photocell
- Dimmable 0-10V
- Ultra-thin sleek design
- Optional Screw-in photocell
- Built-in 10KV Surge protector
- Multiple bracket options
- Heat-resistant polycarbonate optical lens
- Die-Cast Aluminum Housing
- UL & DLC Listed
- 5 Year Warranty

LED AREA LIGHT



SKU #	Model #	Wattage Adjustable	Lumens	CCT	Housing	Input Voltage	Dimming	Certifications
1560179	BLT-S-GB-300WJ30T 3A6BR10SP50	200W/240W/300W	51000Lm	5000K	Bronze	120V-277V	0-10V	UL & DLC
1560241	BLT-S-G12C-300WBH T3SA2-BR10SP50W	200W/240W/300W	51000Lm	5000K	Black	120V-277V	0-10V	UL & DLC
1560181	BLT-S-GB-300WJ30 T3A5-BR10SP50	300W	51000Lm	5000K	Bronze	277V-480V	0-10V	UL & DLC

Correlated Color Temperature (CCT)

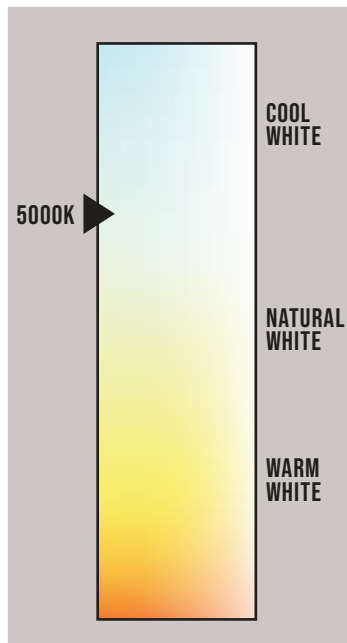

Optional Photocell



SKU #. 110786

Yoke Mount (Optional)



SKU #. 156612 (Black)



SKU #. 156611 (Bronze)

SKU: 1560179

Specifications

Parameter	Description	Value
General Performance	Model #	BLT-S-GB-300WJ30T3A6BR10SP50
	Wattage Adjustable	200W / 240W / 300W
	Lumen	Up to 51000LM
	Lumen Efficacy	Up to 170LM/W
	Color Temperature	5000K
	CRI (Ra)	>80
	Beam Angle	150 * 90 Degree
	Distribution Pattern	Type III
Electrical	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	0-10V Dimming
	PF	≥0.9
	Driver Model	SS-160NH-E260BH
	Surge Protector	L/N-PE: 10kV, L-N: 10kV
Physical	Operating Temperature	Without Motion Sensor: -40°C TO 50°C; With Motion Sensor: -35°C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	720 PCS
	Housing	Die-cast aluminum
Qualification	Housing Color	Bronze
	IP Rating	IP65
	Warranty	5 Year

LED AREA LIGHT



SKU: 1560241 Specifications

Parameter	Description	Value
General Performance	Model #	BLT-S-G12C-300WBHT3SA2-BR10SP50W
	Wattage	200W / 240W / 300W
	Lumen	Up to 51000LM
	Lumen Efficacy	Up to 170LM/W
	Color Temperature	5000K
	CRI (Ra)	>80
	Beam Angle	150 * 90 Degree
	Distribution Pattern	Type III
Electrical	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	0-10V Dimming
	PF	≥0.9
	Driver Model	SS-160NH-E260BH
	Surge Protector	L/N-PE: 10kV, L-N: 10kV
Physical	Operating Temperature	Without Motion Sensor: -40°C TO 50°C; With Motion Sensor: -35°C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	720 PCS
	Housing	Die-cast aluminum
Qualification	Housing Color	Black
	IP Rating	IP65
	Warranty	5 Year


SKU: 1560181

Specifications


Parameter	Description	Value
General Performance	Model #	BLT-S-GB-300WJ30T3A5-BR10SP50
	Wattage	300W
	Lumen	Up to 51000LM
	Lumen Efficacy	Up to 170LM/W
	Color Temperature	5000K
	CRI (Ra)	>80
	Beam Angle	150 * 90 Degree
	Distribution Pattern	Type III
Electrical	Input Voltage	277-480Vac
	Frequency	50/60Hz
	Dimming	0-10V Dimming
	PF	≥0.9
	Driver Model	SS-160NH-E260BH
	Surge Protector	L/N-PE: 10kV, L-N: 10kV
Physical	Operating Temperature	Without Motion Sensor: -40°C TO 50°C; With Motion Sensor: -35°C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	720 PCS
	Housing	Die-cast aluminum
Qualification	Housing Color	Bronze
	IP Rating	IP65
	Warranty	5 Year

Dimensions


Universal Bracket

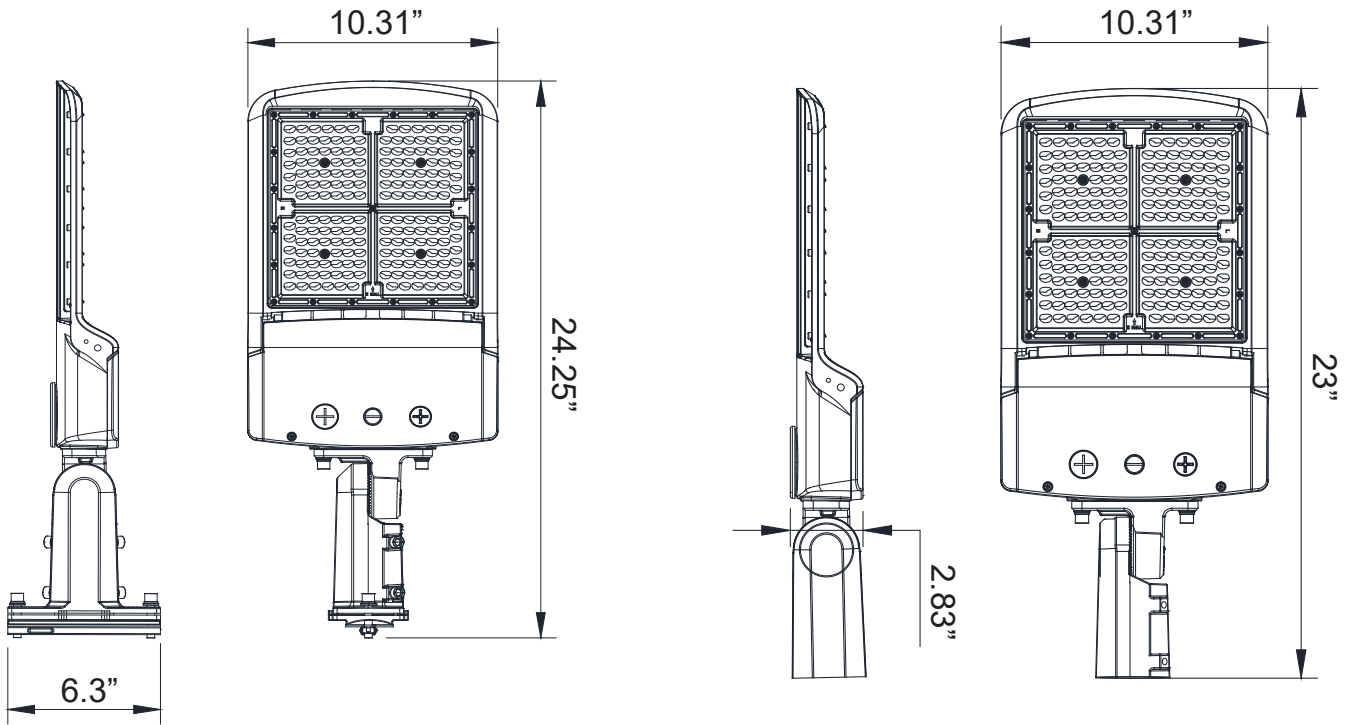

Yoke Mount

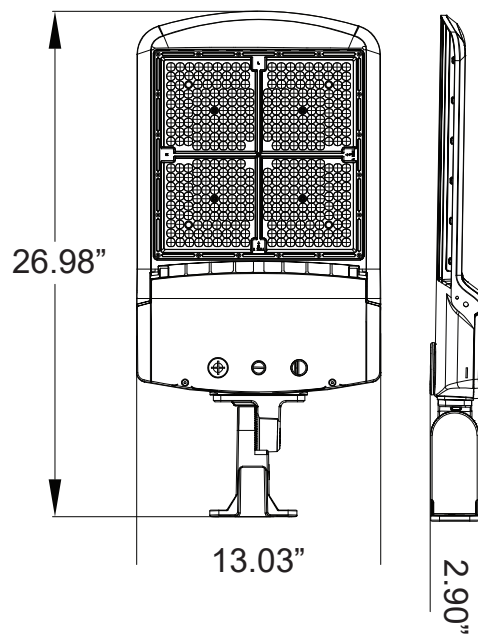



SKU: 1560179 - 1560241 Photometric Data

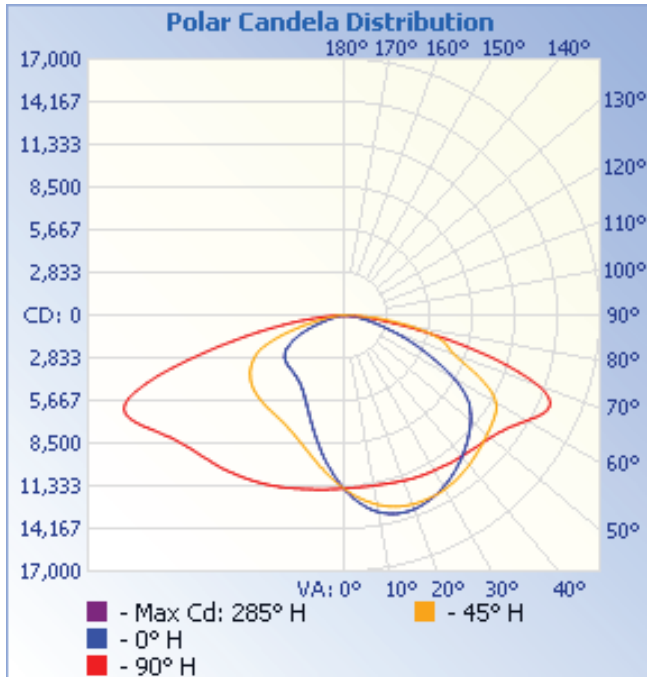

Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	39.8 fc	53.9 ft	118.4 ft
34.0ft	9.94 fc	107.8 ft	236.9 ft
51.0ft	4.42 fc	161.7 ft	355.3 ft
68.0ft	2.49 fc	215.6 ft	473.8 ft
85.0ft	1.59 fc	269.4 ft	592.2 ft
102.0ft	1.10 fc	323.3 ft	710.7 ft

■ Vert. Spread: 115.5°
■ Horiz. Spread: 148.0°

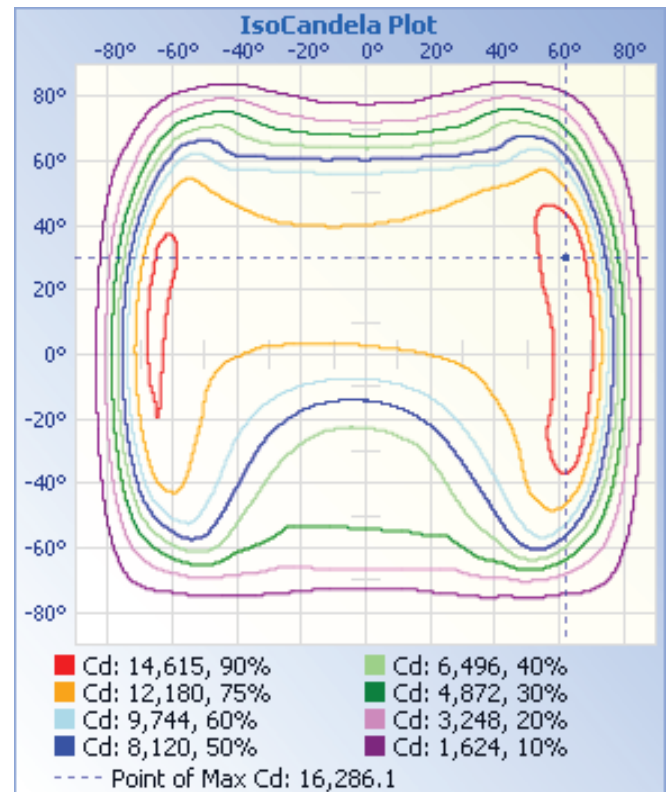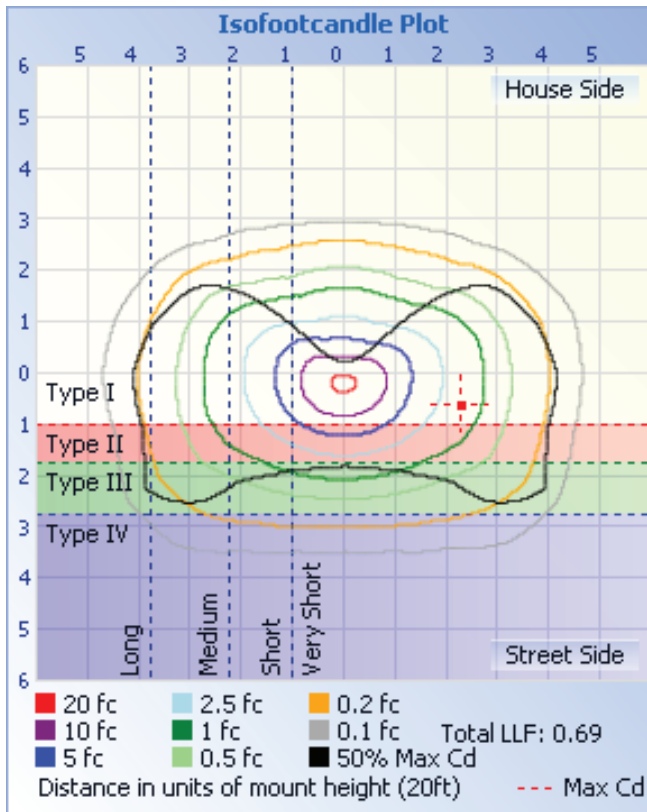


LED AREA LIGHT



SKU: 1560181



Photometric Data

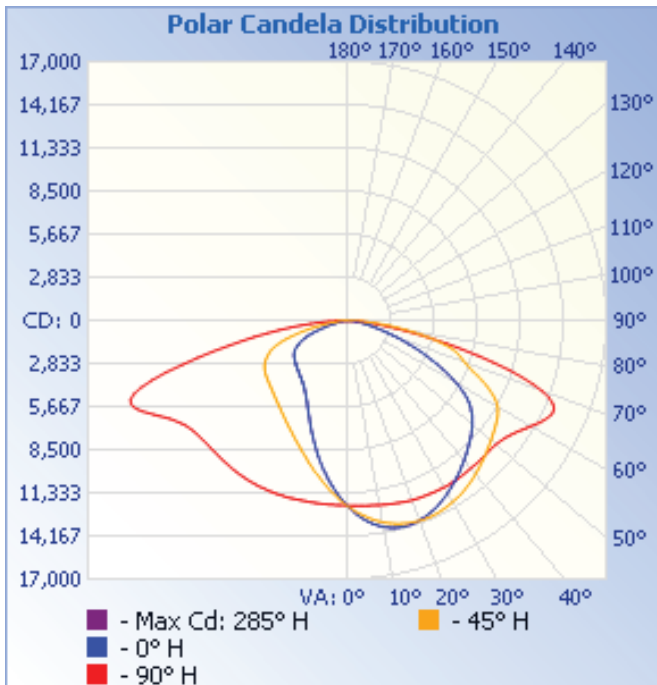

Illuminance at a Distance

Center Beam fc	Beam Width	Illuminance (fc)
17.0ft	42.1 fc	56.1 ft 118.4 ft
34.0ft	10.5 fc	112.2 ft 236.7 ft
51.0ft	4.67 fc	168.3 ft 355.1 ft
68.0ft	2.63 fc	224.5 ft 473.4 ft
85.0ft	1.68 fc	280.6 ft 591.8 ft
102.0ft	1.17 fc	336.7 ft 710.2 ft

■ Vert. Spread: 117.6°
■ Horiz. Spread: 147.9°

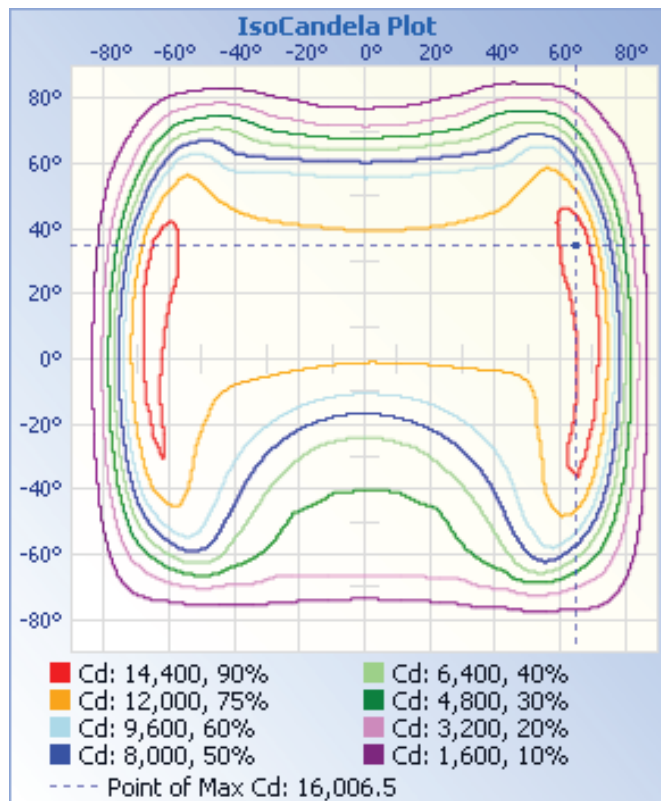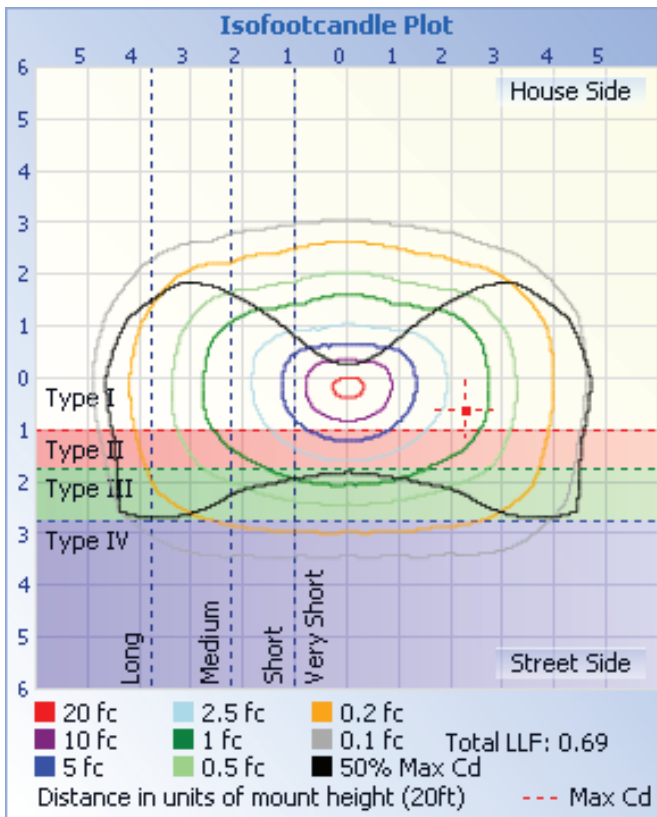

LED AREA LIGHT

Installation

Cautions:

1. Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. To avoid electrical shock and damage, please do not install the lights in raining days.


Notices:

1. To prevent from electric shock or fire risk, the installation must be conducted by operator who have professional electrical knowledge.
2. Please wear gloves to avoid injury before installing lamps.
3. During or after installation, if there are situations such as smoke, fire in the wires or lamps, please turn off the power immediately and notify relevant personnel of an overhaul.
4. This light can be used for outdoor installation.

Instructions:


1. This product has dimming and non-dimming function, which differs in installation ways.
2. 3 dimming functions are available in this shoebox light:
 - (1). Constant current can be achieved by 0-10VDC dimming.
 - (2). PWM signal dimming.
 - (3). Variation of resistance unit dimming (Please choose the appropriate dimming way according to your needs. You can also choose not to use this function).
3. Choose the wire connection ways, dimming ways and installation ways according to your needs and the led fixture purchased.

Wiring Diagram:

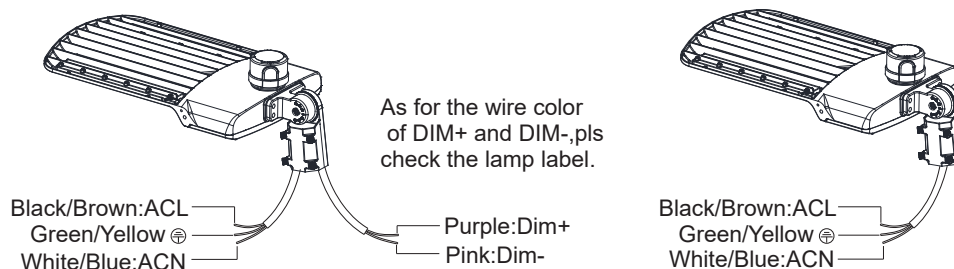

Optional Brackets and Installation Instructions

There are 5 optional brackets for this fixture. The following is shoebox fixtures with different brackets

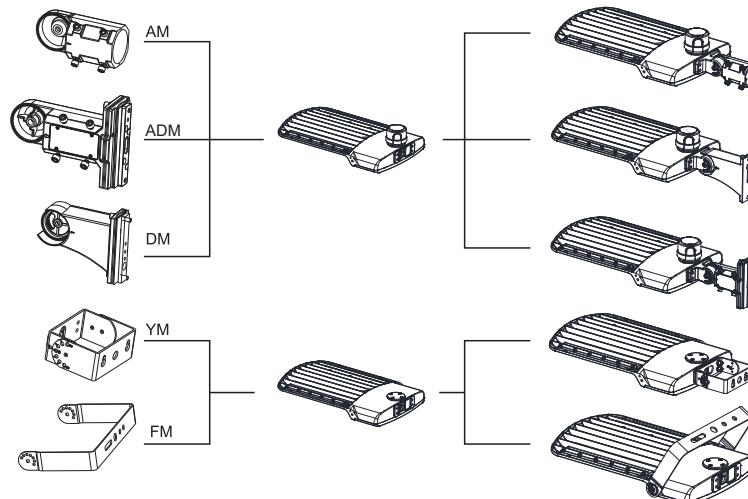

Installation

Installation Instructions with different brackets:

1. ADJUSTABLE FITTER MOUNTING (AM)

Step 1: Remove the bracket mounting screws on the fixture and run the wires through the bracket. (Figure 1)

Step 2: Install the bracket on the fixture. (Figure 2)

2. ADJUSTABLE FITTER MOUNTING & DIRECT MOUNTING (ADM)

Step 1: Remove the bracket mounting screws on the fixture, open the side lid of bracket and run the wires through the bracket. (Figure 3)

Step 2: Install the bracket on the fixture, then cover the side lid and tighten it. (Figure 4)

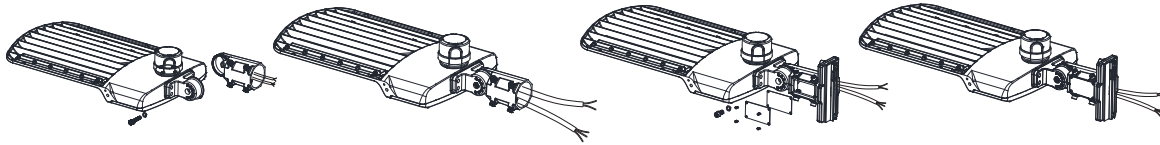


Figure 1

Figure 2

Figure 3

Figure 4

3. DIRECT MOUNTING (DM)

Step 1: Remove the bracket mounting screws on the fixture, open the side lid of bracket and run the wires through the bracket. (Figure 5)

Step 2: Install the bracket on the fixture, then cover the side lid and tighten it. (Figure 6)

4. YOKE MOUNTING (YM)

Step 1: Remove the bracket mounting screws on the fixture and run the wires through the bracket. (Figure 7)

Step 2: Install the bracket on the fixture. (Figure 8)

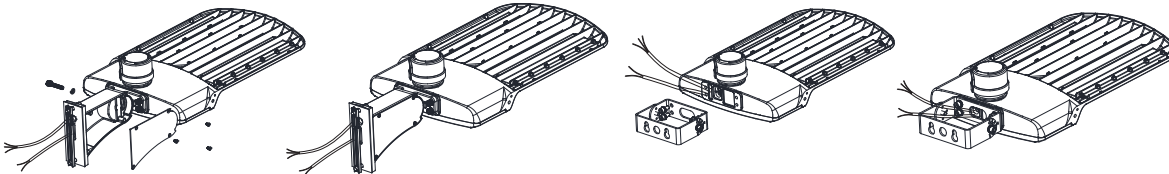


Figure 5

Figure 6

Figure 7

Figure 8

5. FLOOD MOUNTING (FM)

Step 1: First install two big screws. (Figure 9)

Step 2: Install two small screws. (Figure 10)

Installation of LED Lamps:

1. ADJUSTABLE FITTER MOUNTING (AM)

Step 1: Loosen the four bolts on AM bracket, connect the wires correctly, and pull the wires into the poles. (Figure 11)

Step 2: Place the bracket into the pole and lock the four bolts. (Figure 12)

Notice: Adjustable angle is 0-90° (Figure 11)

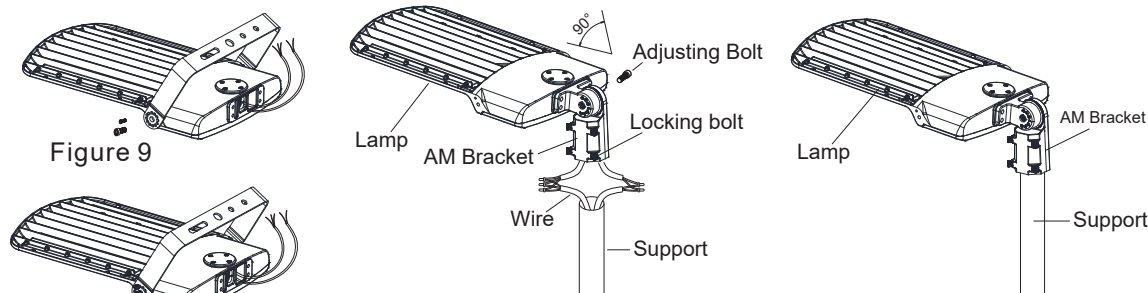


Figure 9

Figure 10

Figure 11

Figure 12

Installation

2. ADJUSTABLE FITTER MOUNTING & DIRECT MOUNTING (ADM)

2.1 ADJUSTABLE FITTER MOUNTING

Step 1: Remove the spare parts from ADM bracket. (Figure 13).

Step 2: Loosen the four bolts on ADM bracket, connect the wires correctly, and pull the wires into the poles.(Figure 14)

Step 3: Place the bracket into the pole and lock the four bolts. (Figure 14)

Notice: Adjustable angle is 0-90°(Figure 14)

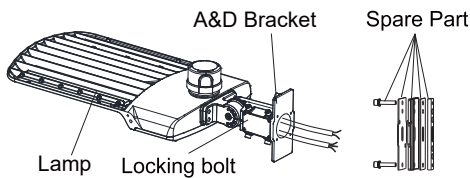


Figure 13

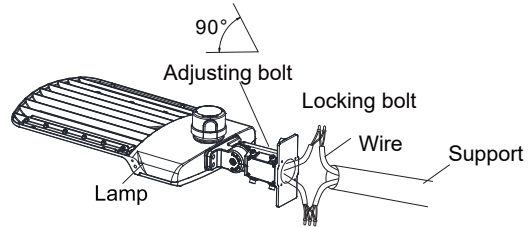


Figure 14

2.2 DIRECT MOUNTING

Step 1: Remove the four bolts from ADM bracket, remove the four rubber plugs from installation bar, put the four rubber plugs on the place where the four bolts were previously placed on the bracket for waterproof purpose(Figure 15)

Step 2: Fix ADM bracket to square pole with bolt, open the cover of ADM bracket junction box, pull the wire into bracket junction box, connect the wire properly and cover the junction box. (Figure 16)

Notice: Adjustable angle is 0-90°.(Figure 16)

Same as round pole installation, please remember to use the adapting plate for round pole installation(Figure 17)

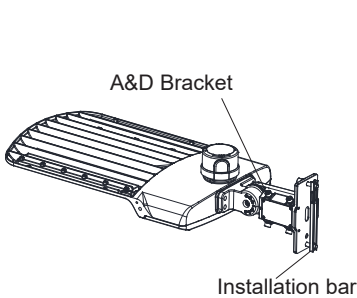


Figure 15

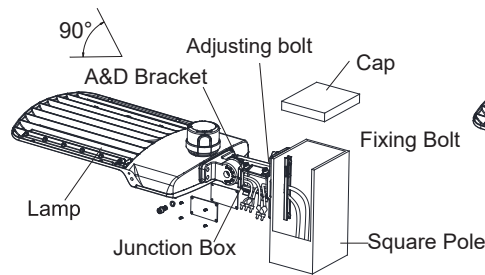


Figure 16

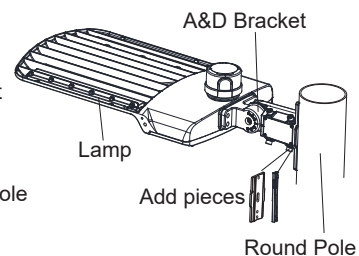


Figure 17

3. DIRECT MOUNTING (DM)

Step 1: Fix DM bracket to square pole with bolt, open the side lid of DM bracket, pull the wire into junction box, and connect the wire correctly. (Figure 18)

Step 2: Put the connected wire into the junction box, then cover the junction box.(Figure 19)

Notice: Adjustable angle is 0-35°(Figure 18).

Same as round pole installation, please remember to remove the silicon plate when install the fixture in round pole(Figure 20)

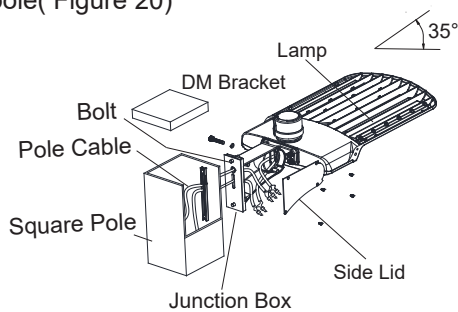


Figure 18




Figure 19




Figure 20

Installation

4. YOKE MOUNTING (YM)

Step 1: Drill holes on the wall as shown. (Figure 21)

Step 2: Knock the expansion bolts into the wall.(Figure 22)

Step 3: Connect the fixture to the bracket and tighten the screws; connect the wires properly and put them into junction box.(Figure 23)

Notice: Adjustable angle is 0-90°(Figure 23)




Figure 21




Figure 22




Figure 23

5. FLOOD MOUNTING (FM)

Install the mount to the fixture, tighten the mount and install the screws.(Figure 24)

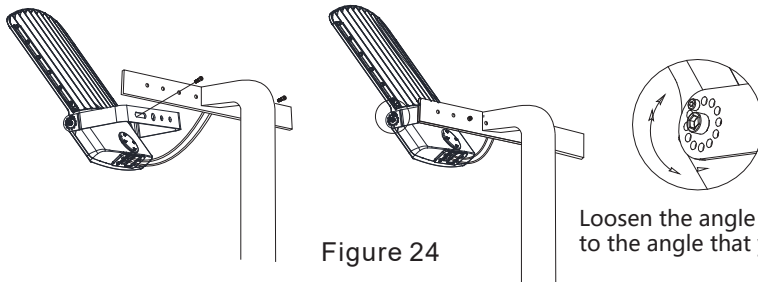


Figure 24

Loosen the angle to adjust the screw, after adjust to the angle that you need, then tighten the screws.

Instructions for Photocell

When the photocell function is required, photocell should be installed on the back of lamp; When it's not required, shorting cap should be installed on the back of lamp (Figure 25)

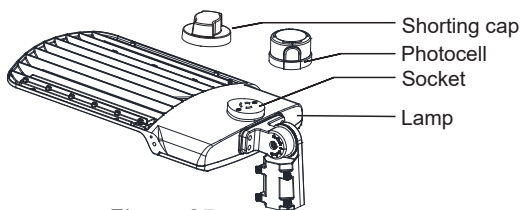


Figure 25

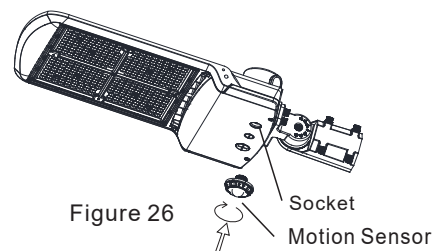


Figure 26

Standard wire:

L/live wire: Black\Brown;

N/null wire: White\Blue;

Ground wire: Green\Yellow-green.



Instructions for Motion Sensor

For products with motion sensor function, the induction module should be installed on the socket of the motion sensor.(Figure 26)

Installation

Instructions for Motion sensor (Figure 26)

Technical data	
Operating voltage	12±2V DC
Operating current	30mA
Output	DIM 0-10V
Stand-by power	<0.5W
Brightness	0%-100%/Quick setting:70%/80%/90%/100%
Sensitivity	20%/50%/75%/100%
Hold time	10s/1min/10min/30min
Daylight threshold	10Lux/30Lux/50Lux/100Lux/Disable
Stand-by time	1min/30min/60min/+∞
Stand-by dimming level	10%/20%/30%/50%
Microwave frequency	5.8GHz±75MHz
Microwave power	<0.5mW
Detection angle	150° (wall mounted) 360° (ceiling mounted)
Control line	Pink:+12V; Purple:DIM+; Gray:GND/DIM-
Mounting height	Max.15m(ceiling mounted)
Detection range	Max.∅15m(ceiling mounted) Max.20m(wall mounted)
Operating temperature	-30°C~+60°C
IP rating	IP20

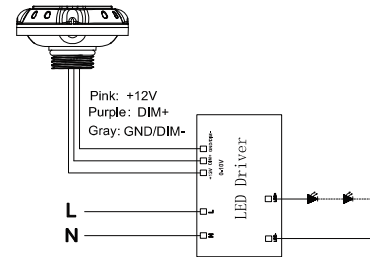

Note:

Default setting: Brightness:100%, Hold time:1min, Stand-by dimming level:20%, Stand-by time:1min, Sensitivity:100%, Daylight:Disable.

CCT Adjustment

1. Unscrew the 3/4 plug, as shown in the figure 27;
2. Adjust the switch to get the desired color temperature according to the content on the label;
3. Install and tighten the 3/4 plug;

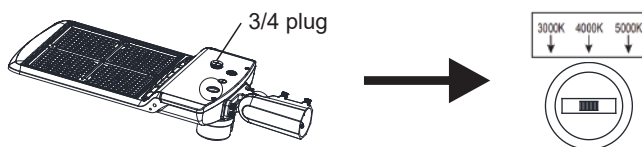


Figure 27

CCT Adjustment and Wattage adjustment Instruction

1. Unscrew the 3/4 plug, as shown in the figure 28;
2. Adjust the wattage switch or CCT switch to get the desired wattage or color temperature according to the label on the fixture
3. Install and tighten the 3/4 plug;



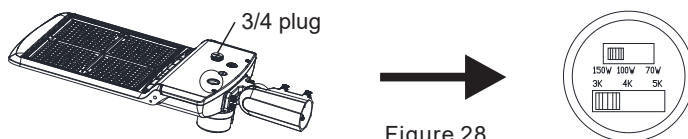


Figure 28

Installation

Instructions for PIR sensor (Figure 26)

Technical data	
Operating voltage	12±2V DC
Operating current	30mA
Output	DIM 0-10V
Stand-by power	<0.5W
Brightness	0%-100%/Quick setting:70%/80%/90%/100%
Sensitivity	20%/50%/75%/100%
Hold time	10s/1min/10min/30min
Daylight threshold	10Lux/30Lux/50Lux/100Lux/Disable
Stand-by time	1min/30min/60min/+∞
Stand-by dimming level	10%/20%/30%/50%
Detection angle	30-120°
Control line	Pink:+12V; Purple:DIM+; Gray:GND/DIM-
Mounting height	Max.6m(ceiling mounted)
Detection range	Max.ø 8m(ceiling mounted) Max.6m(wall mounted)
Operating temperature	-30°C~+60°C
IP rating	IP20



Note:

Default setting: Brightness:100%, Hold time:1min, Stand-by dimming level:20%, Stand-by time:1min, Sensitivity:100%, Daylight:Disable.

⚠ WARNING

NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 10seconds, Daylight sensor is 30lux, Dimming level: 30%,Dimming time: 60minutes.

NOTE: Any setting changed by DIP Switch or remote control, the led light that sensor connect will on/off as confirm.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CAUTION - RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR

MIN 75°C SUPPLY CONDUCTORS

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS

ATTENTION – RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS LES FILS D'ALIMENTATION 75 °C MIN

Notice For User


- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check Points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.

Packaging

SKU	Size (Inches)	Qty	Net Weight	Gross Weight
1560179	29.13 x 14.96 x 5.63	1	11.90 LBS	14.99 LBS
1560241	29.13 x 14.96 x 5.63	1	11.90 LBS	14.99 LBS
1560281	29.13 x 14.96 x 5.63	1	11.90 LBS	14.99 LBS

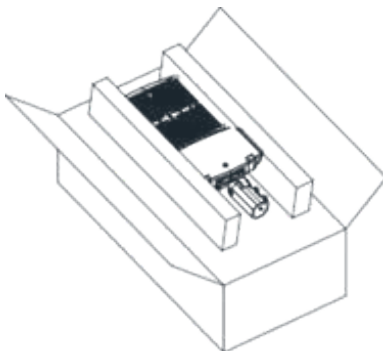

LED AREA LIGHT



Application Image



LED AREA LIGHT