



DATE	REV.	REVISION	DRAFTING	CHECKED
2019.05.16	A/0	NEW	PQ	ZCY

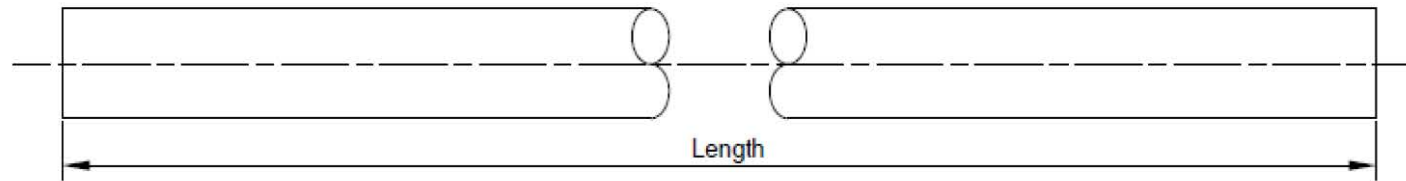

Marking: CAT.6 UTP (OUTDOOR USE) 23AWGX4P INSTALLATION CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-6-1 XXXXFT

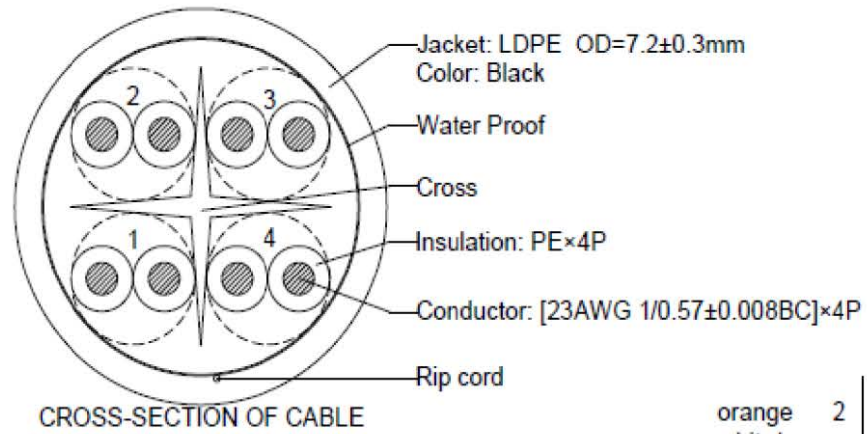

orange	2	green	3
white/orange		white/green	
blue	1	brown	4
white/blue		white/brown	

Parameter(20°C)

Item	Specified Value
Conductor resistance	≤74.5Ω/1000m
Rated Temperature	-20~75°C

Packing

Part No.	Color	Length (ft)	Wood axion	
			Size(cm)	
BC21010071SP	Black	1000	D37xH27	

PRIME®

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X'	±3
.X	±0.10	.X'	±0.3
.XX	±0.05		

DRAW. NO		TITLE	LAN CABLE Cat.6 U/UTP With Cross 23AWG×4P Solid Water-Blocking LDPE(outdoor) , 1000ft				
CUSTOMER		CUST' R P/N	BC21010071SP	DRAW	PQ	DATE	2019.05.16
SCALE		CHECK		DATE	2019.05.16		
UNIT	mm	APPROVED		SHEET			

Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other
----------	-------------	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------

