


MARKING: PRIME CAT.6A UTP PATCH ETL VERIFIED TO ANSI/TIA-568-C.2\*24AWGX4P CMX(UL) c(UL) E339722-W

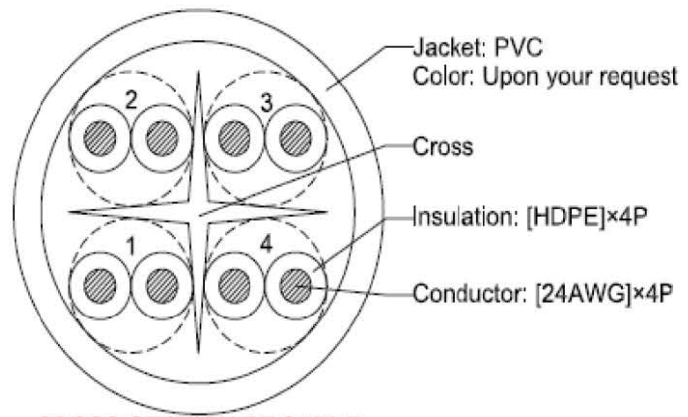

Parameter(20°C)

Item	Specified Value
Conductor resistance	≤98.5Ω/1000m
Operating Temperature	-20~60°C

Notes

Part No.	Length (ft)
PC3100751X*	1
PC3100752X*	2
PC3100753X*	3
PC3100755X*	5
PC3100757X*	7
PC3100758X*	10
PC3100759X*	15
PC3100761X*	25
PC3100763X*	50
PC3100764X*	75
PC3100765X*	100

X*	1	2	3	4	5	6	8	9
Color	Black	Blue	Green	Gray	Orange	Red	White	Yellow



Unless specified on the drawing, tolerances are per the follows: X. ±0.20    X° ±3 .X ±0.10    .X° ±0.3 .XX ±0.05	DRAW. NO		TITLE	PATCH CORD Cat.6A U/UTP With Cross 24AWG×4P PVC		
	CUSTOMER		DRAW	Jsy	DATE	2019.05.29
	CUST' R P/N		CHECK	YB	DATE	2019.05.29
	SCALE		UNIT	mm	APPROVED	CQ SHEET