




DATE	REV.	REVISION	DRAFTING	CHECKED
2019.06.06	A/0	NEW	MS	

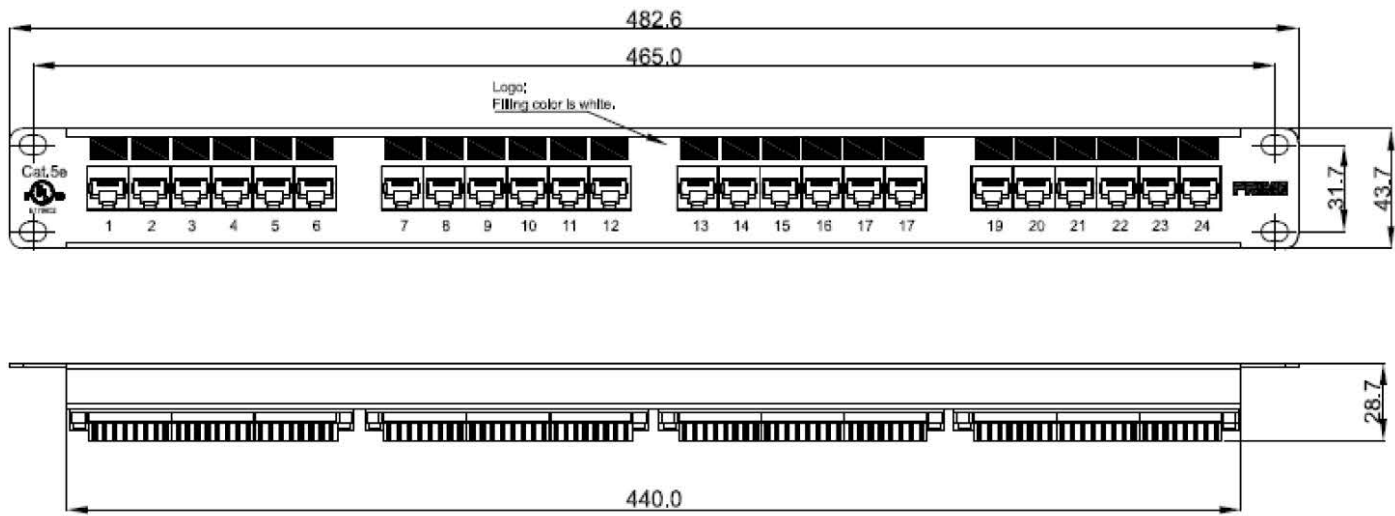

**PIN/PAIR ASSIGNMENTS**

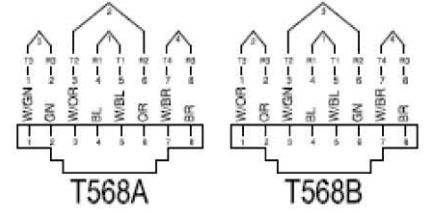

**SPECIFICATION**

- Patch Panel: 1U SECC/SGCC
- RJ45 Jack  
Housing: Plastic,  
Terminal: Phosphor Bronze, 50u" gold plated over Nickel plated in contact area.
- IDC  
Housing: Plastic,  
Terminal: Phosphor Bronze, nickel plated.
- P.C.B: FR-4, T=1.6mm.
- Operation Temperature : -10°C to 60°C.
- Insertion Force: 900gms for 8 contacts.
- Retention : 7.7 kg between jack and plug.
- Durability : 750 Cycles contact resistance test check with speed 10 mm/s.
- Supports: T568A & T568B wiring compatible with Category 6 requirement.

**ELECTRICAL**

- Current rating: 1.5 Amps
- Insulation resistance: 500 MΩ
- Contact resistance: 20 mΩ
- DC resistance: 0.1 Ω
- Dielectric withstanding voltage: 500 V

Unless specified on the drawing, tolerances are per the follows:  
 X. ±0.50 X' ±3  
 .X ±0.30 .X' ±0.3  
 .XX ±0.10



DRAW. NO	GFZD-S190075	TITLE	Cat. 5e Dual Type Patch Panel 24 port Rackmount		
CUSTOMER					
CUST' R P/N	PL11021971P	DRAW	MS	DATE	2019.06.06
SCALE	1:1	CHECK		DATE	
UNIT	mm	APPROVED		SHEET	1 OF 2

Material		Part Number		Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other	RD		
----------	--	-------------	--	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------	----	--	--