

Project		Catalog #		Type	
Prepared by		Notes		Date	



Sure-Lites

CX Series

Die-Cast Aluminum
Surface Mount LED Lamps
Exit Lighting

Typical Applications

Office • Education • Healthcare • Hospitality
• Retail • Industrial • Manufacturing

Interactive Menu

- Order Information page 2
- Product Warranty

Product Certification




Product Features



Top Product Features

- Dual voltage input 120/277 VAC, 60 Hz
- Die-cast aluminum housing
- Die-cast canopy included
- LED Lamping
- Labor savings self-diagnostics (CX7 only)

Dimensional Details

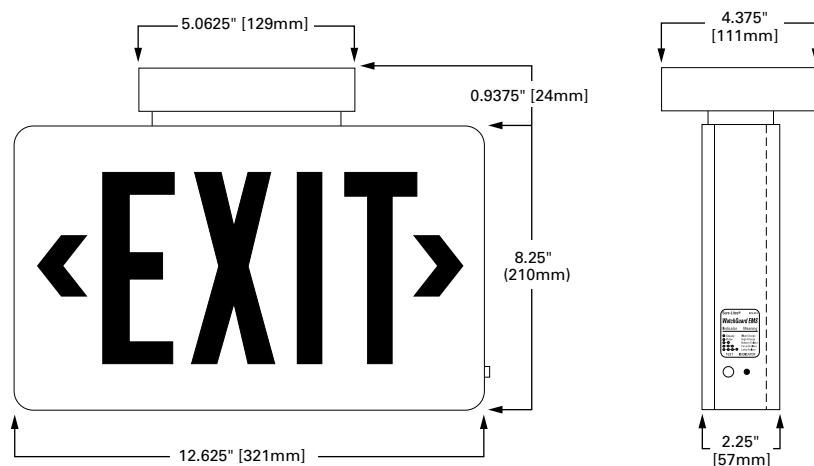

Ordering Information

SAMPLE ORDER NUMBER: **CX71SD, CX72WHSD, CX6SB7**

Family	Series	Face Options	Housing Finish	Options
CX =Die Cast Aluminum Exit, LED	6 =AC only	1=Single 2=Double S=Open Face for Signage ⁽¹⁾	Blank =Brushed Aluminum Face w/Black Housing WH =White BK =Black	Blank =No additional options 2C =Two Circuit Option (CX6 only)
		Notes (1) Consult factory for additional custom signage options.		

Family	Series	Face Options	Housing Finish	Options
CX =Die Cast Aluminum Exit, LED	7 =Self Powered	1=Single 2=Double S=Open Face for Signage ⁽¹⁾	Blank =Brushed Aluminum Face w/Black Housing WH =White BK =Black	Blank =No additional options SD =Self-diagnostics (standard) with Fire Alarm Interface Capability (CX7 only) ⁽²⁾
		Notes (1) Consult factory for additional custom signage options.		Notes (2) Blue Letters, White LED does not have the "SD" option.

Options for non-EXIT signs

Signage Options (Color)	Signage Options (Common Signs)
Blank =EXIT sign R =Red letter, Red LED G =Green letter, Green LED B =Blue letter, White LED (Non-SD Only)	Blank =EXIT sign 1 = "AREA OF RESCUE" 2 = "SALIDA" 3 = "STAIRS" 4 = "AREA OF REFUGE" 5 = "IN USE" 6 = "NOT AN EXIT" 7 = "(WHEEL CHAIR SYMBOL) 8 = "X-RAY ON" 9 = "LASER IN USE" 10 = "DO NOT ENTER"

Available Accessories (Order Separately)

Protection Devices	Pendant Kit
WG10 =Wall mount wire guard WGS11 =Ceiling or End mount wire guard VS1 =Polycarbonate Vandal Shield VS1WP =Polycarbonate Vandal Shield, Weather Proof	CAX18PKWH =18" Pendant Kit, White CAX18PKBK =18" Pendant Kit, Black CAX18PKHTWH =18" Hang True Pendant Kit, White

Product Specifications

Electrical

- General Features**
- Field selected red and green sign capability standard on all units (units shipped red, field convert to green with supplied parts)
- Dual Voltage Input 120/277 VAC,60Hz
- AC Only**
- Optional 2C (Two circuit, FTBR) available in 120/277 VAC in standard and emergency operation
- Self Powered**
- Sure-Lites EZ Key patented external battery disconnect feature – prevents unnecessary battery drainage, saves on installation time
- Solid-state Voltage Limited Charger
- Brownout Circuit
- Low-Voltage Disconnect
- Test Switch/Power Indicator Light
- Standard 24 hour recharge time (max)
- Self-Diagnostic feature Self-Diagnostics standard for CX7 self-powered series

Housing Construction

- Die cast aluminum housing
- Die cast canopy included (for mounting convenience only)
- no electrical components in canopy)
- Universal pattern knockouts on
- rear of single face housing for direct mounting to junction box
- Knockout provided on housing for surface attachment
- Exit can be universally mounted: ceiling, wall or end
- Choice of three finishes: black housing with brushed aluminum face, white housing with white face or black housing with black face
- NFPA 101 compliant knockout chevrons allow quick conversion to directional signs
- Single and double faced signs available, order separately

Code Compliance

- UL 924 Listed
- UL Damp Location (0-40° C)
- Life Safety NFPA 101
- NEC/OSHA
- Most State and Local Codes
- Suitable for Floor Proximity Installation
- UL Listed for 2C (FTBR)

Lamp Data

- AC LED: Red and green LED lamps provide uniform diffused illumination
- DC: Red and green LED DC lamps (Brighter in emergency mode)

Warranty

- Exit – 5 year
- Battery: 7-Year pro-rata

Technical Data

Lamps

- CX Series Exits use energy efficient, long life LED's to provide uniform diffuse illumination of the exit face. These red and green LEDs require no maintenance and consume less than one watt, on average.

Housing Construction

- Die cast aluminum with Brushed Aluminum face and black trim standard. Optional finishes include White and Black. NFPA 101 compliant knockout chevrons for easy conversion to directional sign. Universal pattern knockouts are in the back of the single face housing for direct mounting to junction box. Die cast aluminum alloy canopy included for universal mounting. Canopy is included for mounting convenience only—no electrical components in canopy.

Lenses

- Lenses for the CX Series Exits are made from durable, impact resistant polycarbonate. All exit faces are designed with full 3/4" stroke snap-out or snap-in chevron directional indicators to insure maximum visibility and compliance with the latest codes. Units come with red lenses installed and green lenses included for field selectable red or green signs.

Sure-Lites EZ Key External Battery Disconnect (Self Powered Only)

- Patented technology that allows installers to externally control the battery connection. Better than line latching, allows installers to choose when the battery is connected so that it stays fresh longer. Allows battery to be disconnected after installation but before building is occupied, enabling emergency circuit to be shut down for power savings.

Brownout Circuit (Self Powered Only)

- The brownout circuit on Sure-Lites' exits monitors the flow of AC current to the exit and activates the emergency lighting system when a predetermined reduction of AC power occurs. This dip in voltage will cause most ballasted fixtures to extinguish causing loss of normal lighting even though a total power failure has not occurred.

Solid-State Transfer (Self Powered Only)

- The CX Series Exit incorporates solid-state switching which eliminates corroded and pitted contacts or mechanical failures associated with relays. The switching circuit is designed to detect a loss of AC voltage and automatically energizes the lamps using DC power. Upon restoration of AC power, the DC power will be disconnected and the charger will automatically recharge the battery.

Low Voltage Disconnect (Self Powered Only)

- When the battery's terminal voltage falls, the low-voltage circuitry disconnects the lighting load. The disconnect remains in effect until normal utility power is restored, preventing deep battery discharge.

Test Switch/Power Indicator Light (Self Powered Only)

- A test switch located on the side of the exit permits the activation of the emergency circuit for a complete operational systems check. The Power Indicator Light provides visual assurance that the AC power is on.

Sealed Nickel Cadmium Battery (Self Powered Only)

- Sure-Lites sealed nickel cadmium batteries are maintenance-free with a life expectancy of 15 years. The sealed rechargeable nickel cadmium battery offers high discharge rates and stable performance over a wide range of temperatures, from 0-40° C. The specially designed re-sealable vent automatically controls cell pressure, assuring safety and reliability. This battery is best suited for harsh ambient temperatures because the electrolyte is not active in the electrochemical process.

"2C" (AC Only)

- The "2C" Option enables the Exits to operate per the requirements of UL 924 when connected simultaneously to both normal and emergency power circuits (two circuit operation—UL Category FTBR—Emergency Lighting and Power Equipment). The "2C" Option alters the standard Exit such that it complies with and is UL Listed under the FTBR Category. This option should only be used for exits which are intended to be connected simultaneously to normal and emergency power circuits, but cannot support two hot inputs. Only one of the normal or emergency circuits can be powered. If both are powered simultaneously, it will make the Exit inoperable. Both circuits have universal 120/277 VAC standard.

Self Diagnostics Option (Self Powered Only)

- The self-diagnostic unit will automatically perform all tests required by UL924, and NFPA 101. The system indicates the status of the exit at all times using the LED indicator near the test switch on the side of the unit. A 90 minute battery power (emergency mode) simulation test will occur randomly once every 12 months. A 30 second battery power simulation test will occur every 30 days.

Photocell Test Switch

- Allows verification of proper operation of the transfer circuit and emergency lamps with a laser pointer (laser is sold as an accessory). The emergency lamps will test for 30 seconds when activated.



Laser tester

Part Number = LASER
(sold separately)

Warranty

- All Sure-Lites' products are backed by a firm five-year warranty against defects in material and workmanship. Maintenance-free, long-life, sealed nickel cadmium batteries carry a seven-year pro-rata warranty.

Energy and Performance Data

Maximum power consumption under all charge conditions:

AC Only, 120V - Red

Amps:	Watts:	Power Factor:
0.07	0.98	0.12

AC Only, 277V - Red

Amps:	Watts:	Power Factor:
0.07	1.04	0.06

Self Powered, 120V - Red

Amps:	Watts:	Power Factor:
0.07	0.98	0.12

Self Powered, 277V - Red

Amps:	Watts:	Power Factor:
0.07	1.03	0.06

AC Only, 120V - Green

Amps:	Watts:	Power Factor:
0.07	1.02	0.13

AC Only, 277V - Green

Amps:	Watts:	Power Factor:
0.07	1.12	0.06

Self Powered, 120V - Green

Amps:	Watts:	Power Factor:
0.07	1.00	0.13

Self Powered, 277V - Green

Amps:	Watts:	Power Factor:
0.07	1.09	0.05