

ZANUSSI PROFESSIONAL

Modular Cooking Range Line EVO900 6 Drawer Refrigerated Base (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		
NIA π		



392600 (Z9TTBECOMKN)

Refrigerated base with 6 drawers, -2/+10 C - R290

Short Form Specification

<u>Item No.</u>

Refrigerated base with 6 drawers. Built-in refrigerator compressor unit. Can operate over the temperature range of -2°C to 10 °C. Exterior panels in stainless steel. To be installed below other EVO900 top units. Delivered with 50 mm height adjustable feet.

Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Unit can be easily installed below other 900 line top models.
- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.
- CFC and HCFC free (highly ecological refrigerant type: R290).

Construction

- · Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.


Optional Accessories


Flanged feet kit	PNC 206136 □
 Frontal kicking strip for concrete installation, 1600 mm 	PNC 206152 □
• Frontal kicking strip, 1600 mm	PNC 206179 □
 Kit 3 base support for feet or wheels for refrigerated base or freezer base 	PNC 206430 □
Kit 6 wheels - 3 swivelling with brake	PNC 206432

AΡ	۲	K	U	V	٩L




Modular Cooking Range Line EVO900 6 Drawer Refrigerated Base (R290)





D = Drain

El = Electrical inlet (power)

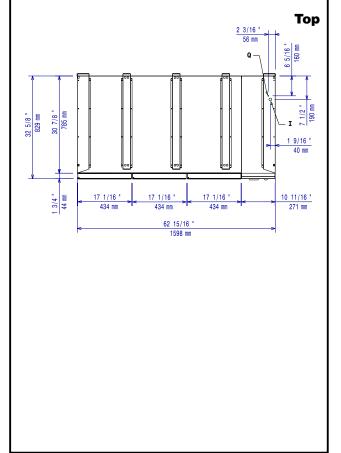

Electric

Supply voltage:

392600 (Z9TTBECOMKN) 220-230 V/1N ph/50 Hz

Electrical power max.: 0.44 kW
Total Watts: 0.44 kW

Key Information:

Gross capacity: 225 It **External dimensions, Width:** 1600 mm **External dimensions, Height:** 600 mm **External dimensions, Depth:** 830 mm Net weight: 110 kg **Shipping weight:** 168 kg Shipping height: 840 mm Shipping width: 1070 mm Shipping depth: 1700 mm Shipping volume: 1.53 m³

Refrigeration Data

Refrigerant type: R290 Refrigerant weight: 85 g

