

## Three Glass Swing Door BackBar

**Range:** BackBar  
**SKOPE ID:** BB003  
**Dimensions:** 2040mm (W) × 590mm (D) × 1025mm (H)\*  
**Capacity:** 635L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with castors is adjustable from 1015 to 1030.



A glass door under-bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 0°C to 5°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated-glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

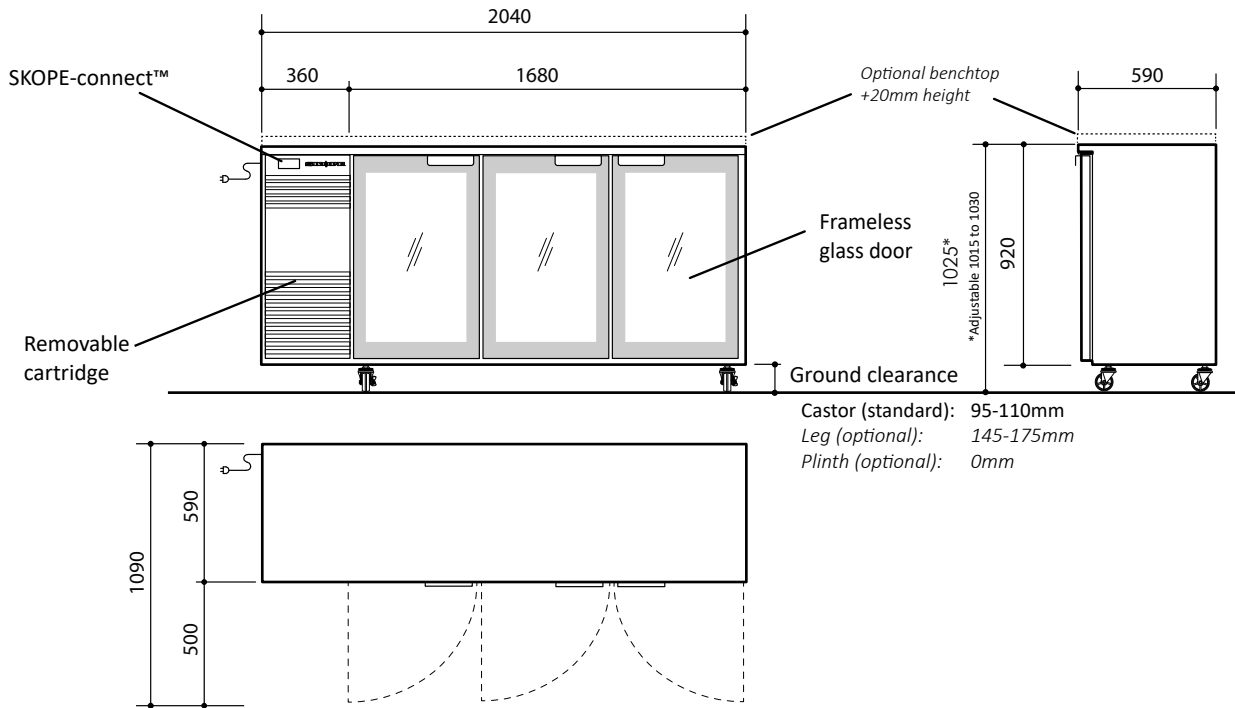

### Cabinet

<b>Type</b>	BackBar
<b>Finish</b>	Powdercoat galvanised steel or stainless steel
<b>Insulation</b>	Type PU foam
	Thickness (mm) 50
	Blowing Agent Cyclo-iso Pentane (C5H10/C5H12)
<b>Doors</b>	Type Glass swing door (double-glazed, low-e, argon-filled)
	Height (mm) 730
	Opening Size Width (mm) 460
<b>Shelving</b>	Six adjustable height, plastic-coated wire shelves 4 × outer shelf (497W × 440L), 2 × inner shelf (555W × 440L)
<b>Lighting*</b>	1 × 24W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	2040	1580	TBC
<b>Depth (mm)</b>	590	530	TBC
<b>Height (mm)</b>	1025 (std. castors)	758	TBC
	920 (plinth mount)		
<b>Weight (kg)</b>	220	TBC	
<b>Capacity (L)</b>	635		
<b>Footprint (m<sup>2</sup>)</b>	1.2		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

### Product Loading

	330ml can	600ml bottle
<b>Facing</b>	44	42
<b>Loading</b>	264	252

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

### Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)
<b>Rated Ambient Temperature</b>	32°C/65% relative humidity
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	Standard <66
	Hush Mode* <62
<b>Greenhouse and Energy Minimum Standards (GEMS)</b>	
<b>Star Rating</b>	9
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	2.81 kWh/24h
<b>Annual Running Costs</b>	\$307.70 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	1.9m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	2.2

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	24
<b>Refrigerant/Charge</b>	R290/81g
<b>Nominal Capacity (W)</b>	650
<b>Heat Rejection (W)</b>	Average 120 Peak 150
<b>Remote Duty</b>	n.a.
<b>Defrost Type</b>	Off-cycle
<b>Drainage</b>	No plumbing required



BB.3.GSW  
on the SKOPE website

