

## Three Glass Swing Door CounterLine

**Range:** BackBar

**SKOPE ID:** CL003

**Dimensions:** 2190mm (W) × 680mm (D) × 830mm (H)\*

**Capacity:** 533L

\* Height with castors is adjustable from 820 to 835.

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A glass door under-counter bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**




**Natural Refrigerant**



**GEMS**



**SKOPE-connect**

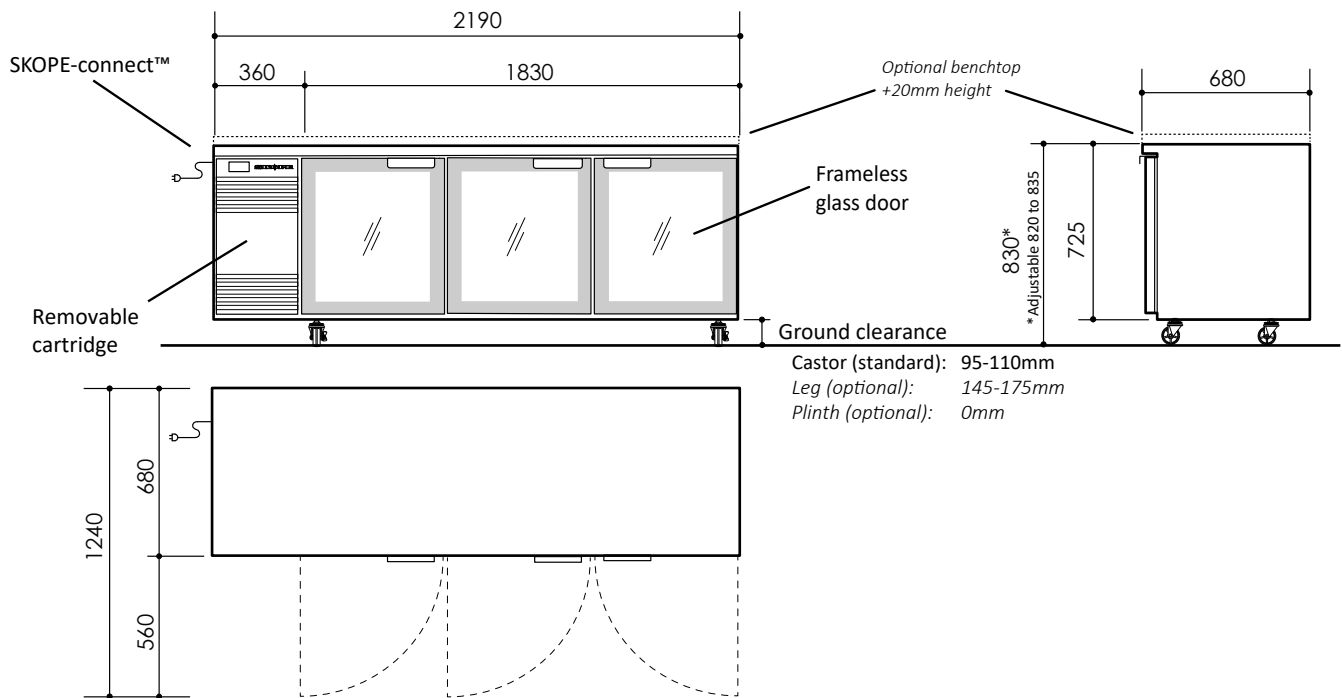

## Cabinet

Type	CounterLine		
Finish	Powdercoat galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso Pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	538
		Width (mm)	511
Shelving	Six adjustable height, plastic-coated wire shelves		
	2 × inner shelf (547W × 530L), 4 × outer shelf (605W × 530L)		
Lighting*	1 × 24W, cool white (5500-6500K) LED strip on cabinet ceiling		

## Dimensions†

	External	Internal	Packed
Width (mm)	2190	1730	TBC
Depth (mm)	680	565	TBC
Height (mm)	830 (std. castors)	545	TBC
	725 (plinth mount)		
Weight (kg)	232		TBC
Capacity (L)	533		
Footprint (m²)	1.49		

## Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

## Product Loading

Facing	330ml can	52	600ml bottle	46
Loading	330ml can	416	600ml bottle	322

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

## Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Rated Ambient Temperature	32°C/65% relative humidity	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	<66
	Hush Mode*	<62

## Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	9
Product Temperature Class	M1 (-1 to 5°C)
Total Energy Consumption	2.5 kWh/24h
Annual Running Costs	\$274 (@ \$0.30/kWh)

## Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply
Cord	1.9m power cord with 3-pin, 10 amp plug
Current draw (A)	2.6

## Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)			
System Type	Removable cartridge			
Cartridge Weight (kg)	24			
Refrigerant/Charge	R290/81g			
Nominal Capacity (W)	650			
Heat Rejection (W)	Average	105	Peak	130
Remote Duty	n.a.			
Defrost Type	Off-cycle			
Drainage	No plumbing required			



CL.3.GSW  
on the SKOPE website