

# HTYA615

Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 e 500x500 mm
Panel	Easyline 2016
Filter	5-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	420 mm
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Product dimensions WxDxH	716x760x1520 mm



## Distribution

Solutions	Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools
-----------	--

## Aesthetics

Serie	Easyline	Led color	Green
Control panel	Electronic		

## Functions



Functionality	Euronorm trays washing; GN 1/1 trays washing; 5- stage filter; HTR; Door clearance 420mm
---------------	---

## Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle

## Program specifications

Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-2'; Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C-4'; Boiler 85°C / Tank 60°C - 1'
Drain and self cleaning cycle
Maximum basket/hour
Maximum dishes/hour

## Interface

Display	8 digit	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes
Detergent missing alert	Yes		

## Construction

Tank	Deep drawn	Hood	Double wall
Construction	Double wall	Tank capacity	22 l
Tank material	Stainless steel AISI 304	Boiler capacity	8 l
Back panel	St/steel	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	Stainless steel	Net weight	138,000 kg
Rinse spray arm	Stainless steel	Drain max. height	1000 mm

## Technical Features

Tank heating element	2200 W	Water inlet	8°C
Boiler heating element	9000 W	Max temperature inlet water	60°C
Washing pump	730 W	Max water hardness	12°f - 7°dH
Default connection	9730 W	Water inlet	Cold 15°C
Water cycle consumption	3,2 l		

## Electrical Connection

Plug	Not present	Electrical connection option	230 V~ / 31 A / 7,0 kW / 50 Hz
------	-------------	------------------------------	--------------------------------


## Equipments

Drain pump	Yes	Rinse load	Yes, manual
Peristaltic detergent doser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid doser	Yes, electronic control	Break tank	Yes
Chemicals level probe	Yes, optional KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Si

Default chemicals dosing unit of measure	gr/lt	Trays/basket washing option 600x400	Yes
Boiler thermostop	Yes default ON	Trays washing option GN1/1 530x325mm	Yes
Soft Start	Yes	Water supply pipe diameter	16 mm
Stand-by system	Yes	Drain supply pipe diameter	21,5 mm
Automatic start	Yes, default OFF	Peristaltic detergent doser	Yes, manual
Detergent load	Yes, manual	Peristaltic detergent doser	Yes, manual

## Accessories Included

Dish basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

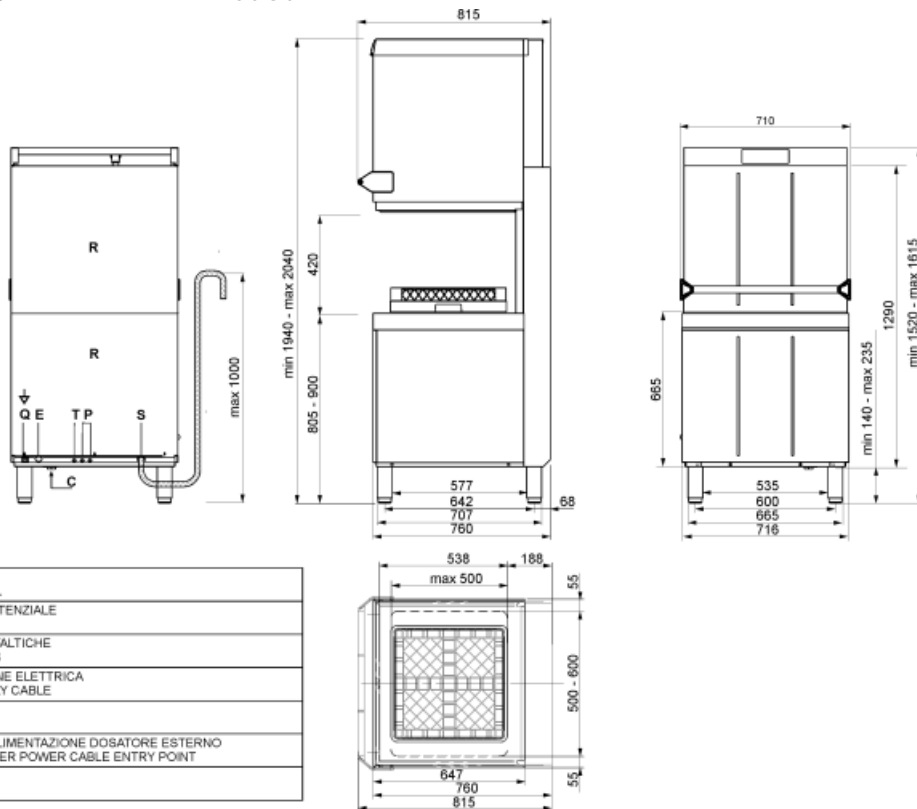

## Not included accessories

---



**WH00S01**

Wire insert for 12 small dishes



**PHOOS01**

Single basket in polypropylene for cutlery



**PHOOS02**

Basket in polypropylene for cutlery with 6 compartments

## Symbols glossary (TT)

---

