

HTYA615

Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 e 500x500 mm
Panel	Easyline 2016
Filter	5-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	420 mm
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Product dimensions WxDxH	716x760x1520 mm



Distribution

Solutions	Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools
-----------	--

Aesthetics

Serie	Easyline	Led color	Green
Control panel	Electronic		

Functions



Functionality	Euronorm trays washing; GN 1/1 trays washing; 5- stage filter; HTR; Door clearance 420mm
---------------	---

Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle

Program specifications

Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-2'; Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C-4'; Boiler 85°C / Tank 60°C - 1'
Drain and self cleaning cycle
Maximum basket/hour
Maximum dishes/hour

Interface

Display	8 digit	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes
Detergent missing alert	Yes		

Construction

Tank	Deep drawn	Hood	Double wall
Construction	Double wall	Tank capacity	22 l
Tank material	Stainless steel AISI 304	Boiler capacity	8 l
Back panel	St/steel	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	Stainless steel	Net weight	138,000 kg
Rinse spray arm	Stainless steel	Drain max. height	1000 mm

Technical Features

Tank heating element	2200 W	Water inlet	8°C
Boiler heating element	9000 W	Max temperature inlet water	60°C
Washing pump	730 W	Max water hardness	12°f - 7°dH
Default connection	9730 W	Water inlet	Cold 15°C
Water cycle consumption	3,2 l		

Electrical Connection

Plug	Not present	Electrical connection option	230 V~ / 31 A / 7,0 kW / 50 Hz
------	-------------	------------------------------	--------------------------------


Equipments

Drain pump	Yes	Rinse load	Yes, manual
Peristaltic detergent doser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid doser	Yes, electronic control	Break tank	Yes
Chemicals level probe	Yes, optional KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Si

Default chemicals dosing unit of measure	gr/lt	Trays/basket washing option 600x400	Yes
Boiler thermostop	Yes default ON	Trays washing option GN1/1 530x325mm	Yes
Soft Start	Yes	Water supply pipe diameter	16 mm
Stand-by system	Yes	Drain supply pipe diameter	21,5 mm
Automatic start	Yes, default OFF	Peristaltic detergent doser	Yes, manual
Detergent load	Yes, manual	Peristaltic detergent doser	Yes, manual

Accessories Included

Dish basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

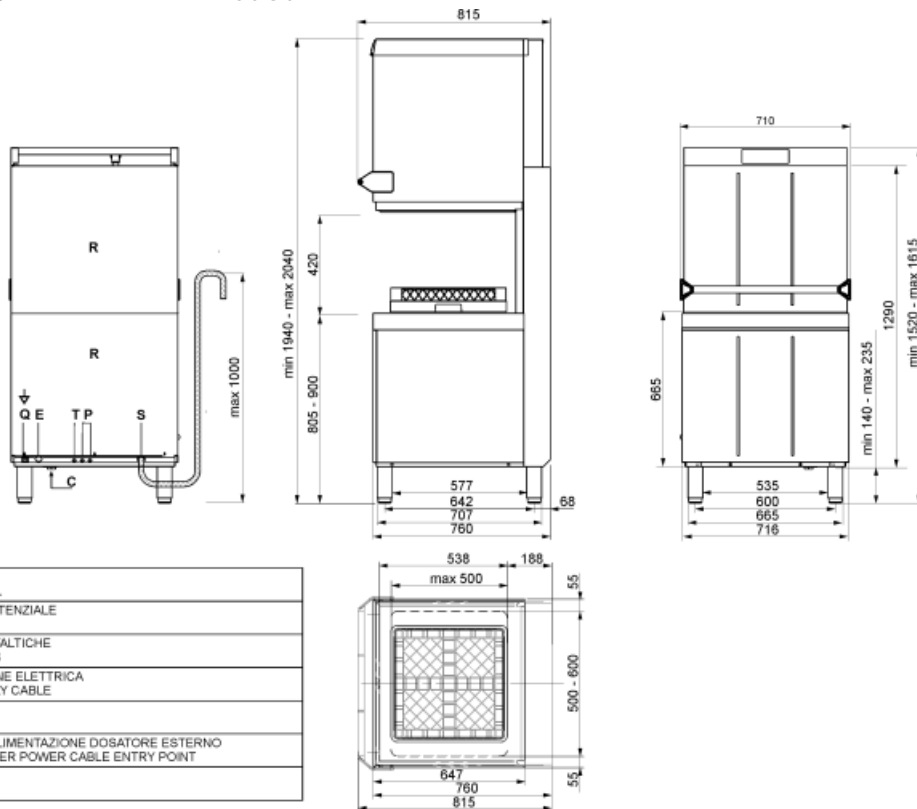

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



WH00S01

Wire insert for 12 small dishes



PHOOS01

Single basket in polypropylene for cutlery



PHOOS02

Basket in polypropylene for cutlery with 6 compartments

Symbols glossary (TT)

