

# TRANSFORMERS




## DESCRIPTION

The Brilliance Transformer features a high-quality, stainless steel case and includes multi taps to accommodate voltage drop. Available in 75, 150, 300, and 600 watts, these transformers are sure to support any size of project.

Pair with the Smart Socket 3.0 (sold separately) for astronomical timing via the Brilliance Smart app.

Create up to four zones on a single transformer with up to 200 Watts per sector with the award-winning Sector Selector (sold separately).

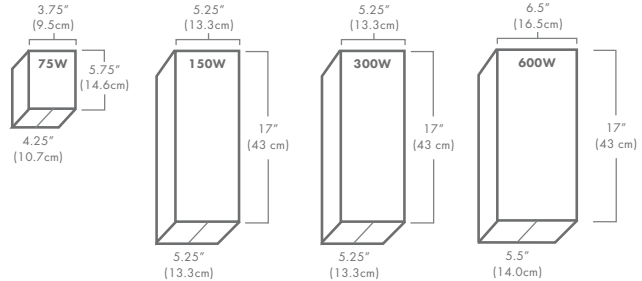

Part Number:

**BRI-XFORMER-XXX**

Wattage

## FEATURES

- UL 1838 Certified
- Secondary circuit breaker
- Two knockout sizes for conduit
- Removable bottom & 4ft Grounded plug
- Canted terminal block for easy access



75W



150W



300W



600W



**BRI-XFORMER-300**

**TRANSFORMER SPECS**

Wattage	<b>75</b>	<b>150</b>	<b>300</b>	<b>600</b>
Finish	<b>Stainless Steel</b>	<b>Stainless Steel</b>	<b>Stainless Steel</b>	<b>Stainless Steel</b>
Photocell/Timer	<b>Included</b>	<b>Compatible</b>	<b>Compatible</b>	<b>Compatible</b>
Secondary Circuit Breaker	<b>Red</b>	<b>Orange</b>	<b>White</b>	<b>Circuit #1 &amp; Circuit #2, White</b>
Multi Tap	<b>12V, 15V</b>	<b>12V, 13V, 14V, 15V</b>	<b>12V, 13V, 14V, 15V</b>	<b>12V, 14V, 16V, 18V, 20V, 22V</b>
Dimensions (in.)	<b>3.75 x 5.75 x 4.25</b>	<b>5.25 x 17 x 5.25</b>	<b>5.25 x 17 x 5.25</b>	<b>6.5 x 17 x 5.5</b>
Dimmable	<b>On Primary Side</b>	<b>On Primary Side</b>	<b>On Primary Side</b>	<b>On Primary Side</b>
Warranty	<b>Lifetime</b>	<b>Lifetime</b>	<b>Lifetime</b>	<b>Lifetime</b>

**TECHNICAL REQUIREMENTS:** Design and plan lighting systems with volt amps in mind. Use the Brilliance Volt Amps chart to estimate the total draw on the system and choose the appropriate size of transformer accordingly.