



5CCT Slim Round Downlights



Date:..... Location:

Product:.....Project:.....

Quantity:..... Catalog#

FEATURES

- 4in 6in 5CCT Slim Downlights.
- Eliminate the need for recessed cans and junction boxes
- Snap-in mounting springs
- Shatter-resistant, low-glare lens
- 120V Triac dimming

SUITABLE APPLICATIONS

- Office Lighting
- Meeting room lighting
- Store lighting
- Restaurant lighting



CONSTRUCTION:

Aluminum alloy housing, Steel-encased, separated LED driver

ELECTRICAL:

120V input. PF ≥ 0.9 Flicker Free. -20°C to 45°C.

OPTICAL SYSTEM:

Super Bright 2835 LEDs. High Transmission PC cover. 120° beam angle.

INSTALLATION & MOUNTING:

Different open hole size by flash mounting with clips for easy installation.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.


PERFORMANCE

Model NO	PFC	Wattage	dimmable	Size	Voltage/Current Input	Light Efficiency	Tunable CCT
					120V		
LS-4EJCT09SR05	>0.9	9W	120V Triac dimming	4inch	0.29A	80LM/W	27K/30K/35K/40K/50K
LS-6EJCT12SR05	>0.9	12W	120V Triac dimming	6inch	0.45A	80LM/W	27K/30K/35K/40K/50K


5CCT Slim Round Downlights

Electric Characteristic


Specification/Model	LS-4EJCT09SR05	LS-6EJCT12SR05
LED Driver	UL Driver	
Input power	9W	12W
Lumens output	720LM	960LM
Efficiency	80LM/W	80LM/W
CRI	>90	>90
Color Temperature	27K/30K/35K/40K/50K	
Input voltage	120AC	120AC
Light distribution type	120D	120D
Working temperature	-20+45°C	-20+45°C
Junction temperature	<75°C	<75°C
lamps efficiency	≥90%	≥90%
Certificate	ENERGY STAR ETL cETL	
Equivalent	18-27W MH/HPS	27-36W MH/HPS

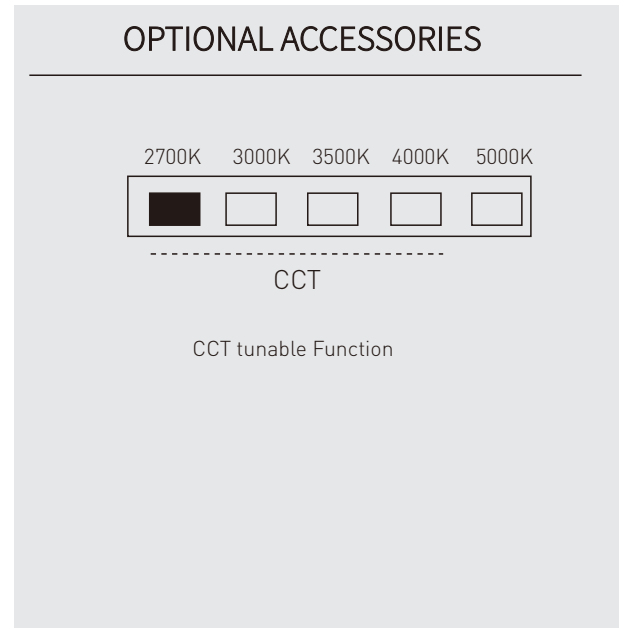

DIMENSION

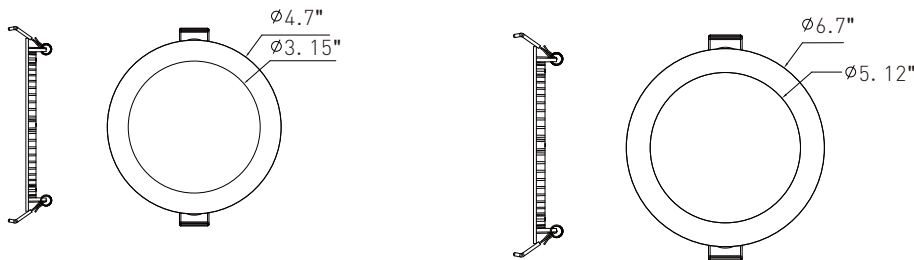

DISTRIBUTION DIAGRAM

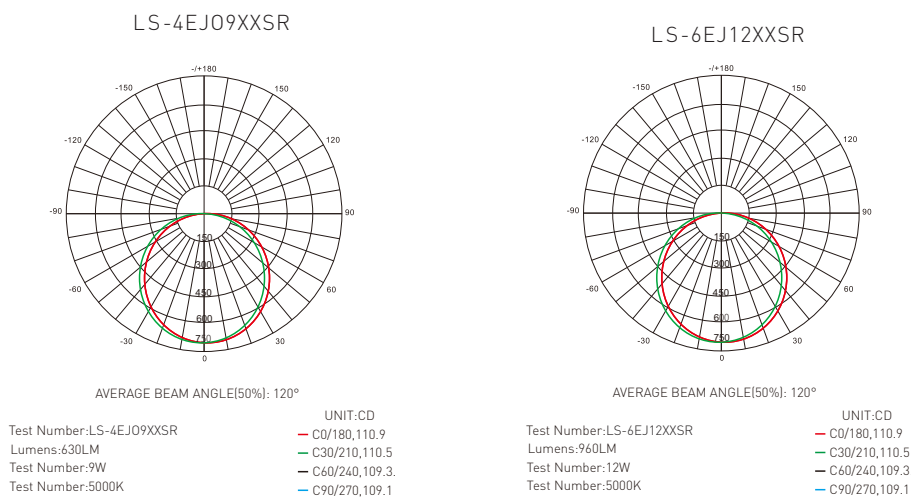

5CCT Slim Round Downlights

Installation Steps:

STEP1:

Turn off the power before installation. Remove the existing bulb and if necessary remove the existing trim. Open the hole on the mounting surface according to the size of fixture.

Fixture Size	3"	4"	6"	8"	12"
Hole size	2 63/64 inches	4 21/64 inches	6 19/64 inches	8 5/64 inches	11 1/32 inches




Fig1

STEP2:

Open the junction box, connect the power cable, as shown in Fig 2.




Fig2

- 3 IN 1**
- 3000K
 - 4000K
 - 5000K
- 5 IN 1**
- 2700K
 - 3000K
 - 3500K
 - 4000K
 - 5000K

STEP3:

Connect the fixture with power cable and the junction box, as shown in Fig3.




Fig3

STEP4:

Install the fixture to ceiling surface, as shown in Fig4.




Fig4

STEP5:

Turn on the power after installation, check the fixture can work well, as shown in Fig5.




Fig5