



# INSTRUCTION GUIDE

## Residential Multi-Purpose Light

Model No.SLDMP008-610-PIR

### PACKAGE CONTENTS

- 1 x Light Fitting
- 1 x Solar Panel
- 1 x Wall Mount & Bracket
- 1 x Pack of Screws
- 1 x Remote




### FEATURES

1. Remote controlled sensor modes
2. Sensor Triggered Piezoelectric alarm
3. 6-8 hours Operation per day
4. Pyro-electric Infrared Sensor

### INSTALLATION METHOD

1. Remove contents from packaging
2. Refer to **FIGURE 1** below for the location of your concealed on/off power button. To activate the light use the supplied pin and press & hold for 2 seconds to turn **"ON/OFF"**



*(Please note; your light is sent with the power button in the "OFF" position)*

**FIGURE 1**

### ASSEMBLY & INSTALLATION

**Light Fitting** – With the supplied screws, fix the wall mount to the wall. Connect light fitting to the bracket & connect to the wall mount by sliding into the back of the bracket

**Solar Panel** - Using the supplied screws, fasten your solar panel to the wall (Note; make sure the length from the light fitting is within 3m so the cable can reach). Place in a location that receives maximum direct sunlight throughout the day


### IMPORTANT NOTES

- **Please ensure you place your solar panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified
- It's best not to install the fitting under a street light, porch light or similar as this may stop the automatic day-night sensor triggering and result in your lights not turning on

### TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	Charge the light in direct sunlight for 1-2 days then check again
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel
	Battery Failure	1. Access the light and & replace battery 2. Battery has matured	Contact SLD Customer Service to buy new batteries

### UNDERSTANDING YOUR REMOTE

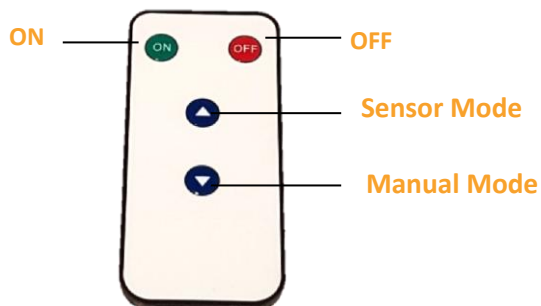

**ON** Press once to switch light **"ON"**

Once the alarm has beeped once, this is now in Sensor mode. A dull light will be emitted when no movement is detected. Once the sensor is triggered the light turns to 100% brightness for approximately 20 seconds

**OFF** Press once to switch light completely **"OFF"**

----- **OR** -----

**ON** Press twice to switch the alarm feature **"ON"**

Alarm will beep twice & take approximately 20 seconds to set, once set you will hear a long beep to confirm. Light will operate as per the previous option, however once the sensor is triggered both the brighter lights & alarm will operate together for approximately 20 seconds

**OFF** Press once to switch the alarm feature **"OFF"**