


P1&P2: M-646A
 P3: M-SR981A
 P4: M-386A

Customer No: NO.1

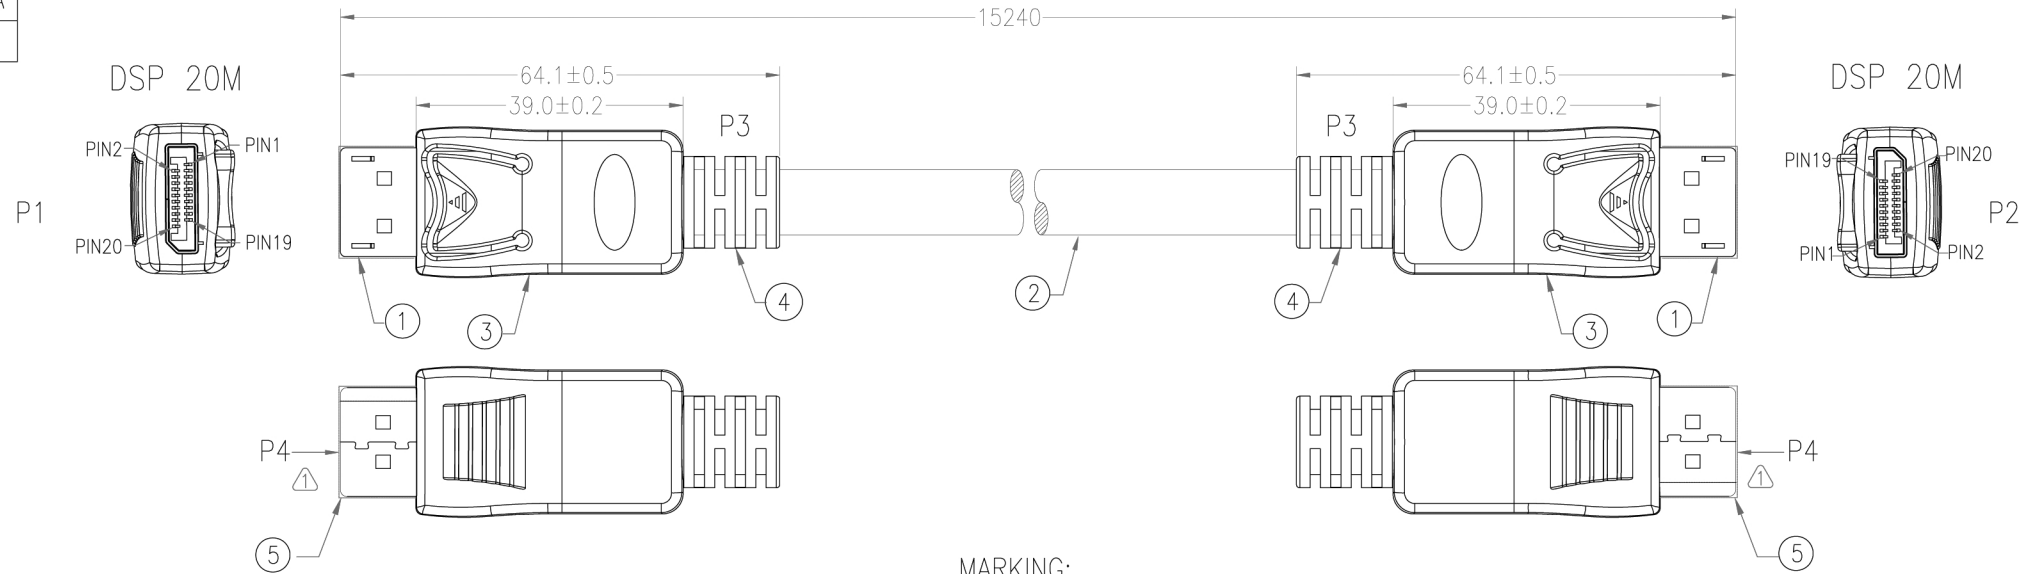

MARKING:

E300060 ㄨ AWM 20276 80°C 30V VW-1 CSA 204790
 AWM I/II A 80°C 30V FT1 MSL DisplayPort Cable

NOTE: All relevant materials are complied with RoHS directive.

9E79-14

P1	P2
1	12 RED
3	10 WHITE
2	11 SHIELD
4	9 GREEN
6	7 WHITE
5	8 SHIELD
7	6 BLUE
9	4 WHITE
8	5 SHIELD
10	3 BROWN
12	1 WHITE
11	2 SHIELD
13	13 WHITE
14	14 RED
15	15 BLACK
17	17 WHITE
16	16 SHIELD
18	18 YELLOW
19	19 PURPLE
SHIELD	SHIELD

5	MOLDED PVC COLOR TRANSPARENT	H1RB01-0304T01		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	BLACK HEAT SHRINK TUBE ϕ 2.5*8mm	A4HA39-0959	5	M959
	BLACK HEAT SHRINK TUBE ϕ 0.8*6mm	A4HA08-0959	5	M959
	BLACK HEAT SHRINK TUBE ϕ 0.8*20mm	A4HA08-0959	5	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	DISPLAYPORT 20PIN PLASTIC HOOD BLACK	A4FK33-0854	2set	M854
2	UL20276 DISPLAYPORT CABLE (24AWG*1PR+AL+D+MY)*5PCS+24AWG*4C+AB65% OD 9.5mm, JACKET BLACK, DRAWING NO. EAAB2405P2404C-791	H5DB01-0304K09F050	15220mm	M304
1	DISPLAYPORT 20PIN PLUG, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, PCB ASSEMBLY TYPE	A1YY35-0636	2	M636
No.	DESCRIPTION		Q'TY	Supplier

APPROVED	2015.11.25		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	陳瑞雯			
DRAWING	LIU			
DATE	23/NOV/15			
ITEM NO.		AYA-DP-50MM-24	UNIT:mm	