



Dimensions

Unit: mm

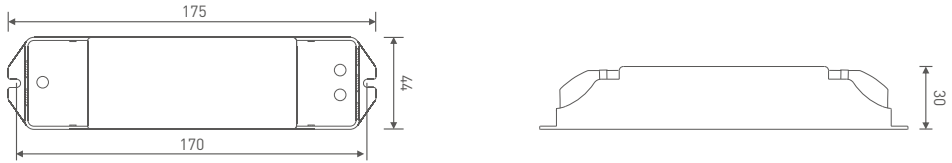

Connections

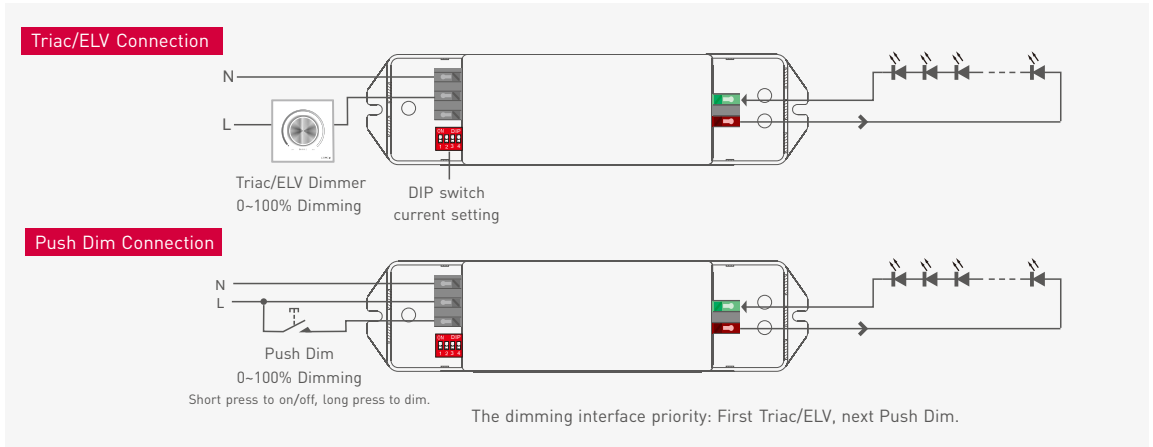

LED Current Selection

DIP switch for 16 optional currents' quick selection

DIP switch																						
Output current	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA														ON OFF
Output voltage	9-54V	9-54V	9-54V	9-54V	9-54V	9-51.5V	9-48V	9-45V														
Output power	4.05-24.3W	4.5-27W	4.95-29.7W	5.4-32.4W	5.85-35.1W	6.3-36.05W	6.75-36W	7.2-36W														

DIP switch																						
Output current	850mA	900mA	950mA	1000mA	1050mA	1100mA	1150mA	1200mA														ON OFF
Output voltage	9-42V	9-40V	9-38V	9-36V	9-34V	9-33V	9-31V	9-30V														
Output power	7.65-35.7W	8.1-36W	8.55-36.1W	9-36W	9.45-35.7W	9.9-36.3W	10.35-35.65W	10.8-36W														

* After current setting by DIP switch, power off and then power on to make the new current effective.

* E.g. LED 3.2V/pcs: 9-54V can power 3-18pcs LEDs in series, 9-21V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.

Push Dimming



Reset switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.

* No further notice if any changes in the manual.

Product function depends on the goods.

Please feel free to contact our official distributor if any question.