


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 6 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

L
915±30MM
1830±30MM
3050±40MM
4575±50MM

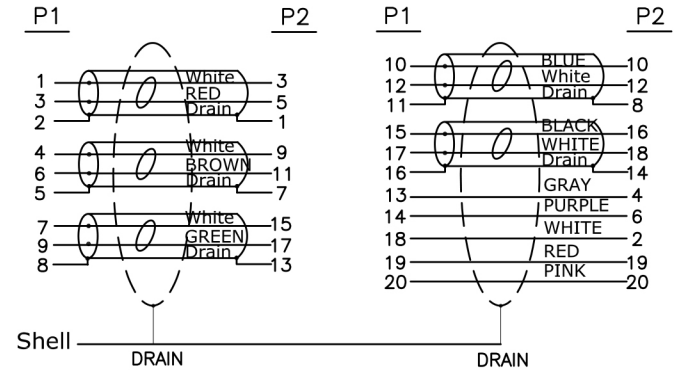

12	DisplayPort M ABS Under the Shell Color: Black	1	pcs
11	DisplayPort M ABS On the Shell Color: Black	1	pcs
10	DisplayPort Port M 28AWG cable clip	1	pcs
9	DisplayPort Port M Insulation Black Shell Gold Plated	1	pcs
8	DisplayPort M Transparent dust cover	1	pcs
7	HDMI M Transparent dust cover	1	pcs
6	H. S. T: φ1.5*16mm Color: Black	0.032	m
5	DP TO PCB 28AWG cable clip	1	pcs
4	Transparent PE	4	g
3	45P PVC Color:Black	10	g
2	DPH12M-15FT~With PCBA	1	pcs
1	DP~UL20276~(7/0.127TA*1PR+EAM)*5+7/0.127TA*5C+AEB 85% OD:7.3MM Color: Black Marking:DisplayPort Cable...	L	m
NO	DESCRIPTION	Q'TY	UNIT

	TOLERANCE		AYAGROUP			
	INCHES	M/M				
	.X	.015 .30				
	.XX	.010 .10	TITLE: DP TO HDMI M			
	.XXX	.005 .05	CUSTOMER :			
DRAWN BY			CUSTOMER P/N : DP-HDMI-4K-XX			
CHECK BY			SCALE	NONE	DRAWING NO.:	REV. A01
APPD BY			UNIT	MM		
			DATE	2017.02.20		1/1