


P1:	M-Y269D
	M-269D
P2,P3:	M-Y269A
	M-269A
P4:	M-426C

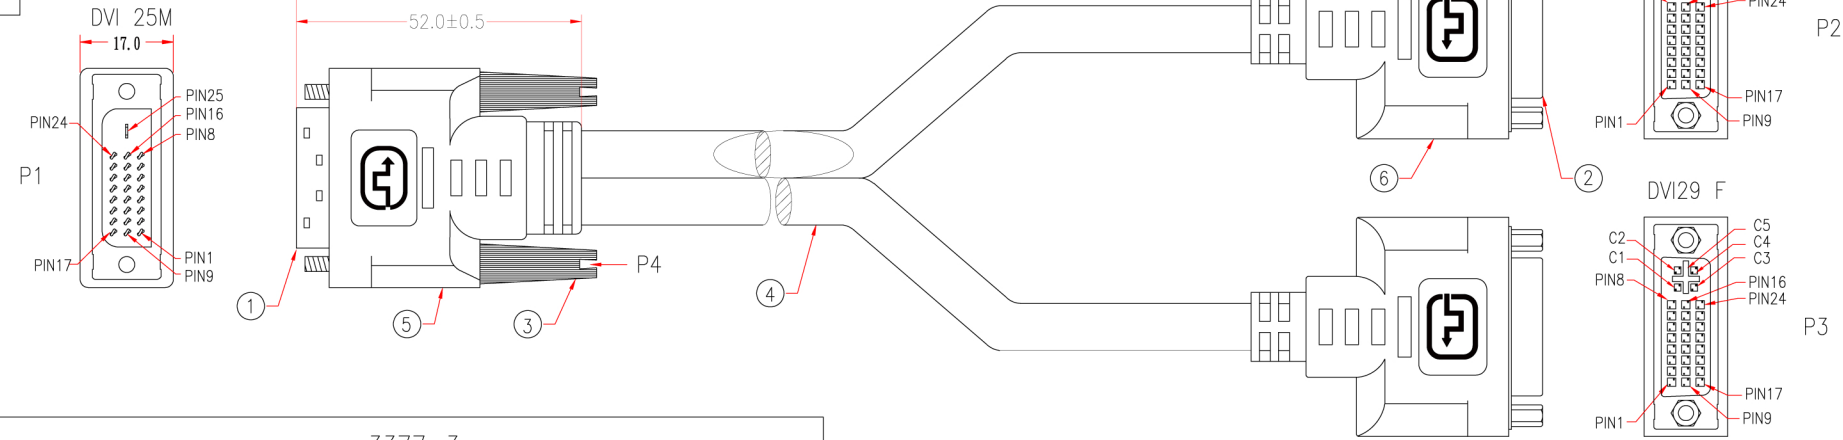

3377-3

P1	P2	P1	P3
1	1 BROWN	1	1 BROWN
2	2 WHITE	2	2 WHITE
3	3 SHIELD	3	3 SHIELD
4	4 RED	4	4 RED
5	5 WHITE	5	5 WHITE
3	3 SHIELD	3	3 SHIELD
6	6 RED	6	6 RED
7	7 PURPLE	7	7 PURPLE
9	9 ORANGE	9	9 ORANGE
10	10 WHITE	10	10 WHITE
11	11 SHIELD	11	11 SHIELD
12	12 YELLOW	12	12 YELLOW
13	13 WHITE	13	13 WHITE
11	11 SHIELD	11	11 SHIELD
14	14 ORANGE	14	14 ORANGE
15	15 YELLOW	15	15 YELLOW
16	16 WHITE	16	16 WHITE
17	17 GREEN	17	17 GREEN
18	18 WHITE	18	18 WHITE
19	19 SHIELD	19	19 SHIELD
20	20 BLUE	20	20 BLUE
21	21 WHITE	21	21 WHITE
19	19 SHIELD	19	19 SHIELD
23	23 GREY	23	23 GREY
24	24 WHITE	24	24 WHITE
22	22 SHIELD	22	22 SHIELD
SHIELD	SHIELD	SHIELD	SHIELD

\* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
5&6	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No. EH002601C-013	3	M304
	BLACK HEAT SHRINK TUBE 0.8*20mm	3	M743
	BLACK HEAT SHRINK TUBE 2.0*4mm	28	M743
	BLACK HEAT SHRINK TUBE 1.5*2mm	28	M743
	BLACK HEAT SHRINK TUBE 0.8*5mm	28	M743
	COPPER FOIL 33*90mm	3	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	UL20276 [(28AWG*1P+D+FAM)*7pcs+(28AWG*1PAIR)+(28AWG*3C)]+AM+B OD 8.6mm, JACKET BEIGE, DRAWING No. EAAB2807P2801P2803C-287	290mm*2	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	2	M95
2	DVI29 FEMALE AND HEX-NUT(4.75*5.5mm),GOLD FLASH ON CONTACTS & GOLDED METAL HOOD, WHITE INSULATOR	2	M105
1	DVI25 MALE, GOLD FLASH ON CONTACTS & GOLDED METAL HOOD, BLACK INSULATOR	1	M108

APPROVED	CHECKED	DRAWING	DATE	ITEM NO.	UNIT:mm	Supplier
	HU	JIANG	23/FED/10			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm



**DVI SPLITTER**

CHECKED

