


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 5ohm(MAX)
3. Insulation Resistance: 10Mohm(MIN) DC 300V

Notice:

1. P1 end is peeled 22mm. Drain wire is retained 22mm. Core wires is retained 15mm.
2. P2 end is peeled 18mm. Drain wire is retained 18mm. Core wires is retained 13mm.

Pin Assignment

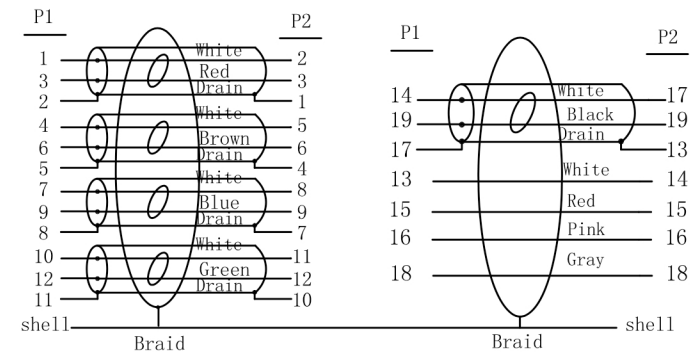

NO	DESCRIPTION	Q'TY	UNIT
10	black tube: ϕ 1.5*16mm	0.032	m
9	black tube: ϕ 0.6*6MM	0.03	m
8	black tube: ϕ 2.5*10mm	0.1	m
7	MINI HDMI M transparent PVC dust cover	1	pcs
6	HDMI M transparent PVC dust cover	1	pcs
5	outside molding:45P black PVC	16	g
4	inside molding:transparent PE	3	g
3	MINI HDMI M 19P~with PCB board~shell gold plated~Pin gold plated~black rubber core	1	pcs
2	HDMI M 19P~black rubber core~Pin gold plated~shell gold plated	1	pcs
1	UL20276 (7/0.10T*1PR+EAM)*5C+7/0.10T*4C+AEB AL-Braid(16*4/0.12) OD:6.0MM black IGH SPEED HDMI® CABLE WITH ETHERNET...	L	m

REV.	ECN.	DESCRIPTION	DATE	NAME
TOLERANCE INCHES M/M		 15181 Fairfield Ranch Road #100 Chino Hills, CA 91709 Tel: (909) 597-0883 www.comtop.com	TITLE: HDMI A M TO C M 30AWG 02#/07# GOLD	
.X	.015		.30	CUSTOMER :
.XX	.010		.10	CUSTOMER P/N :
.XXX	.005	.05	SCALE	NONE
DRAWN BY	Hong	UNIT	MM	DRAWING NO.:
CHECK BY		DATE	2019.01.14	10HM-34130-XX
APPD BY				REV. A01
				1/1