P1:	M-Y536A
	M-536A
P2:	M-780A

Customer No.:	No. 1

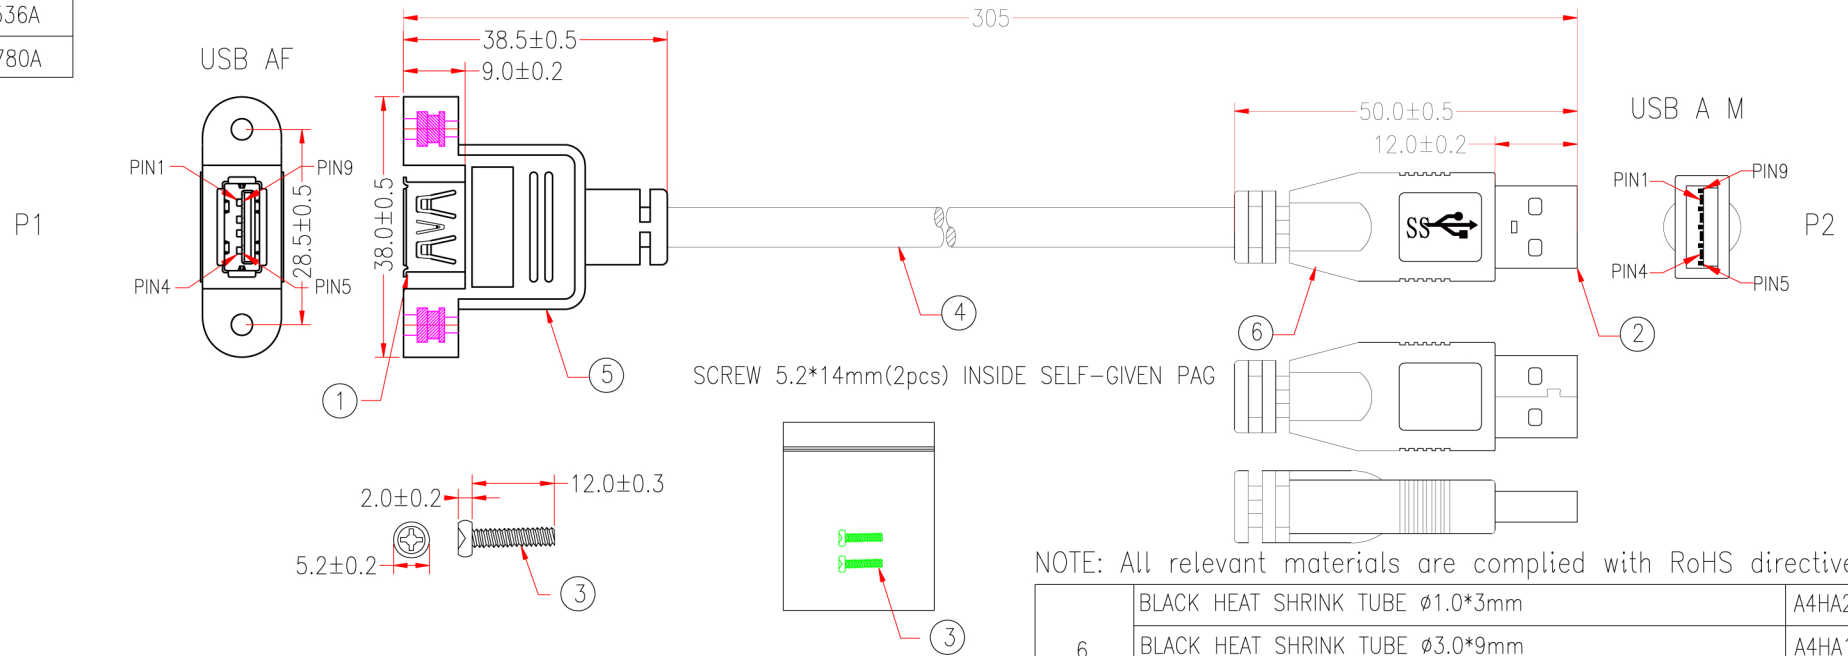

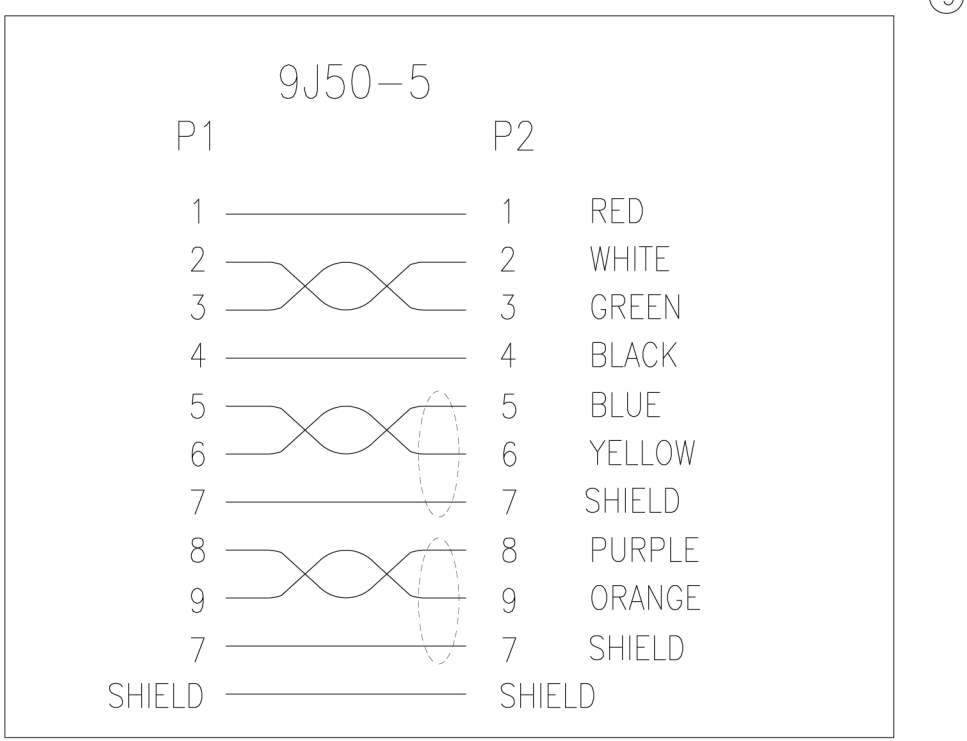

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
6	BLACK HEAT SHRINK TUBE ø1.0*3mm A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ø3.0*9mm A4HA10-0959	2	M959
	MOLDED PVC BLACK H1BF01-0304K09		M304
5	NON-UL 24AWG INSULATOR WIRE, LENGTH 20mm, JACKET ORANGE, DRAWING No. EH002401C-028 H5SG03-0304E01	1	M304
	BLACK HEAT SHRINK TUBE ø1.0*10mm A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ø3.0*9mm A4HA10-0959	2	M959
	HEX-NUT 5*4.0mm, #4-40 A6BC01-0095	2	M95
	ALUMINUM FOIL 25*65mm A6MA03-0579	1	M579
	MOLDED PE COLOR TRANSPARENT A5BA02-0280		M280
	MOLDED PVC BLACK H1BF01-0304K09		M304
4	USB 3.0 CABLE,28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID,OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333 H5KS02-0304K09	285mm	M304
3	SCREW 5.2*14mm, 4-40# A6AC12-0095	2	M95
2	USB A MALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATOR, SHORT TYPE A1HA48-0656	1	M656
1	USB A FEMALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATION A1HC19-0432	1	M432

APPROVED	2014.11.14 陳瑞雯	AYA GROUP	Cable Length Unless Other Spec. Tolerances:	
CHECKED	HU		0 ~200mm	±10mm
DRAWING	ZHU		201~1000mm	±20mm
DATE	23/OCT/14	ITEM NO. 10U3-PM321xx-E	1001 ~1500mm	±25mm
			1501~2100mm	±30mm
			2100mm↑	±40mm
			UNIT:mm	

		CHECKED	