


PIN Assignment

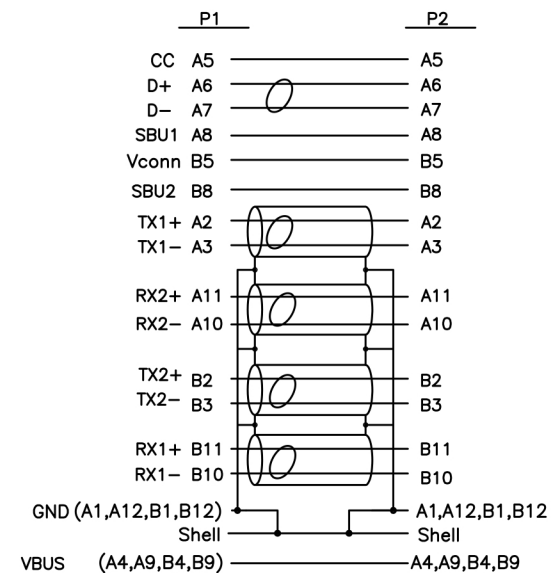

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

L	
915±20MM	
1830±30MM	
3050±50MM	

Resolution: 1920*1200

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE			TITLE: USB TYPE C	
				INCHES	M/M			
6	Transparent PE	6	g	.X	.015	.30	CUSTOMER : CUSTOMER P/N : 10UC-CVC	
5	45P PVC Color: Black	12	g	.XX	.010	.10		
4	SCREW: #4-40UNC 2.8*58.25MM	2	pcs	.XXX	.005	.05		
3	USB3.1 C Type Connector With PCB SHELL Gold Plated	1	pcs	DRAWN BY			DRAWING NO.:	
2	UTCV-9FT With PCB SHELL Gold Plated	1	pcs	CHECK BY				REV. A01
1	USB 3.1 [3 4 AWG (7 / 0 . 0 6 T C) + E A M] * 4 P + 3 2 AWG (3 2 AWG (7 / 0 . 0 8 T C) * 4 C + A B (1 6 / 1 0 / 0 . 0 8 8 5 % T C)	L	m	APPD BY			DATE	
							2018. 05. 04	1/2