




METIS-15SPW2.1
METIS-18SPW2.1
HIGH POWER ACTIVE (2.1) SUBWOOFER

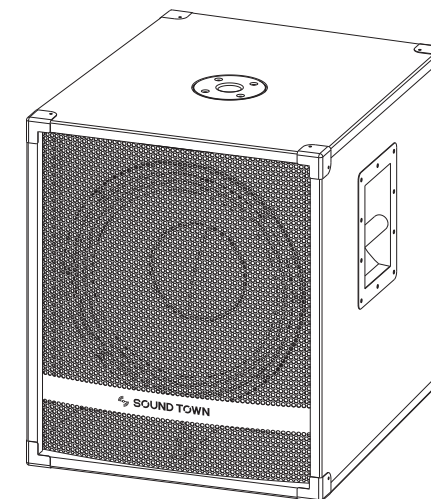


Sound Town Inc. Accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice.

For the applicable warranty terms and conditions, including additional information regarding Sound Town's limited warranty, please find details online at:

<https://www.soundtown.com/pages/return-warranty>

PRODUCT INSTRUCTIONS

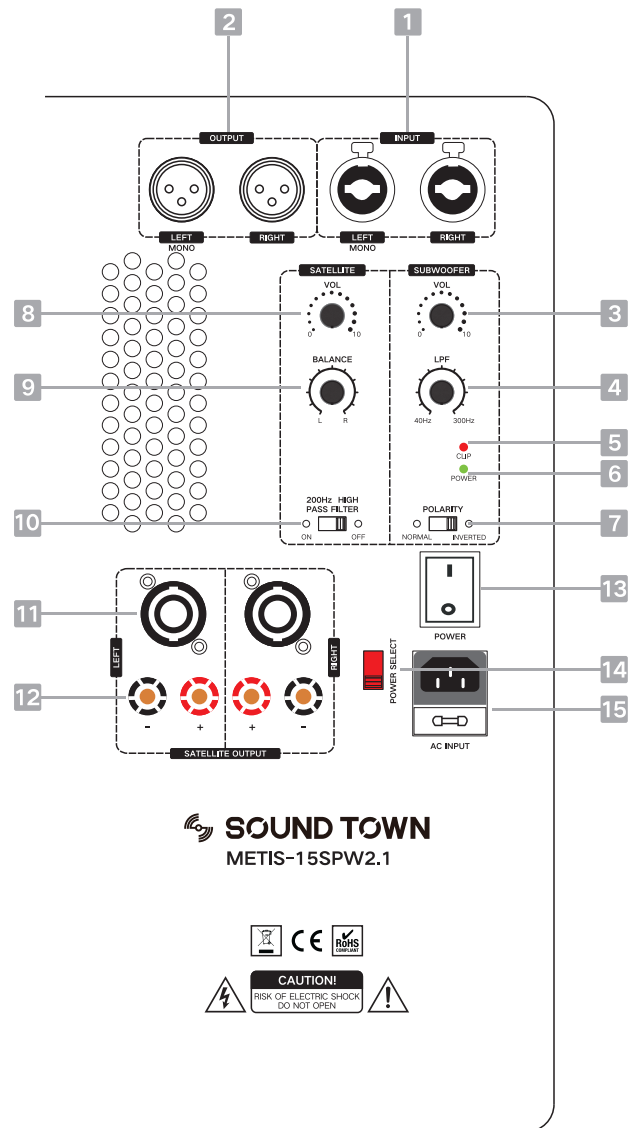

1. Input - Two balanced 1/4"/XLR combo jack are provided. This allows for stereo input from two separate feeds. The subwoofer will work with only one input connected.
2. Output - Two full-range passthrough XLR outputs are provided. These outputs are not affected by the LPF and will send a full-range signal on the rest of your PA setup.
3. Subwoofer Volume Control - This controls the gain of the input signal. It will raise and lower the volume of the subwoofer. Standard usage is setting this control at 50%.
4. LPF Control - Low Pass Filter, this controls how much high frequency is filtered out of the signal and how much of the higher bass frequencies are left in the signal. This does not add bass to the signal, it determines how much high frequency is cut out of the signal. Setting this control to the middle usually works best.
5. Clip LED indicator lights up when the amplifier is near clipping. An occasional flickering is acceptable. If LED is lit continuously adjust the Level control and reduce the output level of connected sources. Failure to do so may lead to premature failure of your speaker.
6. Power LED will light when the subwoofer is turned on.
7. Polarity switch button reverses polarity of subwoofer and is dependent on the placement of the subwoofer relative to the speakers.
8. Satellite Volume Control - This controls the gain of the output signal to the satellite speaks.
9. Balance - This controls the pan of the sound in the stereo mix. It enables you to bias the output towards one side or another, if needed.
10. 200Hz High Pass Filter - On/Off switch to remove low frequencies from the satellite speaker output.
11. Power Output - Two Speakon connectors for powering satellite speakers. They will deliver 150W RMS at 8 ohms. Not recommended for 2 or 4 ohms loads.
12. Power Output - Two binding post connectors for powering satellite speakers. You can use either Speakon or Binding post for powering out but don't use both at the same time.
13. Power Switch
14. Voltage selection-This switch is supplied for moving the unit from 115 voltage (US Standard) to 230 voltage (European Standard). The switch needs to be set on the proper voltage for your area.
15. IEC input - This receptacle is for connecting the included IEC power cable. It is important to supply the proper AC line voltage to the unit. Do not connect to intermittent or faulty power.