

dormakaba 🚧

The Grange Digital entry pull handle

Outstanding design - Access control entry pull handle

Our new digital door lock is The Grange entrance pull handle; manufactured using the finest materials to combine the highest standards in quality, functionality and design.

Perfect for both residential and commercial applications. The Grange offers both security and convenience with keyless entry.

Available Finishes

- · Satin Stainless Steel SSS
- Black Powder Coat BLK

Download and Install the app







Google Play

Advantages at a glance:

- Integrated keyless entry
- Operated by pin, fob or mobile phone
- Bluetooth
- Back to back pull handle
- Secured with a heavy-duty deadbolt
- · Anti-bumping key cylinder












Hallam VIC 3803 T: 1800 675 411

dormakaba New Zealand Building P, 61-69 Patiki Road


Specifications

U	s	er	Pa	rar	ne	ter	5
---	---	----	----	-----	----	-----	---

Oser i didilieters			
Methods	Bluetooth, RFID card/fob, pin code		
Bluetooth	via dormakaba SmartLock app		
Card/Fob	RFID Mifare 13.56Mhz—4 fobs included		
Pin Code	Adjustable to accept 6 to 12 digits		
Storage	Up to 100 cards/fobs and/or codes can be programmed Up to 10 Bluetooth devices can be paired to one lock Up to 10 locks can be registered to one SmartLock app		
App Specifications			
Platform	iPhone (iOS 8.0 and above) Android-based smart phone (Android 5.0 and above)		
Verification methods	Fingerprint*, gesture and password *if the smartphone is equipped with fingerprint sensor		
Device management	Add/delete/modify device, device information and notification		
Functions	Open/close lock, time sync, key sharing and audit trail		
Mechanical Features			
Construction	316 stainless steel pull handle secured with a heavy-duty tubular deadbolt		
Keypad	12 key Illuminated touch screen keypad		
Power	Eight AA alkaline batteries (included)		
Backset	Adjustable 60 mm or 70 mm		
Minimum stile	102mm wide		
Weight	4.6kg		
Alarms	Low battery alarm Anti-tamper lockout after 5 invalid attempts for 3 minutes		
Installation			
Door preparation	Minimal door preparation - requires a 50mm primary hole		
Door thickness	35mm to 50mm		
Items supplied	Pair of pull handles, tubular deadbolt, roller latch, screw pack 4 RFID fobs, installation instructions, drilling template, users guide and an allen key Batteries are not included		
Operating environment	Temperature (°C) -10~55° Humidity (%) 10-90 Note: ensure lockset is not directly exposed to water		
Warranty	12 months		
Available finishes	Satin Stainless Steel - SSS Black Powder Coat - BLK		
	Black Toward Code BEIX		

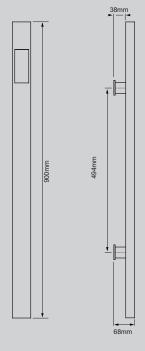

The Grange Exterior

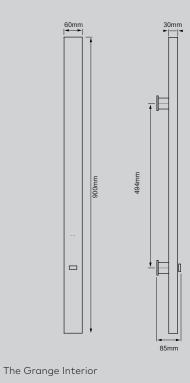

Item	Article Number	Unit	Description	Finish
Grange SSS	945700500701	Each	The Grange Entrance Pull Handle	SSS
Grange BLK	945700500706	Each	The Grange Entrance Pull Handle	BLK
Dummy Handle SSS	9457005017001	Each	The Grange Dummy Handle	SSS
Dummy Handle BLK	9457005017006	Each	The Grange Dummy Handle	BLK
Grange Fob	9459005017000	Each	The Grange Key Fob Tag	