



ASMODUS
SPECIFICATIONS

.blank


Technical Parameters:

Material: Stainless Steel
Weight: 35g
Thread: 510
Size: 24x33mm

Kit Inclusions:

- 1 x .blank RDA
- 2 x Oni Triple Fused Clapton Coils (0.2ohms each)
- 2 x Hex Tool
- 1 x Squonker center pin
- 1 x Spare Parts pack
- 1 x User Manual

Parts:

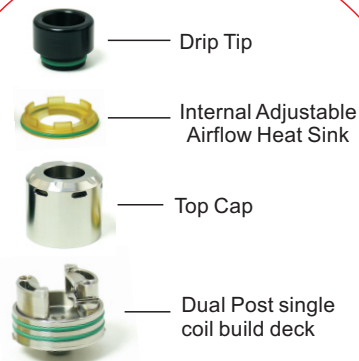

Top Cap and Build Deck:



Important Notice:

This Rebuildable Dripping Atomizer is only for highly experienced vapers. Building coils should be supported with a wide knowledge about **OHM'S LAW**.

Please read carefully and use Ohm's Law for your safety. Only use tested devices that support the resistance of your coil build. Only use devices that support safety cut-offs for high operating temperature, too low of coil resistance, hot battery operation and the like. Please check our website, ASMODUS.com, for more information regarding safe operation and Proper battery usage guides.

Air Flow Management:

Install the .blank on your favorite device. Hold the base of your device firmly the top cap of the RDA in either direction (left or right) while checking the vent hole until your desired air flow is achieved. Check airflow levels by intaking from the RDA. Once the airflow is intaking at your desired level, fire the device while drawing to fine tune your vaping experience by adjusting accordingly.



How to build the RDA:

1. Before starting, make sure your hands are clean.
2. Take the .blank apart and clean with warm water.



3. Installation of pre-wrapped coil: Place the ends of the coil between the posts and position it directly at the center of the airhole then tighten the grub screws. Adjust the coil to ensure it is not touching the base.
4. Cut the excess leads off as close to the deck as possible.
5. Cut a strip of cotton and make sure it's not too much and not too little, just enough to catch juice on both sides.
6. Insert the cotton through the coil and adjust it as necessary.



7. Cut the ends of the cotton at an angle to get desired length for proper wicking.
8. Wet the coil with your e-liquid and adjust the cotton.

Warning: Coils must be checked for resistance before firing with a device. Recheck periodically to ensure resistance remains the same. If you need any additional information or have any questions about the product or its use, please contact your local ASMODUS agent or visit our website at www.asmodus.com



Converting to squonk RDA

This RDA can be used as a squonker RDA for bottom feeding devices. This kit has an extra pin that can convert the RDA from a regular 510 pin to a squonker 510 pin by simply unscrewing the regular pin and replacing it with the supplied 510 squonker pin.



Attention:

1. Please read the manual properly before use.
2. Connect the atomizer to a power source that can handle sub-ohm coils.
3. Please avoid ingesting e-liquid.
4. Please do not keep any liquid inside the atomizer if the device is not going to be used for elongated periods of time.
5. Please refill the dripper when the cotton is almost dry to avoid dry-burning the atomizer.
6. Please do not drop, throw or mishandle this product as the outer shell or inner components may sustain damage.
7. In order to prolong the lifespan of your product please keep it away from extreme temperatures and highly humid environments

8. Please keep this product away from children and pregnant women.

Legal Disclaimer:

Underage sale is prohibited depending on your country's /region's legal smoking age. 18+ and 21+ in other countries/regions.

WARNING:

This product is not intended for use by persons under legal smoking age, non-smokers, pregnant or breastfeeding mothers, or persons with or at risk of heart disease, high blood pressure, diabetes, or taking medications for depression or asthma.