




FEATURES

- 1/2.9" F33 CMOS Sensor, 2.0MP
- 1920*1080 HD Video output
- High speed, long distance real-time transmission
- Waterproof Bullet Camera
- D-WDR, DNR, BLC, AGC, AWB
- 3.6 mm fixed lens, external adjustable
- 2 pcs LEDs, Max. IR LEDs length 20 m.
- IP66, DC12V

DIMENSIONS

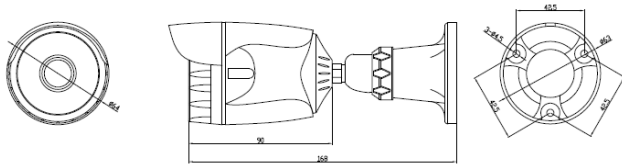

SPECIFICATION

Camera	
Image Sensor	1/2.9" F33 CMOS Sensor, 2.0MP
Effective Pixels	1920(H)*1080(V)
Electronic Shutter	1/25s~1/45,000s
Video Frame Rate	25/30fps@1080P
Image System	PAL/NTSC
Min. Illumination	0.01Lux@F1.2, 0Lux (IR ON)
S/N Ratio	≥50dB
Video Output	1-channel BNC AHD video output
Camera Features	
D-WDR	ON/OFF
Digital Noise Reduction	3D DNR
White Balance	ATW/MWB
Exposure Mode	Globe/Center/BLC/FLC
Defog	Auto/ON/OFF
AGC	Auto/Manual
Display Language	Chinese, English, French, Russian, Italian
Sharpness	1-20 Level Adjustable
Contrast	1-10 Level Adjustable
Color Gain	1-20 Level Adjustable
Lens	
IR LED	2pcs array leds, 20m IR range
Lens Type	3.6mm fixed lens, external adjustable
General	
Voltage	DC12V±5 %
Humidity	≤85%RH
Operation Temp.	-20°C~+50°C
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Others	Default: bracket included

