


BOL LED 030 MAINS

INSTALLATION INSTRUCTIONS

Installation

- Provide a mains supply to each BOL LED position.
- Either (a) Fix the BOL LED to a solid surface (e.g. hardened concrete) using a BOL LED BRACKET. (b) set the BOL LED in a soft location, ensuring it is firmly supported, or (c) fix the bollard and pour concrete around the base.
- BOL LED base dimensions are 95mm x 95mm
- Mains cable exit 265mm from base at the back of the BOL LED.
- Maximum buried depth - 250mm.
- Refer to the installation data below and connect the BOL LED mains cable to the mains supply. Use a suitable IP rated connector or junction box.

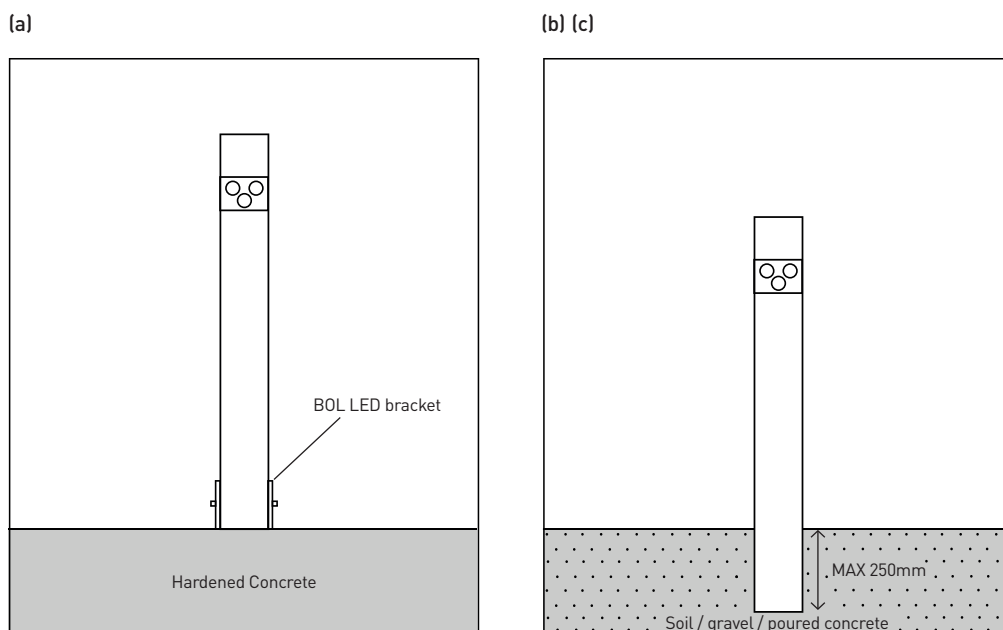

Installation data

- This unit must be wired by a qualified electrician or suitable competent person.
- BOL LED mains lead – 1.5mm² SY 2 core PVC steel braided x 1.8m. Brown = Live, Blue = Neutral.
- Rated wattage 5W
- Rated voltage 220-240V AC
- Input current 0.03A
- Inrush current 9A 0.8ms
- Double insulated electrics. No earth required.

Wood treatment

Wood treatment is necessary to prevent weathering and/or cracking.
Teak oil can be used to protect the wood and preserve the colour.
To stain, use a premium woodcare product to stain and protect.
Always follow the manufacturer's instructions, and reapply periodically as recommended.