

Description

CambridgeIC's CAM204 Central Tracking Unit (CTU) chip is a single-chip processor for position measurement. It implements the electronic processing for resonant inductive position sensing technology.

The CAM204 measures the position of contactless, inductively coupled targets relative to sensors that are built from printed circuit boards to CambridgeIC's design. A selection of sensor geometries is possible, including rotary and linear.

The Type 2&5 CTU Development Board is a PCB including the CAM204 CTU chip and external Type 2 circuitry. This is compatible with both Type 2 and Type 5 sensors.

Please refer to the CAM204 datasheet for more details on features and specifications of the CAM204 chip, and to the appropriate sensor datasheet for sensor details and performance.

Features

- CAM204 CTU chip
- Processes one Type 2 or one Type 5 sensor
- Test points for key CTU connections
- 14-way header for host interface connection
- 6-way headers for sensor connection

Applications

- Prototyping CTU chip based applications
- Processor board for position sensor solutions

Host Interface Connector P2		
Pin	Signal	Description
1	3V3	Supply voltage input 2.7V ... 3.6V
2	GND	Supply voltage return (0V)
3	IO1	User IO outputs
4	IO2	
5	IO3	
6	IO4	
7	GND	Supply voltage return (0V)
8	MOSI	Master Out Slave In input
9	nSS	Slave Select input
10	SCK	Serial Clock input
11	MISO	Master In Serial Out output
12	IO5	Not connected
13	IO6	
14	nRST	CTU chip reset input

Product identification	
Part no.	Description
013-5028	Type 2&5 CTU Development Board

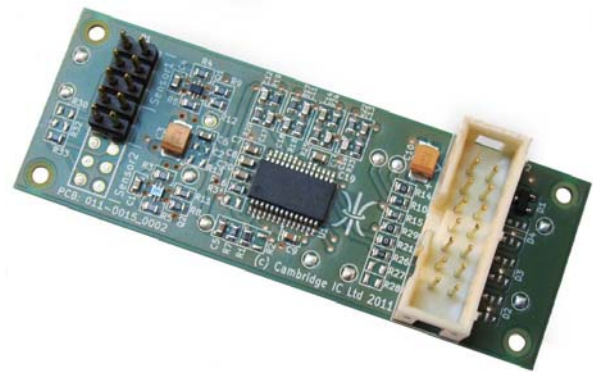


Figure 1 Type 2&5 CAM204 Development Board

Pinout of Sensor Connector P1		
Pin	Signal	Description
1	EX+	Excitation coil + connection
2	VREF	Common return for sensor coils
3	EX-	Excitation coil - connection
4	COSA	Fine sensor coil connection
5	VREF	Common return for sensor coils
6	SINA	Fine sensor coil connection
7	VREF	Common return for sensor coils
8	COSB	Coarse sensor coil connection
9	VREF	Common return for sensor coils
10	SINB	Coarse sensor coil connection

1 Component Layout and Schematic

Figure 2 shows the location of the Type 2&5 CTU Development Board's components, connectors and their pin numbers, and mechanical dimensions. Figure 3 shows the board's schematic.


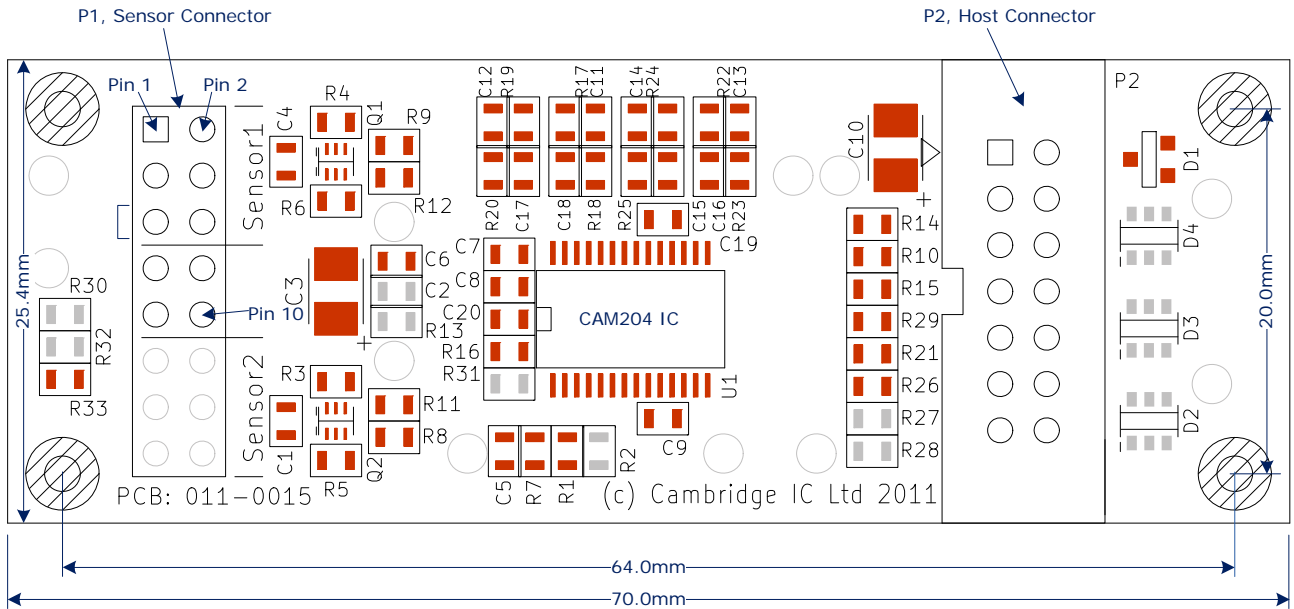


Figure 2 Component layout and dimensions

Figure 3 Type 2&5 CTU Development Board Schematic

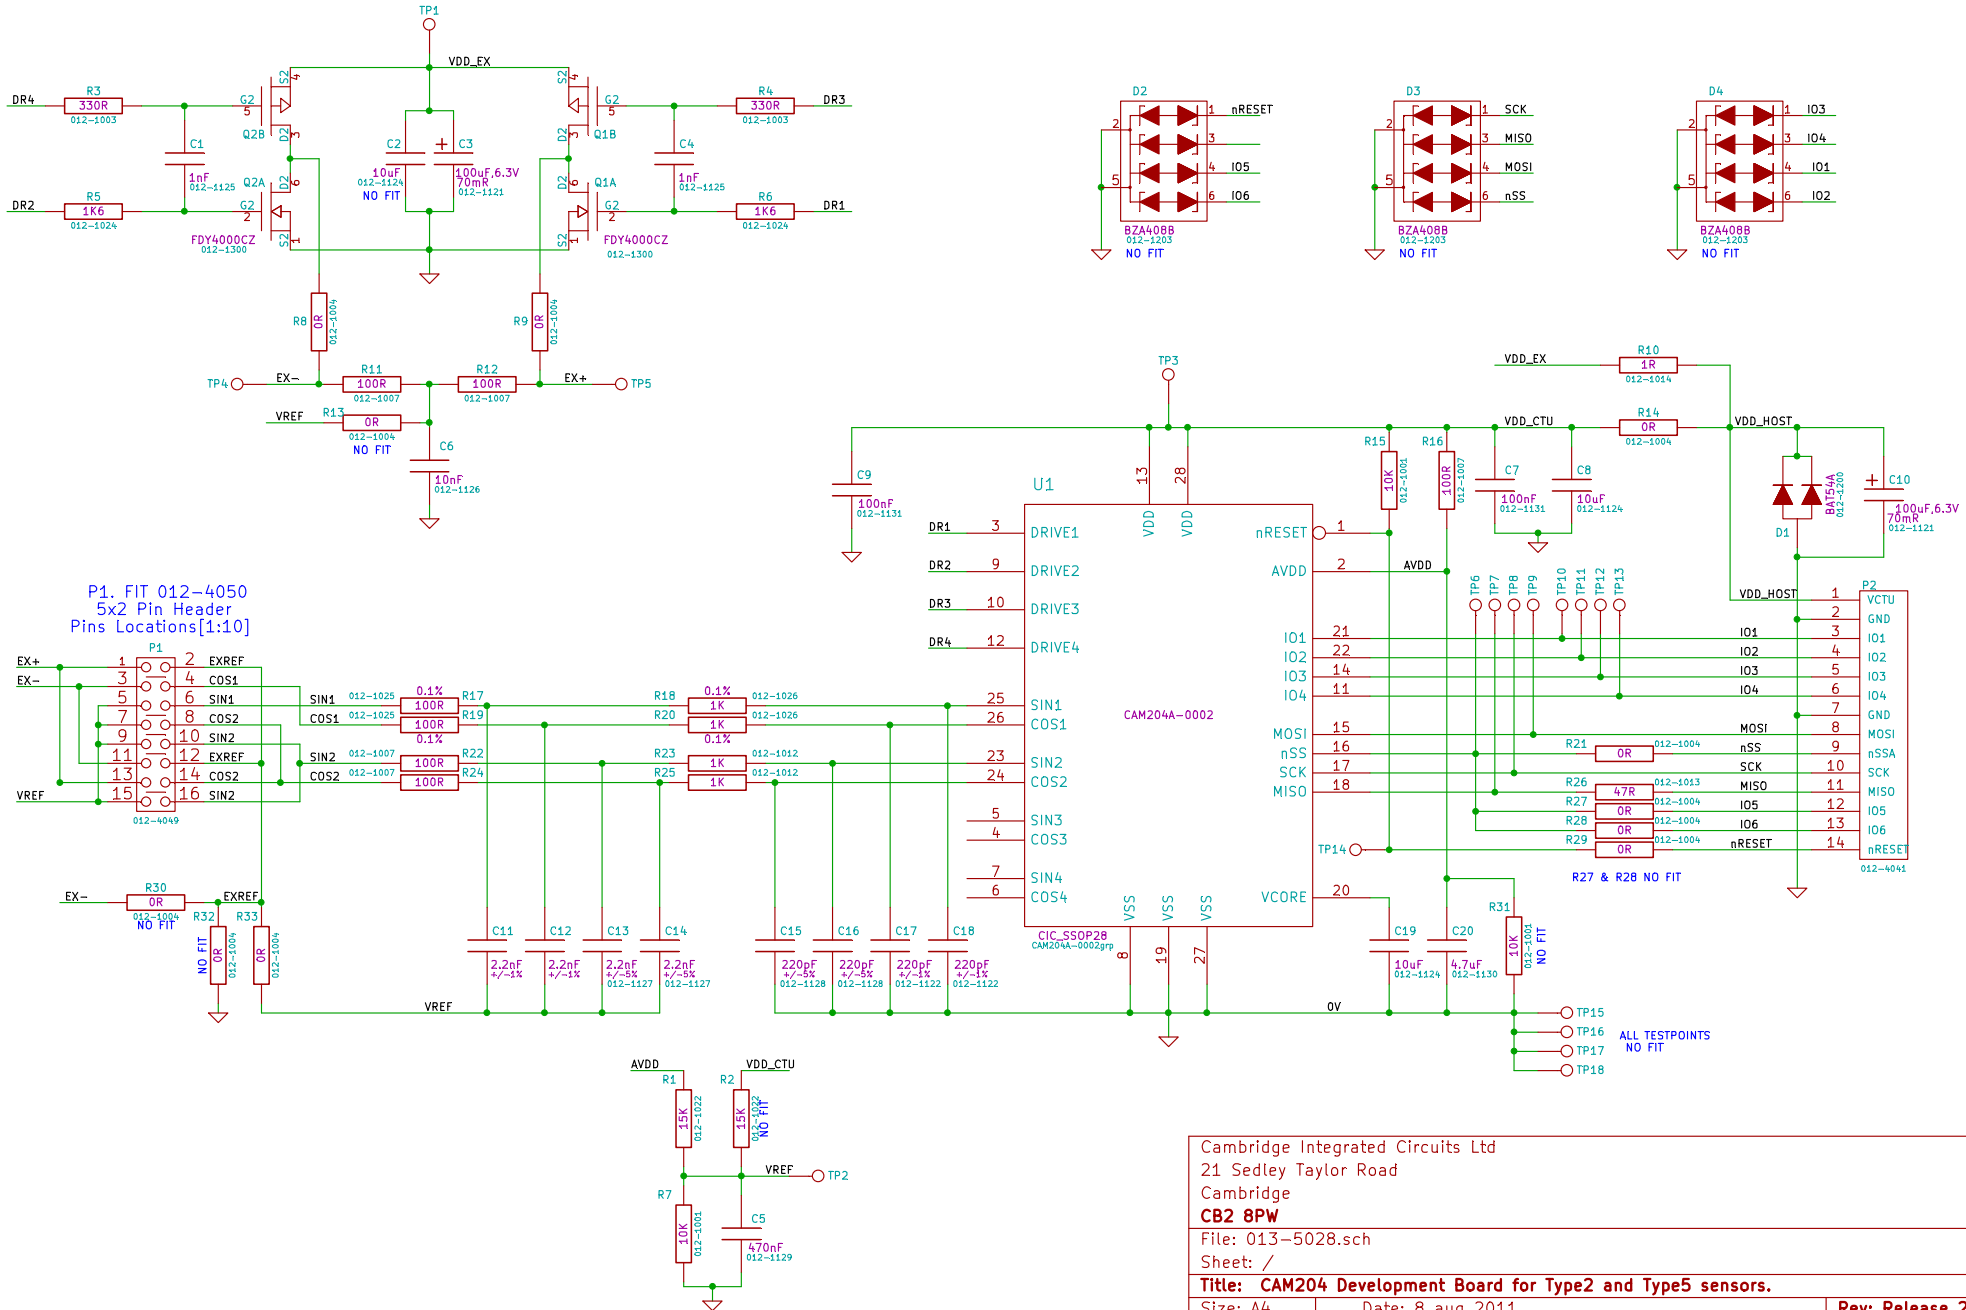

Cambridge Integrated Circuits Ltd
21 Sedley Taylor Road
Cambridge
CB2 8PW

File: 013-5028.sch
Sheet: /

Title: CAM204 Development Board for Type2 and Type5 sensors.

Size: A4 Date: 8 aug 2011

Rev: Release 2

KiCad E.D.A. eeschema (2011-07-08 BZR 3044)-stable

Id: 1/1

2 Document History

Revision	Date	Reason
0001	16 March 2012	First draft

3 Contact Information

Cambridge Integrated Circuits Ltd
21 Sedley Taylor Road
Cambridge
CB2 8PW
UK

Tel: +44 (0) 1223 413500

info@cambridgeic.com

4 Legal

This document is © 2012 Cambridge Integrated Circuits Ltd (CambridgeIC). It may not be reproduced, in whole or part, either in written or electronic form, without the consent of CambridgeIC. This document is subject to change without notice. It, and the products described in it ("Products"), are supplied on an as-is basis, and no warranty as to their suitability for any particular purpose is either made or implied. CambridgeIC will not accept any claim for damages as a result of the failure of the Products. The Products are not intended for use in medical applications, or other applications where their failure might reasonably be expected to result in personal injury. The publication of this document does not imply any license to use patents or other intellectual property rights.