




## FEATURES

- Up to 16 channel IP camera input
- H.265/H.264 codec decoding
- Max 200Mbps Incoming Bandwidth
- Up to 8MP Resolution for Preview and Playback
- HDMI/VGA simultaneous video output
- Support IPC UPnP
- Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotec and etc.
- ONVIF Version 2.4 conformance, CGI Conformant
- 3D intelligent positioning with Dahua PTZ camera
- Support 2 SATA III Port, Up to 6 TB capacity for each HDD
- Support ANR technology to enhance the storage reliability when the network break down
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

## DIMENTION

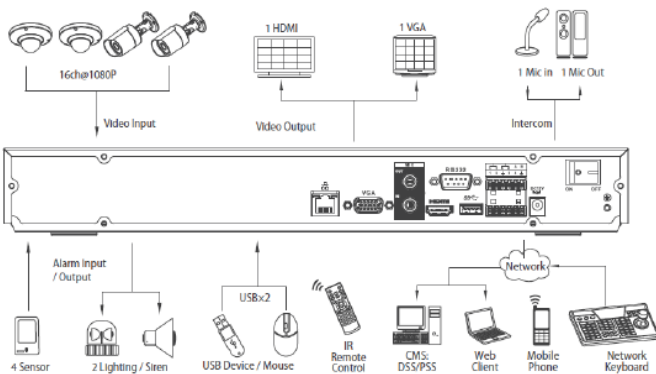

## SPECIFICATION

<b>System</b>	
Main Processor	Quad-core embedded processor
Operating System	Embedded LINUX
<b>Video &amp; Audio</b>	
Input	16 channel
Two-way Talk	1 channel Input, 1 channel Output, RCA
<b>Display</b>	
Interface	1 HDMI, 1 VGA
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Recording</b>	
Video/Audio Compression	H.265/H.264
Resolution	8Mp/ 6Mp/ 5Mp/ 4Mp/ 3Mp/ 1080P/ 1.3MP/ 720P etc.
Record Rate	200Mbps
Bit Rate	16Kbps ~ 20Mbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Tampering, Video Loss), Stop
Record Interval	1 ~ 120 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Tampering
Alarm Input	4 Channel, Low Level Effective, Green Terminal Interface
Alarm Output	2 Channel, NO/NC Programmable, Green Terminal Interface
<b>Playback &amp; Backup</b>	
Sync Playback	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network
<b>Network</b>	
Ethernet	1 Independent 1000Mbps Ethernet Port
Network Functions	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, IP Search (Support Dahua IP camera, DVR, NVS, etc.), Easy4ip
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Interoperability	ONVIF 2.4, CGI Conformant
<b>Storage</b>	
Internal HDD	2 SATA III Port, Up to 6 TB capacity for each HDD
HDD Mode	Single
eSATA	N/A
<b>Auxiliary Interface</b>	
USB Interface	2 USB Ports (1 USB2.0, 1 USB3.0)
RS232	N/A
RS485	N/A
<b>General</b>	
Power Supply	AC 100~240V, 50/60 Hz
Power Consumption	NVR : 13.2W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa
Dimension(W×D×H)	1U, 375mm×327.5mm×53mm (14.8" x 12.9" x 2.1")
Weight	2.7kg (6.0 lb) (without HDD)
<b>Certifications</b>	
CE	EN55032, EN55024, EN50130-4, EN60950-1
FCC	Part 15 Subpart B, ANSI C63.4-2014
UL	UL60950-1+CAN/CSA C22.2 No.60950-1

