



NEW

Aeropleat® III

MERV 8 Standard Capacity Pleated Panel Filter

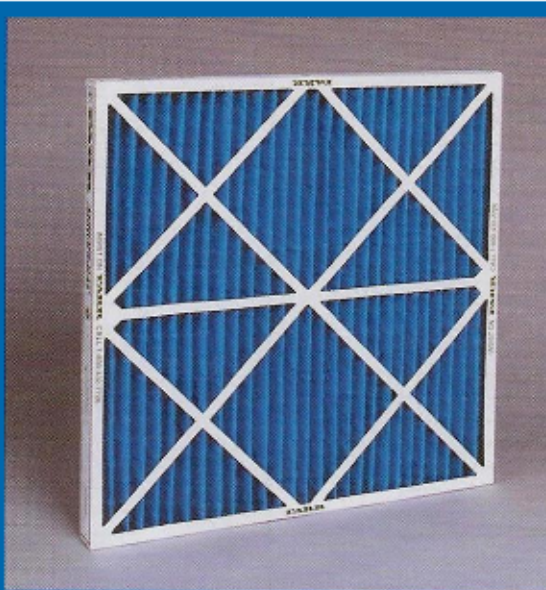

High-capacity, MERV 8 efficiency, and excellent service life for HVAC applications

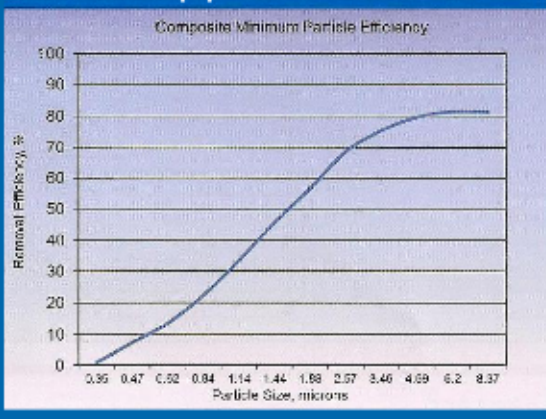

The efficiency chart above is extrapolated from particle size versus efficiency information when evaluated per ASHRAE Standard 52.2



Be green - Keep clean



The Camfil Farr Aeropleat® III pleated filter offers medium grade ASHRAE efficiency, and sets the performance standard for those upgrading from lower efficiency pleats, throw-aways or pads. The Aeropleat III has a MERV 8 when evaluated per ASHRAE Standard 52.2.

As a Stand-alone filter, the Aeropleat III will remove many contaminants associated with today's indoor air quality concerns. Available in 1", 2" and 4" depths, its increased media area offers an extended service life when compared to lower efficiency throw-aways or pads. Applications include commercial buildings, educational facilities and specialty manufacturing. As a prefilter, the Aeropleat III offers protection for the higher efficiency final filters required for today's high-technology applications.

- Has 10 pleats per linear foot (2" deep model with radial pleat design for full use of media area.
- The media is manufactured from **100% recycled materials** in accordance with Camfil Farr's sustainable initiatives.
- Includes a welded wire media grid that is treated for corrosion resistance and prevents media oscillation or pull-away. The wire grid is **manufactured from reclaimed metals** in accordance with Camfil Farr's sustainable initiatives.
- Has a high wet-strength beverage board frame that is bonded to the media to prevent air bypass. Diagonal support members at the same construction are bonded to be media creating a rigid and durable filter pack. **The filter will withstand 2.0" w.g without failure.**
- Is available in 1", 2" and 4" depths.

Camfil Farr	Product sheet
Aeropleat® III	1008 - 0910
Camfil Farr - clean air solutions	

www.DirtyFilters.com